



Actuator Style/Dimensions: in. [mm]

Rocker Switches

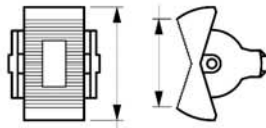


1.224[31.08]

1C
CROSS-LINE W/ONE LENS

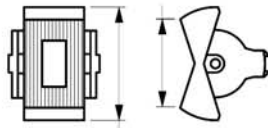


1.224[31.08]

1L
LONG-LINE W/ONE LENS

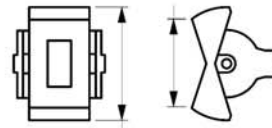

1.224[31.08]


1S
SMOOTH W/ONE LENS

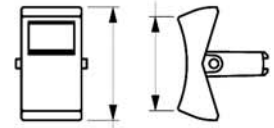

1.224[31.08]


6S
CURVED W/ONE LENS

Bracket Dimensions: in. [mm]

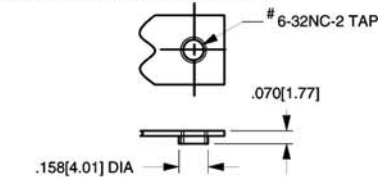


TAPPED HOLE

Standard with
A Bracket

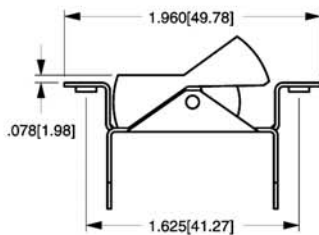


A






CLEARANCE HOLE

Standard with
C Bracket

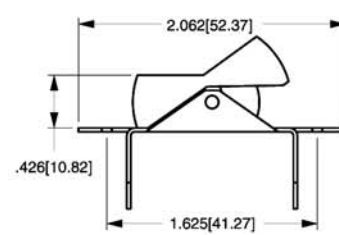

C

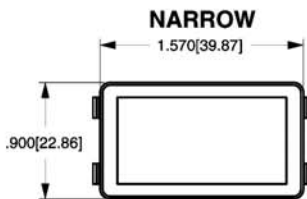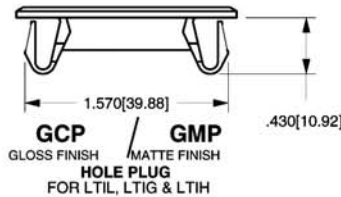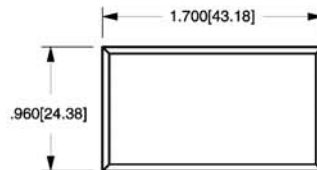


NARROW

1.570[39.87]

FN

METAL, SNAP-IN

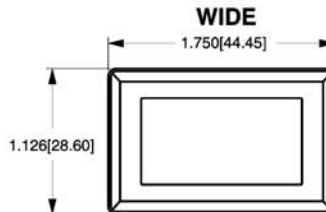


WIDE

1.750[44.45]

FW

METAL, SNAP-IN

MARINE / STD / WATERSHEDDING

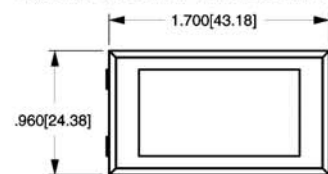

MBL, NBL, WBL

BLACK NYLON, SNAP-IN