




# Snap-Action Switches

# 2

# S W I T C H E S & K N O B S

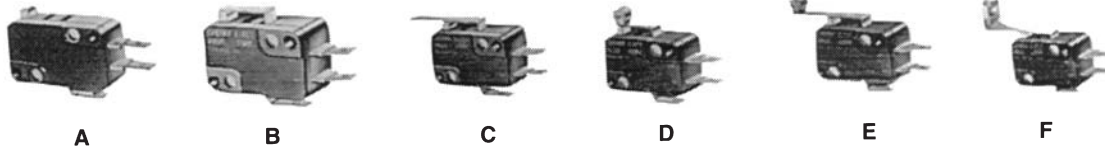

Long-lasting, miniature, snap-action switches with phenolic case. Coil spring mechanism. Rock-wipe contact action. Large overtravel. Wide, rounded wear-resistant acetal resin button. Integral hinged lever and roller actuators available in choice of 2 pivot positions. Contact rating from 3 to

15 available. All versions available with gold crosspoint contacts. .187" QC terminals standard; .250" QC, solder or screw terminals also available. SPDT versions listed. **Size:** 1.093" L x .406" W x .625" H. **UL Recognized. CSA Certified.**

Mfr. No.	Contacts	Max. Op. Force (Gms.)	Minimum Overtravel (Ins.)	Actuator Length (Ins.)	Fig.
<b>SERIES E22-STANDARD FORCE—3 AMPS</b>					
OE22-00AO	SPDT	75	.050	Button	A
OE22-00KO	SPDT	75	.040	.810	D
OE22-50KO	SPDT	35	.085	1.340	E
<b>SERIES E23-STANDARD FORCE—5 AMPS</b>					
OE23-00AO	SPDT	170	.050	Button	A
OE23-00HO	SPDT	170	.050	.865	B
OE23-00KO	SPDT	170	.040	.810	D
OE23-50HO	SPDT	86	.090	1.400	C
OE23-50KO	SPDT	86	.085	1.340	E
OE23-50PO	SPDT	86	.085	1.340	F
OE23-50NO	SPDT	86	.....	1.400	I
OE23-90NO	SPDT	86	.....	1.340	I
OE23-50HL	SPDT	170	.....	1.580	B
OE23-00PO	SPDT	170	.....	.810	F
OE23-50PO	SPDT	170	.....	1.340	F
<b>SERIES E33-STANDARD FORCE—10 AMPS</b>					
OE33-00AO	SPDT	285	.050	Button	A
OE33-00HO	SPDT	285	.050	.865	B
OE33-00KO	SPDT	285	.040	.810	D
OE33-00PO	SPDT	.....	.....	1.400	.....
OE33-50HO	SPDT	144	.090	1.340	D
OE33-50KO	SPDT	144	.085	1.340	E
OE33-50PO	SPDT	144	.085	.....	F
<b>SERIES E34-STANDARD FORCE—15 AMPS</b>					
OE34-00AO	SPDT	400	.050	Button	A
OE34-00HO	SPDT	400	.050	.....	A
OE34-00KO	SPDT	400	.040	.810	D
OE34-50HO	SPDT	200	.090	1.400	C
OE34-50KO	SPDT	200	.085	1.340	E

Mfr. No.	Contacts	Max. Op. Force (Gms.)	Minimum Overtravel (Ins.)	Actuator Length (Ins.)	Fig.
<b>SERIES E22-LIGHT FORCE—3 AMPS</b>					
OE22-00AX	SPDT	15	.050	Button	A
OE22-50HX	SPDT	8	.085	1.400	C
OE22-55HX†	SPDT	3½	.187	2.757	C
OE22-75HX†	SPDT	5	.130	1.580	C
OE22-85HX†	SPDT	2	.312	2.932	C
<b>SERIES E23-LIGHT FORCE—5 AMPS</b>					
OE23-00AX	SPDT	45	.050	Button	A
OE23-50HX	SPDT	22	.085	1.400	C
OE23-55HX†	SPDT	10	.187	2.757	C
OE23-75HX†	SPDT	14	.130	1.580	C
OE23-75KX†	SPDT	14	.120	1.516	E
OE23-85HX†	SPDT	6	.312	2.932	C
<b>SERIES E33-LIGHT FORCE—10 AMPS</b>					
OE33-00AX	SPDT	75	.050	Button	A
OE33-50HX	SPDT	37	.085	1.400	C
OE33-55HX†	SPDT	17	.187	2.757	C
OE33-75HX†	SPDT	22	.130	1.580	C
OE33-85HX†	SPDT	10	.312	2.932	C
OE33-00KX	SPDT	75	.....	.810	H
OE33-75KX	SPDT	22	.....	1.516	H
OE33-50NX	SPDT	37	.....	1.400	I
OE33-50PX	SPDT	37	.....	1.340	F
OE33-75PX	SPDT	22	.....	1.516	F
<b>SERIES E34-LIGHT FORCE—15 AMPS</b>					
OE34-00AX	SPDT	100	.050	Button	A
OE34-50HX	SPDT	50	.085	1.400	C
OE34-55HX†	SPDT	22	.187	2.757	C
OE34-75HX†	SPDT	30	.130	1.580	C
OE34-75KX†	SPDT	30	.130	1.516	E
OE34-85HX†	SPDT	13	.312	2.932	C

†Specify desired terminals: QC, screw or solder.

## SERIES E72 WEATHERPROOF



Cherry put a switch inside a switch, so it's water-resistant and weather-proof. The basic E72-40A is moisture-resistant and comes with insulated 10 inch, 16 gauge leads attached. Rated 10.1 amps, ¼ hp, 125/250 VAC. UL recognized. The E72 Series is also available with hinged, external actuator; Cherry part number E72-40H.

Mfr. No.	Actuator Description
<b>SERIES E72 STANDARD FORCE 10.1 AMPS</b>	
OE72-40AO OE72-40HO OE72-40KO	Button actuator Flat actuator Roller actuator
<b>SERIES E73 STANDARD FORCE, 10.1 AMPS</b>	
OE73-40HO OE73-40KO	Flat actuator Roller actuator