

SPECIFICATIONS


RATING: 15A 125V, 6A 250V AC
MECHANICAL LIFE: 15000 cycles
ELECTRICAL LIFE: 10000 cycles
CONTACT RESISTANCE: < 20 mΩ
INSULATION RESISTANCE: > 1000 MΩ
DIELECTRIC STRENGTHS: > 1500 volts 1 minute
 > 3000 volts between poles
SAFETY STANDARD APPROVAL: UL, CSA, VDE, NEMKO
 SEMKO, FIMKO, DEMKO

MATERIALS

BODY: Nylon 66
ROCKER: Polycarbonate
TERMINAL: Silver plated copper alloy
CONTACT: Coin silver, silver plated



HOW TO ORDER

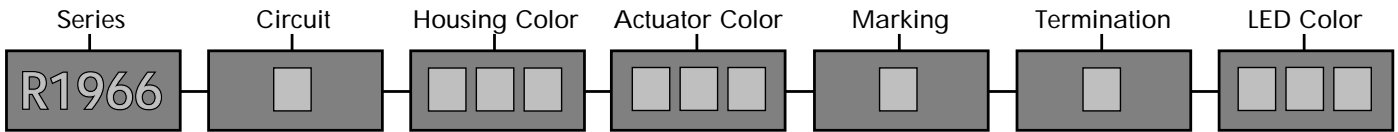

See Below

BLK=Black
 WHT=White
 GRY=Grey

BLK=Black
 WHT=White
 GRY=Grey
 RED=Red

- A
- B
- C
- D
- E
- F
- G
- H
- I
- J
- K
- L

F=Faston
 S=Solder Lug
 P=PC Pin
 R=Rt. Angle
 PC Pin

(R1966 "A"
 Circuit Only)
 RED=Red
 YEL=Yellow
 GRN=Green

(See Next
 Page For
 Description)

CIRCUIT CODE:

- A = SPST On-Off
- C = SPDT On-On
- D = SPDT On-Off-On
- E = SPST On-(Off)
- F = SPST (On)-Off
- G = SPDT On-(On)
- H = SPDT On-Off-(On)
- I = SPDT (On)-Off-(On)

(See Next Page
 For Description)

() = Momentary

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Example:

R1966 → A → BLK → BLK → A → F → YEL