


## 4775 SERIES "ROLLING CAM" SNAP-ACTION "SILVER-SAVER" SWITCHES LIGHT OPERATING FORCE — 75 gm MAX.

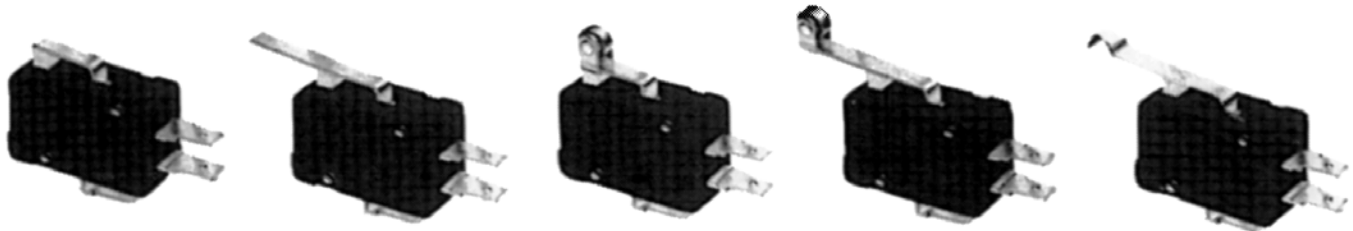

4775-1120

4775-1130

4775-1140

4775-1150


4775-1160

150,000,000 cycle reliability. Less bounce (1.5 msec.). Contact force of about 50% of operating force. Contacts are rated 10 amps at 125-250 VAC, 1/2 hp at 125-250 VAC, 4 A "L" at 125 VAC. Available with .187" x .200" spade terminals (standard); screw, solder and .250" spade terminals available. Specify by changing the fifth digit of the part number from "1" to "2" for screw, "3" for solder or "4" for .250" spade. SPDT switches are listed; SPST-N.O. and SPST-N.C. switches are available. **Case Size:** .875" W x

.5 H x 1 1/2" D. **Overall Width (Including Terminals):** 1 3/4". UL Recognized: CSA approved. Optional UL 100,000 cycle listing available; information on request. NOTE: These switches are also available in 6 amp, 250 VAC, 4776 Series SILVER-SAVER switches with silver-plated copper contacts, and 15 amp, 125-250VAC, 1/2 hp, 125-250 VAC 4777 Series. Packaged 10/ctn.

Mfr. No.	Actuator Type	Operating Force Max., Gm.	Release Force Min., Gm.	Movement Differential Max., In.	Pre-travel Max., In.	Total Overtravel Min., In.	Actuator Length In.
4775-1100	Basic plunger	75	10	.016	.047	.050	
4775-1120	Short rigid lever	75	9	.018	.052	.050	27/32
4775-1130	Long rigid lever	37	4	.037	.108	.090	1 13/32
4775-1140	Short rigid lever with roller	75	9	.018	.052	.050	25/32
4775-1150	Long rigid lever with roller	37	4	.037	.108	.090	1 11/32
4775-1160	Simulated roller	37	5	.033	.096	.090	1 9/32


## LIGHTED ROCKER SWITCHES WITH SNAP-ON COLOR CAPS




COLORED CAP



TWO LENS



ONE LENS



SOLID ROCKER

Choice of illuminated, angled or curved rocker, one or two lamps. Lenses available in red, amber, green, blue or clear. Black plastic snap-on bezels. Single or double pole circuitry, 1/4" spade terminals standard; .187" wide spade, PCB, solder or screw terminals available. Switches include 115

VAC neon lamps; 6-28 V incandescent lamps available. Contacts rated 15 amps at 277 VAC, 3/4 hp at 125-277 VAC; also available with 6 amps at 125 VAC; 3 amps at 277 VAC, 1/4 hp at 125-277 VAC ratings. Black bezel and housing standard. UL Recognized; CSA approved. Packaged 10/ctn.

Mfr. No.*	Circuit Arrangement			Poles	Lights
	A	B	C		
<b>SINGLE POLE — WHITE ROCKER, RED LENS</b>					
0851-1301	On	.....	Off	SPST	1
0851-2302	On	Off	On	SPDT	2
0851-2303	On	.....	On	SPDT	2
0851-1304	(On)	.....	Off	SPST	1
0851-2305	(On)	Off	(On)	SPDT	2
0851-2306	(On)	Off	On	SPDT	2
0851-1307	On	.....	(Off)	SPST	1
<b>DOUBLE POLE — WHITE ROCKER, RED LENS</b>					
0861-1301	On	.....	Off	DPST	1
0861-2302	On	Off	On	DPDT	2
0861-2303	On	.....	On	DPDT	2
0861-1304	(On)	.....	Off	DPST	1
0861-2305	(On)	Off	(On)	DPDT	2
0861-2306	(On)	Off	On	DPDT	2
0861-2308	(On)	.....	On	DPDT	2

Mfr. No.*	Circuit Arrangement			Poles	Lights
	A	B	C		
<b>SINGLE POLE — NO CAP</b>					
0871-1601	On	.....	Off	SPST	1
0871-2602	On	Off	On	SPDT	2
0871-2603	On	.....	On	SPDT	2
0871-1604	(On)	.....	Off	SPST	1
0871-2605	(On)	Off	(On)	SPDT	2
0871-2606	(On)	Off	On	SPDT	2
0871-1607	On	.....	(Off)	SPST	1
<b>DOUBLE POLE — NO CAP</b>					
0881-1601	On	.....	Off	DPST	1
0881-2602	On	Off	On	DPDT	2
0881-2603	On	.....	On	DPDT	2
0881-1604	(On)	.....	Off	DPST	1
0881-2605	(On)	Off	(On)	DPDT	2
0881-2606	(On)	Off	On	DPDT	2
0881-1607	(On)	.....	(Off)	DPST	1
0881-2608	(On)	.....	On	DPDT	2

( ) — Momentary action. \*To order switch with solid, curved rocker, substitute "00" for 5th and 6th digits in part number, i.e., 0851-1301 to 0851-0001.

( ) — Momentary action.

\*\*To order switches with colored caps installed, change 6th digit in the Basic Part Number to indicate cap color as follows: 0 — White, 1 — Clear, 2 — Amber, 3 — Red, 4 — Green, 5 — Blue, 6 — No Cap, 7 — Chrome. (Example: 0871-X3XX indicates Red rocker cap). Change the 7th digit in the Basic Part Number to indicate rocker cap style, as follows: 0 — Full Serrated, 1 — Half-Cap Serrated, 2 — Clear Satin Cap, 3 — Opaque Satin Cap. (Example: 0871-XX1X indicates half-cap serrated rocker).