


## Enclosed Switches Compact


*E6/V6 Series*

### TYPICAL DIMENSIONS (For reference only)

#### Roller Lever

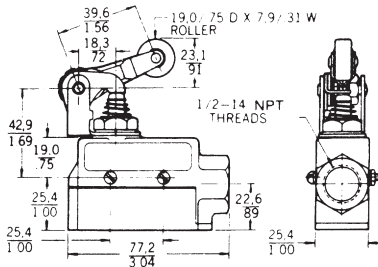

#### One-way Roller Lever

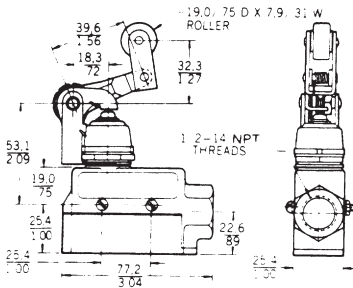

### ROLLER LEVER ACTUATED SWITCHES ORDER GUIDE

Description	Electrical Data and UL Code	Mtg.	Catalog Listing	O.F. N oz.	P.T. max. mm in.	O.T. min. mm in.	D.T. max. mm in.
With seal boot. Field adjustable 360° horizontally and 225° vertically.	SPDT 15A L74	Side	<b>BZE6-2RN2</b>	2,78-5,57 10-20	4,78 .188	5,56 .219	0,15 .006
		Flange	<b>BZV6-2RN2</b>				
Without seal boot. Adjustable as above, except horizontal adjustment in 45° increments.	DPDT 10A L59	Side	<b>DTE6-2RN2</b>	2,78-8,35 10-30	6,76 .266	5,56 .219	4,19 .165
		Flange	<b>BZE6-2RQ2</b>	2,78-5,01 10-18	4,78 .188	5,56 2.19	0,15 .006

### ONE-WAY ROLLER LEVER ACTUATED SWITCHES ORDER GUIDE

Description	Electrical Data and UL Code	Mtg.	Catalog Listing	O.F. N oz.	P.T. max. mm in.	O.T. min. mm in.	D.T. max. mm in.
With seal boot. Field adjustable 360° horizontally and 180° vertically. SPDT.	15A L74	Side	<b>BZE6-2RN28</b>	2,22-5,57 8-20	5,95 .234	5,56 .219	0,15 .006

### COIL SPRING WOBBLE LEVER ACTUATED SWITCHES ORDER GUIDE

Description	Electrical Data and UL Code	Mtg.	Catalog Listing	O.F. max. N oz.	P.T. max.
With seal boot. Operators from any direction, except pull. SPDT.	15A L74	Side	<b>BZE6-2RN18</b>	1,95	15°
		Flange	<b>BZV6-2RN18</b>	7	

### MAINTAINED CONTACT (RESET) SWITCHES STRAIGHT PLUNGER ACTUATED ORDER GUIDE

Description	Electrical Data and UL Code	Mtg.	Catalog Listing	O.P. mm in.	O.F. N oz.	P.T. max. mm in.	O.T. min. mm in.	Reset O.F. min. N* oz.
With seal boot. SPDT.	15A L67	Side	<b>BZE6-RNX1</b>	43,66±0,76 1.718±.030	1,66-5,57 6-20	1,98 .078	4,75 .187	1,66 6
		Flange	<b>BZV6-RNX1</b>	69,1±1,53 2.720±.060				