


HB SERIES PC BOARD MOUNT FUSEHOLDERS

HORIZONTAL AND VERTICAL MOUNTED

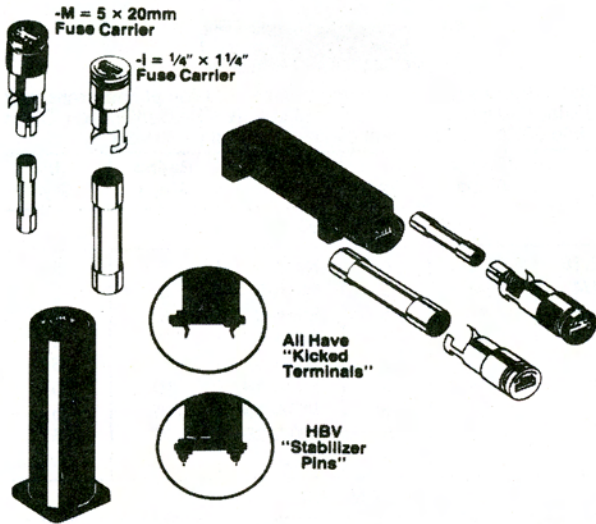

High dielectric molded phenolic body and caps that meet UL94V-0 Flammability Test. Tin plated brass, spring loaded, screwdriver slotted, bayonet type knob and fuse carrier. All series have "Kicked" terminals for stability. HBV series have stabilizer pins for increased stability. Operating Temperature: -40°C to +85°C. Electrical Ratings: **UL**—16A at 250V; **CSA**—12A at 250V; **VDE**—10A at 250V; **SEMKO**—10A at 250V. Insulation resistance: 10,000 megohms at 500 VDC. Contact Resistance: Less than 0.005 ohms at 20mV. Dielectric Strength: Over 200V/mil. UL Recognized, Guide IZLT2, File E14853. CSA Certified, Class 6225-01, File 47235. VDE Approved, 41421. SEMKO Approved, 9308147 (HBH, HBV), 9222106 (HBW). Packaged 10/ctn.

Mfr. No.	Description
Designed for 1/4" Long x 1/4" Dia. Fuses	
HBH-I HBV-I HBW-I	Horizontal Mount Vertical Mount w/Stability Pins Vertical Mount w/o Stability Pins
Designed for 20mm Long x 5mm Dia. Fuses	
HBH-M HBV-M HBW-M	Horizontal Mount Vertical Mount w/Stability Pins Vertical Mount w/o Stability Pins

PANEL MOUNT FUSEHOLDERS

HPF SERIES STANDARD FUSEHOLDERS WITH SCREW-TYPE KNOB




Designed for use with 1/32" dia. x 1 1/16" to 1 1/2" long fuses. UL Recognized, Guide IZLT2, File E14853. CSA Certified, Class 6225-01, File 47235. UL 94V0 Flammability Rating. 10/ctn.

Mfr. No.	Rating		Description
	Amps	Volts	
HPF	30	600	1 1/2" Fuses
HPF-C	15	250	1 1/2" Fuses, Clear Knob
HPF-EE	15	480	SC 0-15, 1 3/32" x 1 1/16" Fuses
HPF-FF*	30	300	SC 25, SC 30, 1 3/32" x 1 5/8" Fuses
HPF-JJ	20	480	SC 20, 1 3/32" x 1 13/32" Fuses
HPF-L	5	600	BBS, 1 3/32" x 1 3/8" Fuses
HPF-RR	30	600	KTK-R, LP-CC, FNQ-R Class CC Fuses
HPF-WT	30	600	Splash-Proof Knob

*Not CSA Certified.

PANEL MOUNT FUSEHOLDERS

HK SERIES LAMP INDICATING FUSEHOLDERS

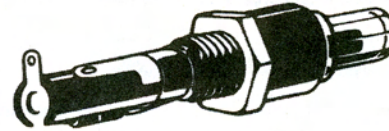

Designed for use with 1/4" long x 1/4" dia. fuses. Voltage Rating: 250V. 10/ctn.

Mfr. No.	Rating Amps	Lamp Volts	Lens Color	Type
Neon Lamps				
HKL*	15	90-250	Clear	Octagon
HKL-X*	15	90-250	Clear	Flat Side
Incandescent Lamps				
HKR	20	22-30	Amber	Octagon
HKT	20	13-22	Amber	Octagon
HKU	20	4-6	Red	Octagon
HKX	20	22-33	Amber	Flat Side

*UL Recognized, Guide IZLT2, File E14853. CSA Certified, Class 6225-01, File 47235.

HKP SERIES FUSEHOLDERS




Designed for 1/4" x 1/4" fuses. Bayonet-type knob, vibration resistant for panels up to 3/16" thick. Rating: 30A at 250V. UL Recognized, Guide IZLT2, File E14853. CSA Certified, Class 6225-01, File 47235. 10/ctn.

Mfr. No.	Description
HKP	Standard Fuseholder
HKP-L	HPK with 2250V Stand-Off Barrier
HKP-W	HPK with Drip-Proof Knob
HKP-HH	HPK with 1/4" quick connect
HKP-OO	HPK with snap-lock

Note: See HTB Series for enhanced functionality and economy.

IN-LINE FUSEHOLDERS

HFB SERIES WATERPROOF FUSEHOLDERS

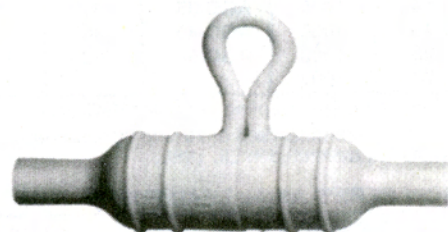

High visibility yellow one-piece molded thermoplastic rubber body designed for 1/4" Long x 1/4" Dia. fuses. Albaloy plated copper contacts. Accepts 12 to 18 AWG wire leads (not provided). Operating Temperature: -40°C to +150°C. Withstands many organic solvents, shock and vibrations. Voltage Rating: 30A at 32V. Information molded into body. Dimensions: 3" Long x 0.75" Dia. Packaged 10/ctn.

Mfr. No.	Description
HFB	Standard Pack (10-in.)

HBB SERIES UNIVERSAL IN-LINE FUSEHOLDERS



Designed for 7/8", 1", 1 1/4" Long x 1/4" Dia. fuses. Nylon body meets UL 94V-0 Flammability Tests. Albaloy plated copper contacts. Accepts 12 to 18 AWG wire leads (not supplied). Fuseholder housing with fuse installed requires minimum of 5 lbs. force to separate. Voltage Rating: 30A at 32V. Packaged 10/ctn.

Mfr. No.	Description
HBB	Standard Pack (10-in.)