

Common features

- Space saving 6.2 mm wide
- Connections for 16-way jumper link
- Integral coil indication and protection circuit
- Secure retention and easy ejection by plastic clip
- Dual screw head (blade+cross) terminals and Push-in terminals versions
- 35 mm rail mounting (EN 60715)

EMR
Electromechanical Relays


- 1 CO 6 A 250 V AC
- High switching capability

SSR
Solid State Relays

- 1 solid state output (options 0.1 A 48 V DC, 2 A 24 V DC, 2 A 240 V AC)
- Silent, high speed switching, long electrical life

MasterBASIC

- For general use in any type of system
- **EMR: 6 to 24 and 125 V AC/DC, 230 V AC supply**
- **SSR: 6 to 24 V DC, 125 V AC/DC, 230 V AC supply**
- Screw terminal and Push-in terminal

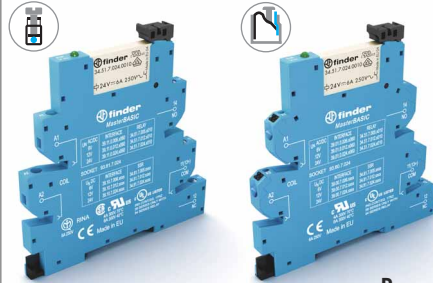39.11/39.01


Page 4

39.10/39.00


Page 5

MasterPLUS

- Accepts the output fuse module, for the easy and space efficient protection of output circuits
- **EMR: 6 to 125 V AC/DC, 125 and 220 V DC, 230 V AC supply**
- **SSR: 24 - 125 V AC/DC, 6 to 220 V DC and 230 V AC supply**
- **Special 125 V AC/DC and 230 V AC leakage current suppression types (39.31.3, 39.61.3 EMR and 39.30.3, 39.60.3 SSR)**
- Screw terminal and Push-in terminal

39.31 - 39.31.3/39.61 - 39.61.3


Page 6

39.30 - 39.30.3/39.60 - 39.60.3


Page 7

MasterINPUT

- Jumper link option for the quick and easy distribution of supply voltage to proximity switches and similar input devices
- **EMR: 6 to 24 V and 125 V AC/DC, 230 V AC supply**
- **SSR: 6 - 24 V DC, 24 - 125 V AC/DC, 230 V AC supply**
- Screw terminal and Push-in terminal

39.41/39.71


Page 8

39.40/39.70


Page 9

MasterOUTPUT

- Jumper link option for the quick and easy distribution of supply voltage to output side and its connection to electromagnetic valves and similar output devices
- **EMR: 6 to 24 V and 125 V AC/DC, 230 V AC supply**
- **SSR: 6 to 24 V DC, 125 V AC/DC, 230 V AC supply**
- Screw terminal and Push-in terminal

39.21/39.51



Page 10

39.20/39.50


Page 11

MasterTIMER

- Timer adjustment via top mounted rotary knob accessible after assembly
- Control signal terminal
- DIP-switch for selection of 4 time scales and 8 functions
- Output with fuse module option
- **EMR and SSR: 12 to 24 V AC/DC supply**
- Screw terminal and Push-in terminal

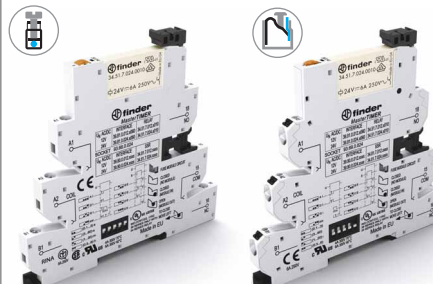39.81/ 39.91


Page 12

39.80/39.90


Page 13

MasterBASIC

39.11 - 39.10 - 39.01 - 39.00

- For general interface use in any type of system and application.
- Can be used for input interface applications between auxiliary contacts, sensors etc. and controllers, PLCs' or motors. Or for output interface between PLC's controllers and relays, solenoids etc.


MasterPLUS

39.31 - 39.30 - 39.31.3 - 39.30.3 - 39.61 - 39.60 - 39.61.3 - 39.60.3


- This special version provides extra protection for the output circuit thanks to the replaceable fuse module.
- For general interface use in any type of system and application.
- Can be used for input interface applications between auxiliary contacts, sensors etc. and controllers, PLCs' or motors. Or for output interface between PLC's controllers and relays, solenoids etc.

Relay interface modules

Output devices


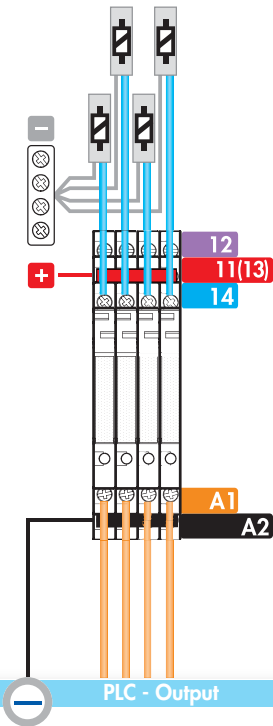


Output devices

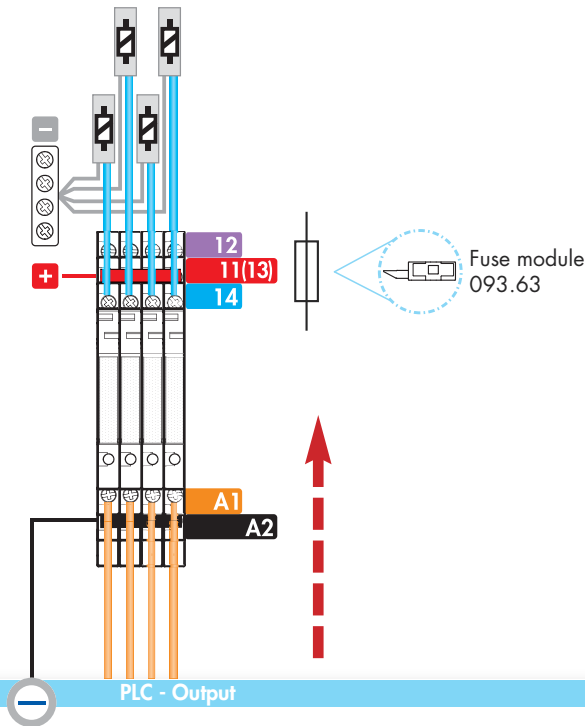



PLC - Output

PLC - Output



PLC - Input

PLC - Input

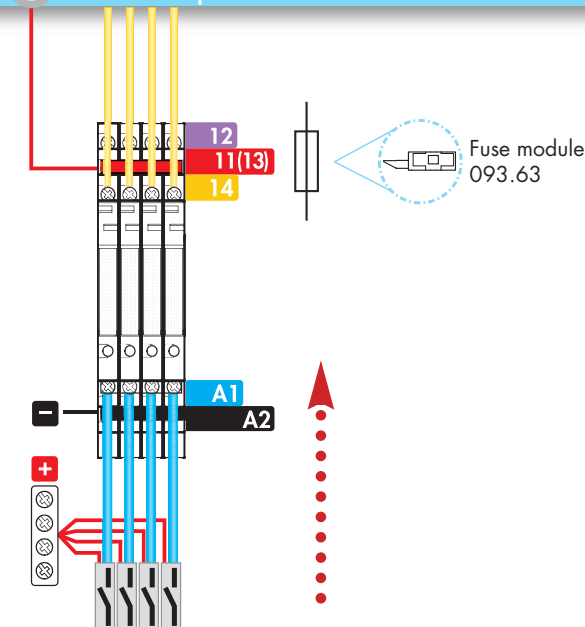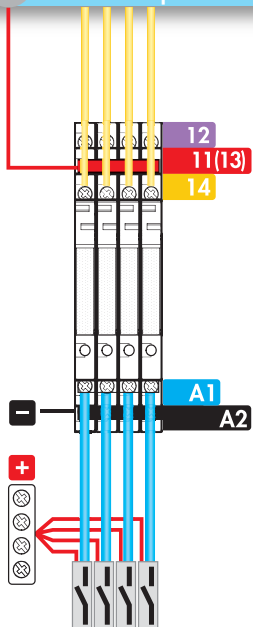

Input devices

Input devices

MasterINPUT

39.41 - 39.40 - 39.71 - 39.70

- These models allow the full termination of input device to the interface without the need for additional terminals - saving component cost, time and panel space.
- Quick and easy distribution of supply voltage through the jumper link on the Bus-Bar (BB) connection.
- Ideal for interface applications between the auxiliary contacts, sensors, limit switches and Controllers or PLC's.

MasterOUTPUT


39.21 - 39.20 - 39.51 - 39.50

- These models allow the full termination of output device to the interface without the need for additional terminals - saving component cost, time and panel space.
- Quick and easy distribution of supply voltage through the jumper link on the Bus-Bar (BB) connection.
- Ideal for interface applications between the PLC's or Controllers and output devices such as electromagnetic valves or motors etc..

MasterTIMER

39.81 - 39.80 - 39.91 - 39.90

- Slim and Multifunction Timed Interface modules.

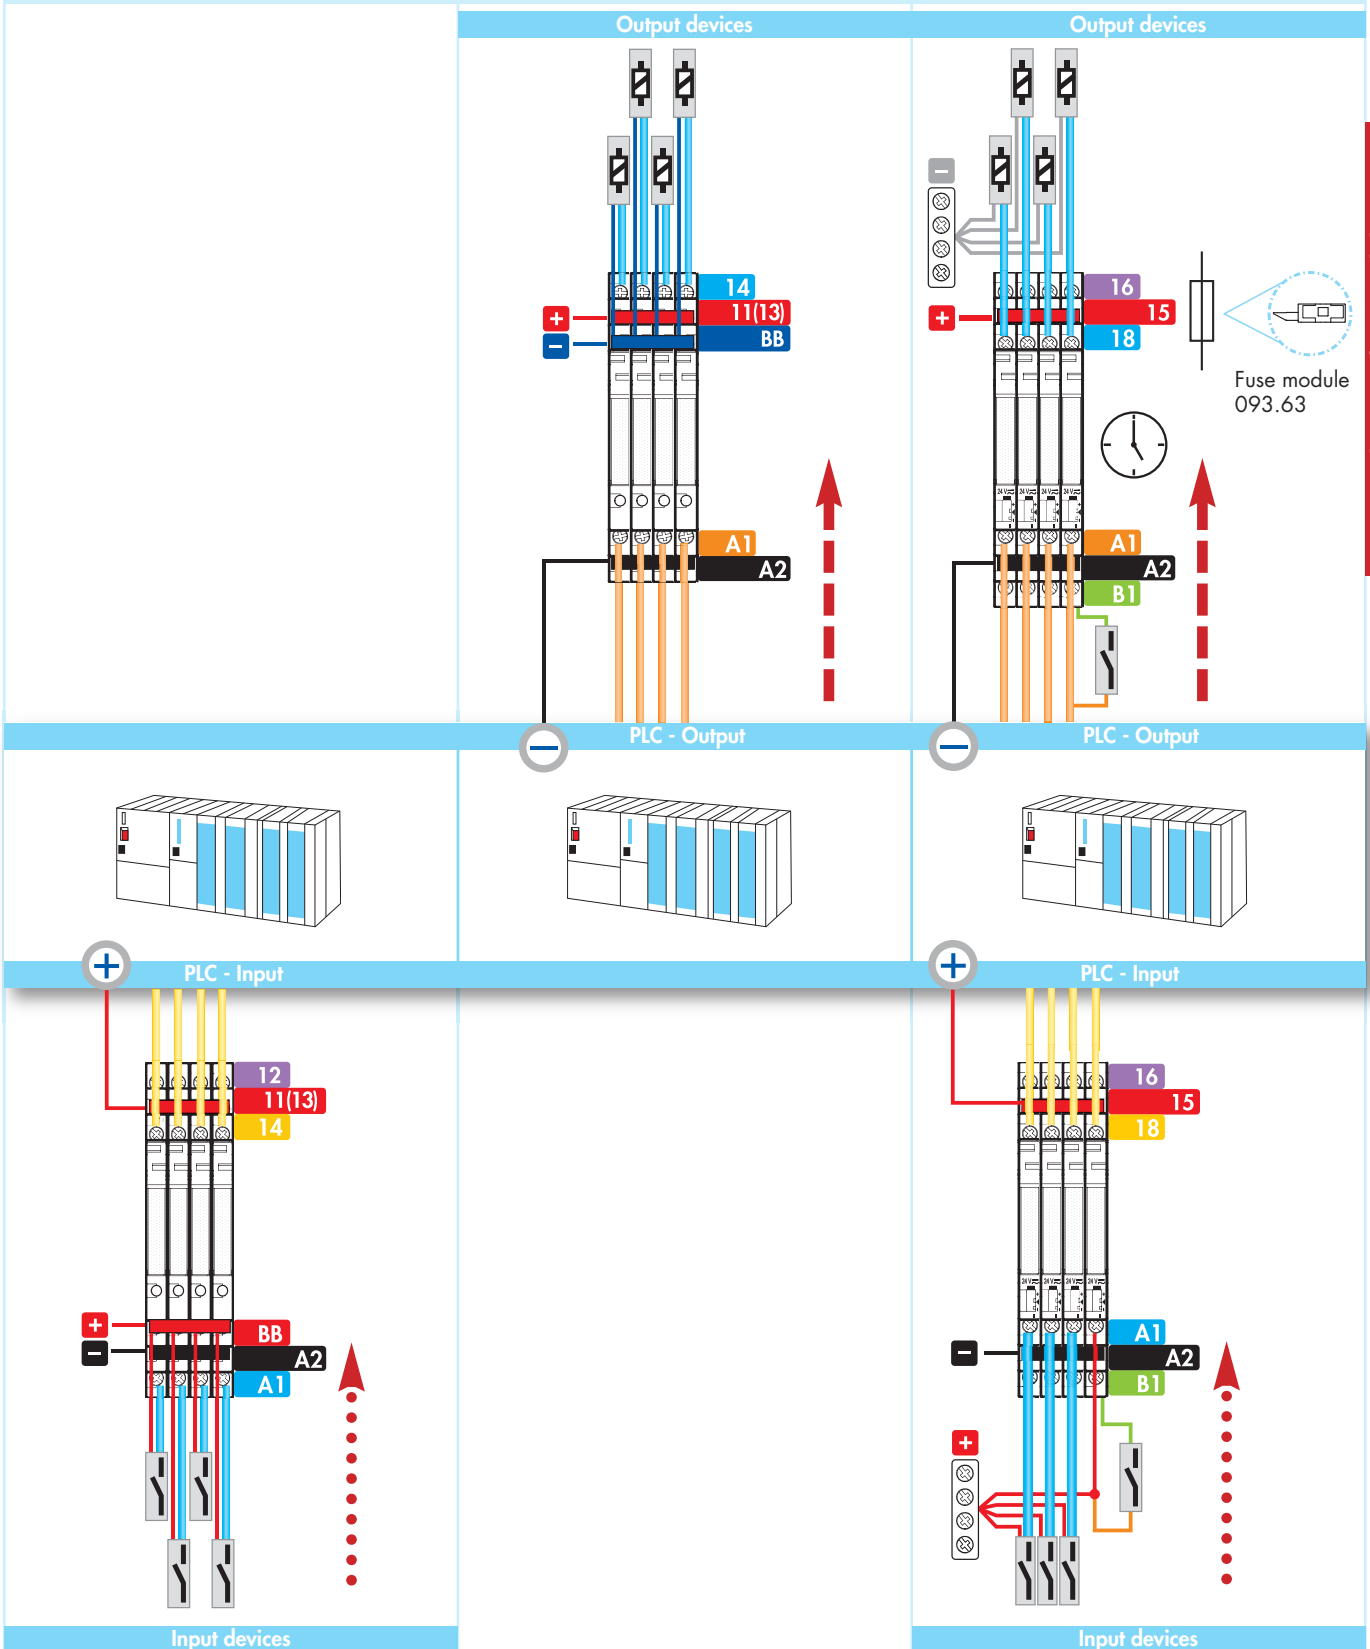

MasterBASIC - EMR

Features

1 Pole interface module, 6.2 mm wide, ideal for PLC and electronic systems

- Common connection possible with optional jumper links (terminals A1, A2 and 11)
- UL Listing (certain relay/socket combinations)




- 6 A electromechanical relay
- 6 to 24 and 125 V AC/DC and 230 V AC supply
- Screw terminal and push-in terminal
- 35 mm rail [EN 60715] mounting

39.11
Screw terminal

39.01
Push-in terminal



Relay interface modules

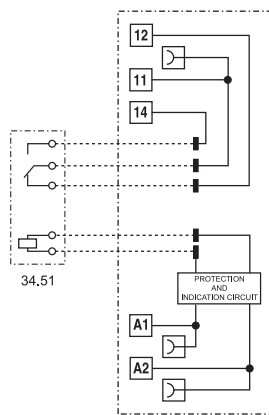

93.60 / 93.61

For outline drawing see page 20, 21

| Contact specification | | |
|--|-----------------|---------------------------|
| Contact configuration | | 1 CO (SPDT) |
| Rated current/Maximum peak current | A | 6/10 |
| Rated voltage/Maximum switching voltage | V AC | 250/400 |
| Rated load AC1 | VA | 1,500 |
| Rated load AC15 (230 V AC) | VA | 300 |
| Single phase motor rating (230 V AC) | kW | 0.185 |
| Breaking capacity DC1: 30/110/220 V | A | 6/0.2/0.12 |
| Minimum switching load | mW (V/mA) | 500 (12/10) |
| Standard contact material | | AgNi |
| Supply specification | | |
| Nominal voltage (U _N) | V AC/DC | 6 - 12 - 24 - 110...125 |
| | V AC (50/60 Hz) | 220...240 |
| Rated power | VA (50 Hz)/W | See page 16 |
| Operating range | | (0.8...1.1)U _N |
| Holding voltage | | 0.6 U _N |
| Must drop-out voltage | | 0.1 U _N |
| Technical data | | |
| Mechanical life AC/DC | cycles | 10 · 10 ⁶ |
| Electrical life at rated load AC1 | cycles | 60 · 10 ³ |
| Operate/release time | ms | 5/6 |
| Insulation between coil and contacts (1.2/50 μs) | kV | 6 (8 mm) |
| Dielectric strength between open contacts | V AC | 1,000 |
| Ambient temperature range | °C | -40...+70 |
| Protection category | | IP 20 |
| Approvals relay (according to type) | | |


MasterBASIC - SSR

Features

1 Pole interface module, 6.2 mm wide, ideal for PLC and electronic systems

- Common connection possible with optional jumper links (terminals A1, A2 and 13+)
- UL Listing (certain relay/socket combinations)

NEW 39.10/39.00

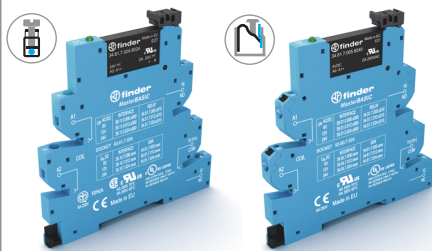


- 0.1 or 2 A solid state relay
- 6 to 24 V DC, 125 V AC/DC and 230 V AC supply
- Screw terminal and push-in terminal
- 35 mm rail (EN 60715) mounting

39.10
Screw terminal



39.00
Push-in terminal

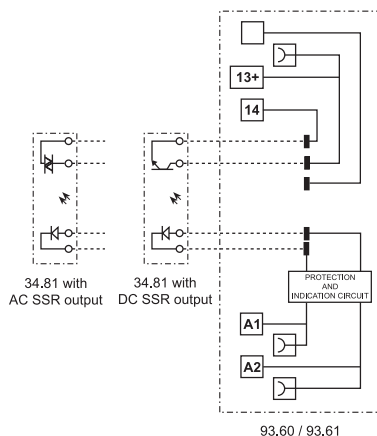

For outline drawing see page 20, 21

| Output specification (SSR) | | 39.x0.x.xxx.9024 | 39.x0.x.xxx.7048 | 39.x0.x.xxx.8240 |
|--|-----------------|----------------------------|------------------|------------------|
| Contact configuration | | 1 NO (SPST-NO) | | |
| Rated current/Maximum peak current (10 ms) | A | 2/20 DC | 0.1/0.5 DC | 2/40 AC |
| Rated voltage/Maximum blocking voltage | V | 24/33 DC | 48/60 DC | 240/— AC |
| Switching voltage range | V | (1.5...24) DC | (1.5...48) DC | (12...275) AC |
| Repetitive peak off-state voltage | V _{pk} | — | — | 600 |
| Minimum switching current | mA | 1 | 0.05 | 22 |
| Max. "OFF-state" leakage current | mA | 0.001 | 0.001 | 1.5 |
| Max. "ON-state" voltage drop | V | 0.12 | 1 | 1.6 |
| Supply specification | | | | |
| Nominal voltage (U _N) | V AC/DC | 110...125 | | |
| | V AC (50/60 Hz) | 220...240 | | |
| | V DC | 6 - 12 - 24 | | |
| Rated power | VA (50 Hz)/W | See page 17 | | |
| Operating range | | (0.8...1.1) U _N | | |
| Must drop-out voltage | | 0.1 U _N | | |
| Technical data | | | | |
| Operate/release time | ms | 0.2/0.6 | 0.04/0.11 | 12/12 |
| Dielectric strength between input/output | V AC | 2,500 | | |
| Ambient temperature range | °C | -20...+55 | | |
| Protection category | | IP20 | | |
| Approvals relay (according to type) | | | | |

MasterPLUS - EMR

Features

1 Pole interface modules, 6.2 mm wide, ideal for PLC and electronic systems

- Accepts output fuse module **093.63** (for 5 x 20 mm fuses) for quick and easy load protection, see page 24
- Common connection possible with optional jumper links (terminals A1, A2 and 11)
- UL Listing (certain relay/socket combinations)



- 6 A electromechanical relay
- 6 to 125 V AC/DC, 125 and 220 V DC, 230 V AC supply
- Screw terminal and push-in terminal
- 35 mm rail [EN 60715] mounting




- 6 A electromechanical relay
- Leakage current suppression version, 125 V AC/DC and 230 V AC supply
- Screw terminal and push-in terminal

39.31 / 39.31.3
Screw terminal

39.61 / 39.61.3
Push-in terminal



Relay interface modules

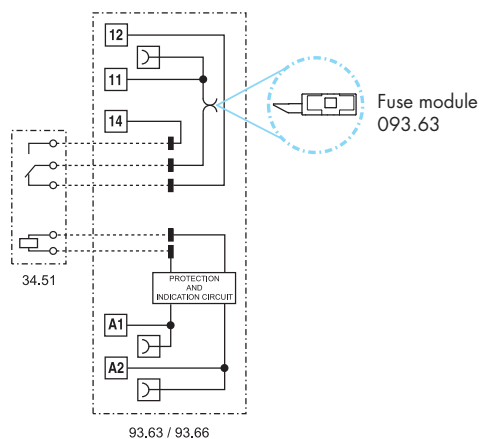

For outline drawing see page 20, 21

| Contact specification | | | |
|--|-----------------|------------------------------|----------------------------|
| Contact configuration | | 1 CO (SPDT) | 1 CO (SPDT) |
| Rated current/Maximum peak current | A | 6/10 | 6/10 |
| Rated voltage/Maximum switching voltage | V AC | 250/400 | 250/400 |
| Rated load AC1 | VA | 1,500 | 1,500 |
| Rated load AC15 (230 V AC) | VA | 300 | 300 |
| Single phase motor rating (230 V AC) | kW | 0.185 | 0.185 |
| Breaking capacity DC1: 30/110/220 V | A | 6/0.2/0.12 | 6/0.2/0.12 |
| Minimum switching load | mW (V/mA) | 500 (12/10) | 500 (12/10) |
| Standard contact material | | AgNi | AgNi |
| Supply specification | | | |
| Nominal voltage (U _N) | V AC/DC | 6 - 12 - 24 - 60 - 110...125 | 110...125 |
| | V AC (50/60 Hz) | 220...240 | 220...240 |
| | V DC | 110...125 - 220 | — |
| Rated power | VA (50 Hz)/W | See page 16 | See page 16 |
| Operating range | | (0.8...1.1) U _N | (0.8...1.1) U _N |
| Holding voltage | | 0.6 U _N | 0.6 U _N |
| Must drop-out voltage | | 0.1 U _N | 0.3 U _N |
| Technical data | | | |
| Mechanical life AC/DC | cycles | 10 · 10 ⁶ | 10 · 10 ⁶ |
| Electrical life at rated load AC1 | cycles | 60 · 10 ³ | 60 · 10 ³ |
| Operate/release time | ms | 5/6 | 5/6 |
| Insulation between coil and contacts (1.2/50 μs) | kV | 6 (8 mm) | 6 (8 mm) |
| Dielectric strength between open contacts | V AC | 1,000 | 1,000 |
| Ambient temperature range | °C | -40...+70 (+55 for 220 V DC) | -40...+70 |
| Protection category | | IP20 | IP20 |

Approvals relay (according to type)



MasterPLUS - SSR

Features

1 Pole interface modules, 6.2 mm wide, ideal for PLC and electronic systems

- Accepts output fuse module **093.63** (for 5 x 20 mm fuses) for quick and easy load protection, see page 24
- Common connection possible with optional jumper links (terminals A1, A2 and 13+)
- UL Listing (certain relay/socket combinations)




- 0.1 or 2 A solid state relay
- 24 - 125 V AC/DC, 6 to 220 V DC and 230 V AC supply
- Screw terminal and push-in terminal
- 35 mm rail (EN 60715) mounting

- 0.1 or 2 A solid state relay
- Leakage current suppression version, 125 V AC/DC and 230 V AC supply
- Screw terminal and push-in terminal

39.30 / 39.30.3
Screw terminal

39.60 / 39.60.3
Push-in terminal

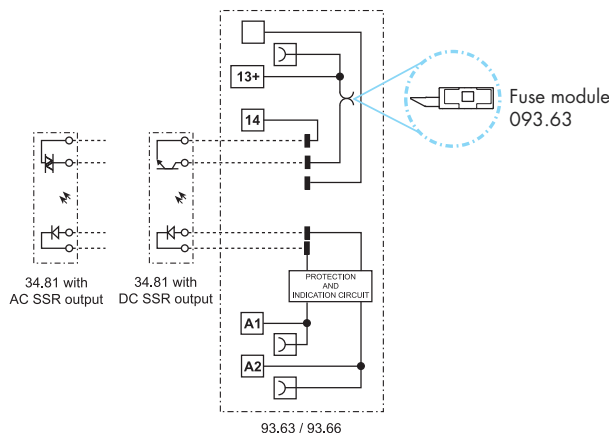

For outline drawing see page 20, 21

| Output specification (SSR) | | 39.x0.x.xxx.9024 | 39.x0.x.xxx.7048 | 39.x0.x.xxx.8240 | 39.x0.3.xxx.9024 | 39.x0.3.xxx.7048 | 39.x0.3.xxx.8240 |
|--|-----------------|------------------------------------|------------------|------------------|----------------------------|------------------|------------------|
| Contact configuration | | 1 NO (SPST-NO) | | | 1 NO (SPST-NO) | | |
| Rated current/Maximum peak current (10 ms) | A | 2/20 DC | 0.1/0.5 DC | 2/40 AC | 2/20 DC | 0.1/0.5 DC | 2/40 AC |
| Rated voltage/Maximum blocking voltage | V | 24/33 DC | 48/60 DC | 240/— AC | 24/33 DC | 48/60 DC | 240/— AC |
| Switching voltage range | V | (1.5...24) DC | (1.5...48)DC | (12...275) AC | (1.5...24) DC | (1.5...48)DC | (12...275) AC |
| Repetitive peak off-state voltage | V _{pk} | — | — | 600 | — | — | 600 |
| Minimum switching current | mA | 1 | 0.05 | 22 | 1 | 0.05 | 22 |
| Max. "OFF-state" leakage current | mA | 0.001 | 0.001 | 1.5 | 0.001 | 0.001 | 1.5 |
| Max. "ON-state" voltage drop | V | 0.12 | 1 | 1.6 | 0.12 | 1 | 1.6 |
| Supply specification | | | | | | | |
| Nominal voltage (U _N) | V AC/DC | 24 - 110...125 | | | 110...125 | | |
| | V AC (50/60 Hz) | 220...240 | | | 220...240 | | |
| | V DC | 6 - 12 - 24 - 60 - 110...125 - 220 | | | — | | |
| Rated power | VA (50 Hz)/W | See page 17 | | | See page 17 | | |
| Operating range | | (0.8...1.1) U _N | | | (0.8...1.1) U _N | | |
| Must drop-out voltage | | 0.1 U _N | | | 0.3 U _N | | |
| Technical data | | | | | | | |
| Operate/release time | ms | 0.2/0.6 | 0.04/0.11 | 12/12 | 0.2/0.6 | 0.04/0.11 | 12/12 |
| Dielectric strength between input/output | V AC | 2,500 | | | 2,500 | | |
| Ambient temperature range | °C | -20...+55 | | | -20...+55 | | |
| Protection category | | IP20 | | | IP20 | | |
| Approvals relay (according to type) | | | | | | | |

MasterINPUT - EMR

Features

1 Pole interface module, 6.2 mm wide, ideal for PLC and electronic systems

- Jumper link option for the quick and easy distribution of supply voltage to proximity switches and similar input devices (Bus-bar connection BB)
- Gold plated output contact as standard, for better compatibility with low energy PLC inputs
- UL Listing (certain relay/socket combinations)




- 6 A electromechanical relay
- 6 - 12 - 24 - 125 V AC/DC and 230 V AC supply
- Screw terminal and push-in terminal
- 35 mm rail [EN 60715] mounting

39.41
Screw terminal

39.71
Push-in terminal



Relay interface modules

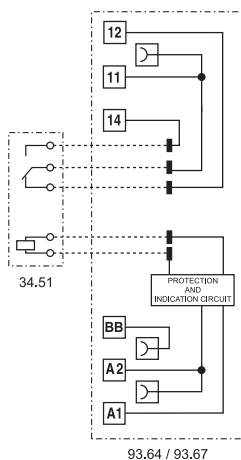

93.64 / 93.67

For outline drawing see page 20, 21

| Contact specification | | |
|--|-----------------|----------------------------|
| Contact configuration | | 1 CO (SPDT) |
| Rated current/Maximum peak current | A | 6/10 |
| Rated voltage/Maximum switching voltage | V AC | 250/400 |
| Rated load AC1 | VA | 1,500 |
| Rated load AC15 (230 V AC) | VA | 300 |
| Single phase motor rating (230 V AC) | kW | 0.185 |
| Breaking capacity DC1: 30/110/220 V | A | 6/0.2/0.12 |
| Minimum switching load | mW (V/mA) | 50 (5/2) |
| Standard contact material | | AgNi + Au |
| Supply specification | | |
| Nominal voltage (U _N) | V AC/DC | 6 - 12 - 24 - 110...125 |
| | V AC (50/60 Hz) | 220...240 |
| Rated power | VA (50 Hz)/W | See page 16 |
| Operating range | | (0.8...1.1) U _N |
| Holding voltage | | 0.6 U _N |
| Must drop-out voltage | | 0.1 U _N |
| Technical data | | |
| Mechanical life AC/DC | cycles | 10 · 10 ⁶ |
| Electrical life at rated load AC1 | cycles | 60 · 10 ³ |
| Operate/release time | ms | 5/6 |
| Insulation between coil and contacts (1.2/50 μs) | kV | 6 (8 mm) |
| Dielectric strength between open contacts | V AC | 1,000 |
| Ambient temperature range | °C | -40...+70 |
| Protection category | | IP20 |
| Approvals relay (according to type) | | |

MasterINPUT - SSR

Features

1 Pole interface modules, 6.2 mm wide, ideal for PLC and electronic systems

- Jumper link option for the quick and easy distribution of supply voltage to proximity switches and similar input devices (Bus-bar connection BB)
- UL Listing (certain relay/socket combinations)




- 0.1 or 2 A solid state relay
- 6 - 12 - 24 V DC, 24 - 125 V AC/DC and 230 V AC supply
- Screw terminal and push-in terminal
- 35 mm rail (EN 60715) mounting

39.40
Screw terminal



39.70
Push-in terminal

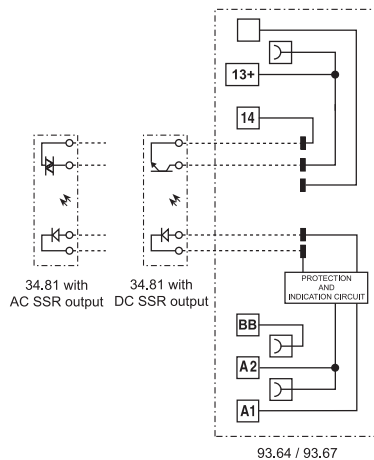

For outline drawing see page 20, 21

| Output specification (SSR) | | 39.x0.x.xxx.9024 | 39.x0.x.xxx.7048 | 39.x0.x.xxx.8240 |
|--|-----------------|----------------------------|------------------|------------------|
| Contact configuration | | 1 NO (SPST-NO) | | |
| Rated current/Maximum peak current (10 ms) | A | 2/20 DC | 0.1/0.5 DC | 2/40 AC |
| Rated voltage/Maximum blocking voltage | V | 24/33 DC | 48/60 DC | 240/— AC |
| Switching voltage range | V | (1.5...24) DC | (1.5...48) DC | (12...275) AC |
| Repetitive peak off-state voltage | V _{pk} | — | — | 600 |
| Minimum switching current | mA | 1 | 0.05 | 22 |
| Max. "OFF-state" leakage current | mA | 0.001 | 0.001 | 1.5 |
| Max. "ON-state" voltage drop | V | 0.12 | 1 | 1.6 |
| Supply specification | | | | |
| Nominal voltage (U _N) | V AC/DC | 24 - 110...125 | | |
| | V AC (50/60 Hz) | 220...240 | | |
| | V DC | 6 - 12 - 24 | | |
| Rated power | VA (50 Hz)/W | See page 17 | | |
| Operating range | | (0.8...1.1) U _N | | |
| Must drop-out voltage | | 0.1 U _N | | |
| Technical data | | | | |
| Operate/release time | ms | 0.2/0.6 | 0.04/0.11 | 12/12 |
| Dielectric strength between input/output | V AC | 2,500 | | |
| Ambient temperature range | °C | -20...+55 | | |
| Protection category | | IP20 | | |
| Approvals relay (according to type) | | | | |

MasterOUTPUT - EMR

Features

1 Pole interface modules, 6.2 mm wide, ideal for PLC and electronic systems

- Jumper link option for the quick and easy distribution of supply voltage to output side (Bus-bar connection BB) and its connection to electromagnetic valves and similar output devices
- UL Listing (certain relay/socket combinations)




- 6 A electromechanical relay
- 6 - 12 - 24 - 125 V AC/DC and 230 V AC supply
- Screw terminal and push-in terminal
- 35 mm rail (EN 60715) mounting

39.21
Screw terminal



39.51
Push-in terminal

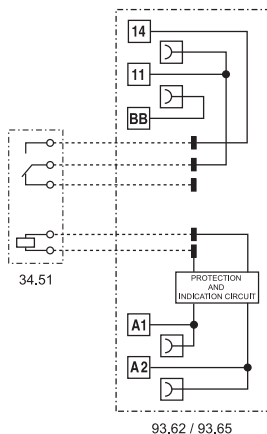

For outline drawing see page 20, 21

| Contact specification | | |
|--|-----------------|----------------------------|
| Contact configuration | | 1 NO (SPST-NO) |
| Rated current/Maximum peak current | A | 6/10 |
| Rated voltage/Maximum switching voltage | V AC | 250/400 |
| Rated load AC1 | VA | 1,500 |
| Rated load AC15 (230 V AC) | VA | 300 |
| Single phase motor rating (230 V AC) | kW | 0.185 |
| Breaking capacity DC1: 30/110/220 V | A | 6/0.2/0.12 |
| Minimum switching load | mW (V/mA) | 500 (12/10) |
| Standard contact material | | AgNi |
| Supply specification | | |
| Nominal voltage (U _N) | V AC/DC | 6 - 12 - 24 - 110...125 |
| | V AC (50/60 Hz) | 220...240 |
| Rated power | VA (50 Hz)/W | See page 16 |
| Operating range | | (0.8...1.1) U _N |
| Holding voltage | | 0.6 U _N |
| Must drop-out voltage | | 0.1 U _N |
| Technical data | | |
| Mechanical life AC/DC | cycles | 10 · 10 ⁶ |
| Electrical life at rated load AC1 | cycles | 60 · 10 ³ |
| Operate/release time | ms | 5/6 |
| Insulation between coil and contacts (1.2/50 μs) | kV | 6 (8 mm) |
| Dielectric strength between open contacts | V AC | 1,000 |
| Ambient temperature range | °C | -40...+70 |
| Protection category | | IP20 |
| Approvals relay (according to type) | | |

MasterOUTPUT - SSR

Features

1 Pole interface modules, 6.2 mm wide, ideal for PLC and electronic systems

- Jumper link option for the quick and easy distribution of supply voltage to output side (Bus-bar connection BB) and its connection to electromagnetic valves and similar output devices
- UL Listing (certain relay/socket combinations)




- 0.1 or 2 A solid state relay
- 6 to 24 V DC, 125 V AC/DC and 230 V AC supply
- Screw terminal and push-in terminal
- 35 mm rail (EN 60715) mounting

39.20
Screw terminal



39.50
Push-in terminal

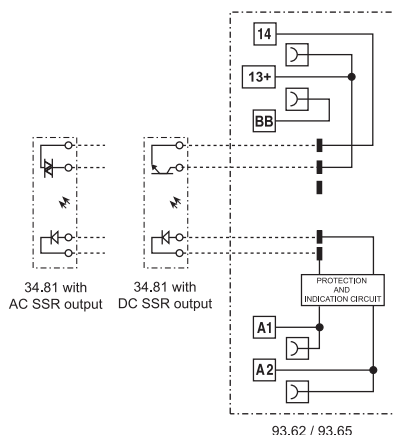

For outline drawing see page 20, 21

| Output specification (SSR) | | 39.x0.x.xxx.9024 | 39.x0.x.xxx.7048 | 39.x0.x.xxx.8240 |
|--|-----------------|----------------------------|------------------|------------------|
| Contact configuration | | 1 NO (SPST-NO) | | |
| Rated current/Maximum peak current (10 ms) | A | 2/20 DC | 0.1/0.5 DC | 2/40 AC |
| Rated voltage/Maximum blocking voltage | V | 24/33 DC | 48/60 DC | 240/— AC |
| Switching voltage range | V | (1.5...24) DC | (1.5...48) DC | (12...275) AC |
| Repetitive peak off-state voltage | V _{pk} | — | — | 600 |
| Minimum switching current | mA | 1 | 0.05 | 22 |
| Max. "OFF-state" leakage current | mA | 0.001 | 0.001 | 1.5 |
| Max. "ON-state" voltage drop | V | 0.12 | 1 | 1.6 |
| Supply specification | | | | |
| Nominal voltage (U _N) | V AC/DC | 110...125 | | |
| | V AC (50/60 Hz) | 220...240 | | |
| | V DC | 6 - 12 - 24 | | |
| Rated power | VA (50 Hz)/W | See page 17 | | |
| Operating range | | (0.8...1.1) U _N | | |
| Must drop-out voltage | | 0.1 U _N | | |
| Technical data | | | | |
| Operate/release time | ms | 0.2/0.6 | 0.04/0.11 | 12/12 |
| Dielectric strength between input/output | V AC | 2,500 | | |
| Ambient temperature range | °C | -20...+55 | | |
| Protection category | | IP20 | | |
| Approvals relay (according to type) | | | | |

MasterTIMER - EMR

Features

Slim timed interface module, 6.2 mm wide, ideal for space-saving timing solutions in panels


- Timer adjustment via top mounted rotary knob, accessible after assembly
- Control signal terminal
- DIP-switch for selection of 4 time scales and 8 functions
- Accepts output fuse module **093.63** (for 5 x 20 mm fuses) for quick and easy load protection, see page 24
- Common connection possible with optional jumper links (terminals A1, A2 and 15)
- UL Listing (certain relay/socket combinations)

39.81
Screw terminal

39.91
Push-in terminal



- 6 A electromechanical relay
- 12 - 24 V AC/DC supply
- Screw terminal and push-in terminal
- 35 mm rail (EN 60715) mounting

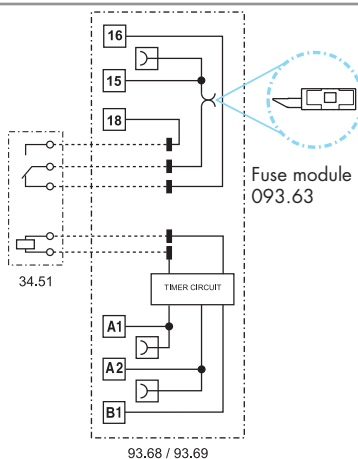

- AI: On-delay
- DI: Interval
- GI: Pulse (0.5 s) delayed
- SW: Symmetrical flasher (starting pulse on)
- BE: Off-delay with control signal
- CE: On- and off-delay with control signal
- DE: Interval with control signal on
- EE: Interval with control signal off

For outline drawing see page 20, 21

| Contact specification | | |
|---|--------------|--|
| Contact configuration | | 1 CO (SPDT) |
| Rated current/Maximum peak current | A | 6/10 |
| Rated voltage/Maximum switching voltage | V AC | 250/400 |
| Rated load AC1 | VA | 1,500 |
| Rated load AC15 (230 V AC) | VA | 300 |
| Single phase motor rating (230 V AC) | kW | 0.185 |
| Breaking capacity DC1: 30/110/220 V | A | 6/0.2/0.12 |
| Minimum switching load | mW (V/mA) | 500 (12/10) |
| Standard contact material | | AgNi |
| Supply specification | | |
| Nominal voltage (U _N) | V AC/DC | 12 - 24 |
| Rated power AC/DC | VA (50 Hz)/W | See page 16 |
| Operating range | | (0.8...1.1) U _N |
| Holding voltage | | 0.6 U _N |
| Must drop-out voltage | | 0.1 U _N |
| Technical data | | |
| Specified time range | | (0.1...3)s, (3...60)s, (1...20)min, (0.3...6)h |
| Repeatability | % | ± 1 |
| Recovery time | ms | ≤ 50 |
| Minimum control impulse | ms | 50 |
| Setting accuracy - full range | % | 5 |
| Electrical life at rated load AC1 | cycles | 60 · 10 ³ |
| Ambient temperature range | °C | -20...+50 |
| Protection category | | IP20 |
| Approvals relay (according to type) | | |

MasterTIMER - SSR

Features

Slim timed interface module, 6.2 mm wide, ideal for space-saving timing solutions in panels

- Timer adjustment via top mounted rotary knob; accessible after assembly
- Start terminal
- DIP-switch for selection of 4 time scales and 8 functions
- Accepts output fuse module **093.63** (for 5 x 20 mm fuses) for quick and easy load protection, see page 24
- Common connection possible with optional jumper links (terminals A1, A2 and 15+)
- UL Listing (certain relay/socket combinations)


39.80
Screw terminal




39.90
Push-in terminal



NEW 39.80/39.90

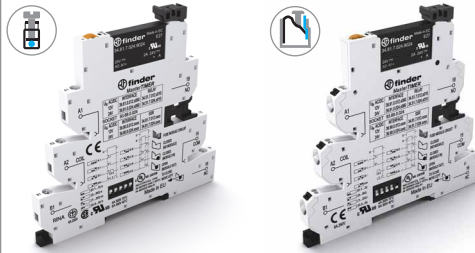

- 0.1 or 2 A solid state relay
- 12 - 24 V AC/DC supply
- Screw terminal and push-in terminal
- 35 mm rail (EN 60715) mounting

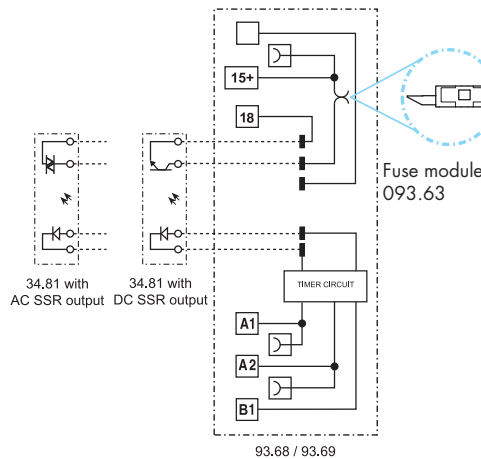


- AI:** On-delay
- DI:** Interval
- GI:** Pulse (0.5 s) delayed
- SW:** Symmetrical flasher (starting pulse on)
- BE:** Off-delay with control signal
- CE:** On- and off-delay with control signal
- DE:** Interval with control signal on
- EE:** Interval with control signal off

For outline drawing see page 20, 21

| Output specification (SSR) | 39.x0.x.xxx.9024 | 39.x0.x.xxx.7048 | 39.x0.x.xxx.8240 |
|--|-------------------|--|------------------|
| Contact configuration | 1 NO (SPST-NO) | | |
| Rated current/Maximum peak current (10 ms) | A 2/20 DC | 0.1/0.5 DC | 2/40 AC |
| Rated voltage/Maximum blocking voltage | V 24/33 DC | 48/60 DC | 240/— AC |
| Switching voltage range | V (1.5...24) DC | (1.5...48) DC | (12...275) AC |
| Repetitive peak off-state voltage | V _{pk} — | — | 600 |
| Minimum switching current | mA 1 | 0.05 | 22 |
| Max. "OFF-state" leakage current | mA 0.001 | 0.001 | 1.5 |
| Max. "ON-state" voltage drop | V 0.12 | 1 | 1.6 |
| Supply specification | | | |
| Nominal voltage (U _N) | V AC/DC | 12 - 24 | |
| Rated power | VA (50 Hz)/W | See page 17 | |
| Operating range | | (0.8...1.1) U _N | |
| Holding voltage | | 0.6 U _N | |
| Must drop-out voltage | | 0.1 U _N | |
| Technical data | | | |
| Specified time range | | (0.1...3)s, (3...60)s, (1...20)min, (0.3...6)h | |
| Repeatability | % | ± 1 | |
| Recovery time | ms | ≤ 50 | |
| Minimum control impulse | ms | 50 | |
| Setting accuracy – full range | % | 5 | |
| Ambient temperature range | °C | -20...+50 | |
| Protection category | | IP20 | |
| Approvals relay (according to type) | | CE PG cRU [®] us | |

Ordering information

Example: Master**PLUS** 39 series screw terminal interface module, electromechanical relay output, 1 CO (SPDT), 24 V AC/DC coil.

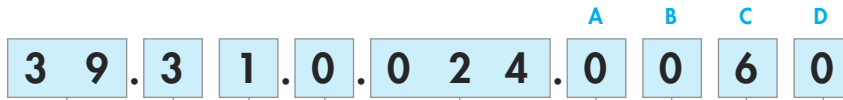

Series

Type

- 1 = *MasterBASIC*, screw terminal
- 0 = *MasterBASIC*, push-in terminal
- 3 = *MasterPLUS*, screw terminal, fuse-protectable output
- 6 = *MasterPLUS*, push-in terminal, fuse-protectable output
- 4 = *MasterINPUT*, screw terminal
- 7 = *MasterINPUT*, push-in terminal
- 2 = *MasterOUTPUT*, screw terminal
- 5 = *MasterOUTPUT*, push-in terminal
- 8 = *MasterTIMER* multifunction, screw terminal, fuse-protectable output
- 9 = *MasterTIMER* multifunction, push-in terminal, fuse-protectable output

No. of poles

- 1 = 1 CO (only EMR, except 39.21/51, 1 NO)
- 0 = 1 NO (only SSR)

Coil version, EMR / Input version, SSR

- 0 = AC (50/60 Hz)/DC
- 3 = Leakage current suppression AC (50/60 Hz)
- 7 = DC sensitive
- 8 = AC (50/60 Hz)

Coil voltage, EMR / Input voltage, SSR

See page 16

D: Special Version, EMR

0 = Standard

C: Options, EMR

6 = Standard

B: Contact circuit, EMR

0 = CO (except 39.21/51, 1 NO)

A: Contact material, EMR

0 = AgNi Standard

4 = AgSnO₂

5 = AgNi + Au

ABCD: Output version, SSR

7048 = 0.1 A - 48 V DC

8240 = 2 A - 230 V AC

9024 = 2 A - 24 V DC


EMR - Selecting features and options: only combinations in the same row are possible.
Preferred selections for best availability are shown in **bold**.

| Type | Coil version | A | B | C | D |
|----------|-------------------------------------|------------------|----------|----------|----------|
| 39.11/01 | 0.006 - 0.012 | 0 - 4 - 5 | 0 | 6 | 0 |
| | 0.024 - 0.125 - 8.230 | | | | |
| 39.31/61 | 0.006 - 0.012 | 0 - 4 - 5 | 0 | 6 | 0 |
| | 0.024 - 0.060 | | | | |
| | 7.125 - 7.220 | | | | |
| | 3.125 - 3.230 | | | | |
| 39.41/71 | 0.006 - 0.012 | 0 - 4 - 5 | 0 | 6 | 0 |
| | 0.024 - 0.125 | | | | |
| 39.21/51 | 8.230 | 0 - 4 - 5 | 0 | 6 | 0 |
| | 0.006 - 0.012 | | | | |
| | 0.024 - 0.125 | | | | |
| 39.81/91 | 0.012 - 0.024 | 0 | 0 | 6 | 0 |

SSR - Selecting features and options: only combinations in the same row are possible.
Preferred selections for best availability are shown in **bold**.


| Type | Input version | Output version, ABCD |
|----------|-------------------------------------|---------------------------|
| 39.10/00 | 7.006 - 7.012 | 7048 - 8240 - 9024 |
| | 7.024 - 0.125 - 8.230 | |
| 39.30/60 | 7.006 - 7.012 | 7048 - 8240 - 9024 |
| | 7.024 - 7.060 | |
| | 7.125 - 7.220 | |
| | 0.024 - 0.125 | |
| | 8.230 | |
| 39.40/70 | 7.006 - 7.012 | 7048 - 8240 - 9024 |
| | 7.024 - 0.024 - 0.125 | |
| 39.20/50 | 8.230 | 7048 - 8240 - 9024 |
| | 7.006 - 7.012 | |
| | 7.024 - 0.125 | |
| 39.80/90 | 0.012 - 0.024 | 7048 - 8240 - 9024 |

Technical data


| Insulation according to EN 61810-1 | | | | |
|---|--------------------------|--------------------------|--------------------------|---------------|
| Nominal voltage of supply system | V AC | 230/400 | | |
| Rated insulation voltage | V AC | 250 | 400 | |
| Pollution degree | | 3 | 2 | |
| Insulation between coil and contact set | | | | |
| Type of Insulation | | Reinforced | | |
| Overvoltage category | | III | | |
| Rated impulse voltage | kV (1.2/50) μ s | 6 | | |
| Dielectric strength | V AC | 4,000 | | |
| Insulation between open contacts (EMR) | | | | |
| Type of disconnection | | Micro-disconnection | | |
| Dielectric strength | V AC/kV (1.2/50) μ s | 1,000/1.5 | | |
| Conducted disturbance immunity | | $U_N \leq 60$ V | $U_N = 125$ V | $U_N = 230$ V |
| Fast transients (burst 5/50 ns, 5 kHz) according to EN 61000-4-4 at supply terminals | kV | 4 | 4 | 4 |
| Voltage pulses (surge 1.2/50 μ s) according to EN 61000-4-5 at supply terminals (differential mode) | kV | 0.8 | 2 | 4 |
| Other data | | | | |
| Bounce time (EMR) : NO/NC | ms | 1/6 | | |
| Vibration resistance (EMR, 10..55 Hz): NO/NC | g | 10/15 | | |
| Power lost to the environment | without contact current | W | 0.2 (24 V) – 0.4 (230 V) | |
| | with rated current | W | 0.6 (24 V) – 0.9 (230 V) | |
| Terminals | | | | |
| | | Screw terminal | Push-in terminal | |
| Wire strip length | mm | 10 | 8 | |
|  Screw torque | Nm | 0.5 | — | |
| | | Solid and stranded cable | Solid and stranded cable | |
| Max. wire size | mm ² | 1 x 2.5/2 x 1.5 | | 1 x 2.5 |
| | AWG | 1 x 14/2 x 16 | | 1 x 14 |
| Min. wire size | mm ² | 1 x 0.2 | | 1 x 0.2 |
| | AWG | 1 x 24 | | 1 x 24 |

Contact specification (EMR)

F 39 - Electrical life (AC) v contact current

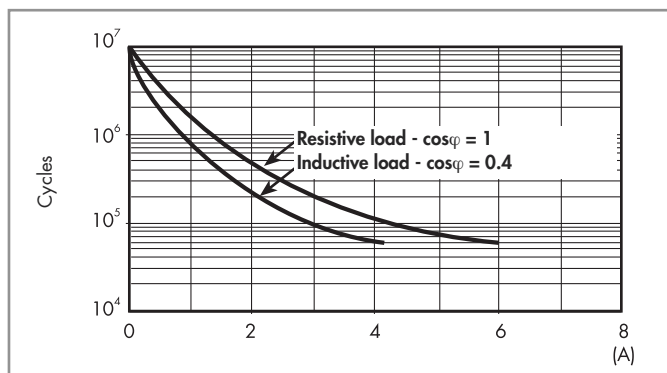

H 39 - Maximum DC1 breaking capacity

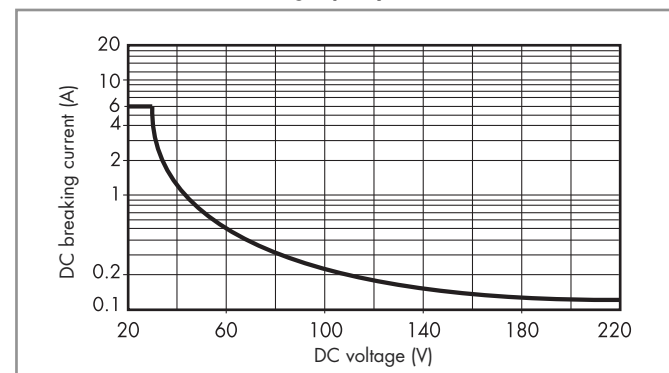

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 60 \cdot 10^3$ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
Note: the release time for the load will be increased.

Coil specifications - Electromechanical Relay

Coil data DC, type 39.31/61

| Nominal Voltage U_N | Coil code | Operating range | | Must drop-out voltage U_r | Rated input current at U_N I_N | Rated power at U_N |
|--------------------------|--------------|-----------------|-----------|--------------------------------|---------------------------------------|-------------------------|
| | | U_{min} | U_{max} | | | |
| V | | V | V | V | mA | W |
| 125 (110...125) | 7.125 | 88 | 138 | 12.5 | 4.6 | 0.6 |
| 220 | 7.220 | 176 | 242 | 22 | 3.0 | 0.6 |

Coil data AC/DC, type 39.11/21/31/41/01/51/61/71

| Nominal Voltage U_N | Coil code | Operating range | | Must drop-out voltage U_r | Rated input current at U_N I_N | Rated power at U_N |
|--------------------------|--------------|-----------------|-----------|--------------------------------|---------------------------------------|-------------------------|
| | | U_{min} | U_{max} | | | |
| V | | V | V | V | mA | VA/W |
| 6 | 0.006 | 4.8 | 6.6 | 0.6 | 35 | 0.2/0.2 |
| 12 | 0.012 | 9.6 | 13.2 | 1.5 | 15 | 0.2/0.2 |
| 24 | 0.024 | 19.2 | 26.4 | 2.4 | 11 | 0.25/0.25 |
| 60 ⁽¹⁾ | 0.060 | 48 | 66 | 6.0 | 5.7 | 0.35/0.35 |
| 125 (110...125) | 0.125 | 88 | 138 | 12.5 | 5.6 | 0.7/0.7 |

⁽¹⁾ 60 V AC/DC for type 39.31/61 only

Coil data AC, type 39.11/21/31/41/01/51/61/71

| Nominal Voltage U_N | Coil code | Operating range | | Must drop-out voltage U_r | Rated input current at U_N I_N | Rated power at U_N |
|--------------------------|--------------|-----------------|-----------|--------------------------------|---------------------------------------|-------------------------|
| | | U_{min} | U_{max} | | | |
| V | | V | V | V | mA | VA/W |
| 230 (230...240) | 8.230 | 184 | 264 | 23 | 4.3 | 1/0.4 |

Coil data leakage current suppression versions, type 39.31.3/61.3

| Nominal Voltage U_N | Coil code | Operating range | | Must drop-out voltage U_r | Rated input current at U_N I_N | Rated power at U_N |
|--------------------------|--------------|-----------------|-----------|--------------------------------|---------------------------------------|-------------------------|
| | | U_{min} | U_{max} | | | |
| V | | V | V | V | mA | VA/W |
| 125 (110...125) | 3.125 | 88 | 138 | 44 | 8.4 | 1.1/1 |
| 230 (230...240) | 3.230 | 184 | 264 | 72 | 5.9 | 1.4/0.5 |

The 39 Series interface modules (supply version 3) have built-in leakage current suppression to address industry concerns of the contacts not dropping-out when there is residual current in the circuit; at (110...125)V AC/DC and (230...240)V AC. This problem can occur, for example, when connecting the interface modules to PLC,s with triac outputs or when connecting via relatively long cables.

Coil data AC/DC timer, type 39.81/91

| Nominal Voltage U_N | Coil code | Operating range (AC/DC) | | Must drop-out voltage U_r | Rated input current at U_N | | Rated power at U_N | |
|--------------------------|--------------|----------------------------|-----------|--------------------------------|------------------------------|----------|----------------------|------------|
| | | U_{min} | U_{max} | | DC mA | AC mA | DC W | AC VA/W |
| V | | V | V | V | mA | mA | W | VA/W |
| 12 | 0.012 | 9.6 | 13.2 | 1.2 | 15 | 23 | 0.2 | 0.3/0.2 |
| 24 | 0.024 | 19.2 | 26.4 | 2.4 | 11 | 19 | 0.25 | 0.4/0.3 |

Input specifications - Solid State Relay

Input data DC, type 39.10/20/30/40/00/50/60/70

| Nominal Voltage U_N | Input code | Operating range | | Must drop-out voltage U_r | Rated input current at U_N I_N | Rated power at U_N W |
|-----------------------------------|--------------|-----------------|-----------|--------------------------------|---------------------------------------|---------------------------|
| | | U_{min} | U_{max} | | | |
| V | | V | V | V | mA | W |
| 6 | 7.006 | 4.8 | 6.6 | 0.6 | 7.5 | 0.2 |
| 12 | 7.012 | 9.6 | 13.2 | 1.2 | 20.7 | 0.25 |
| 24 | 7.024 | 19.2 | 26.4 | 2.4 | 10.5 | 0.25 |
| 60 ⁽¹⁾ | 7.060 | 48 | 66 | 6.0 | 6.4 | 0.4 |
| 125 ⁽¹⁾ (110...125) | 7.125 | 88 | 138 | 12.5 | 4.6 | 0.6 |
| 220 ⁽¹⁾ | 7.220 | 176 | 242 | 22 | 3.0 | 0.6 |

⁽¹⁾ 60 V DC, 125 V DC and 220 V DC for type 39.30/60 only

Input data AC/DC, type 39.10/20/30/40/00/50/60/70

| Nominal Voltage U_N | Input code | Operating range | | Must drop-out voltage U_r | Rated input current at U_N I_N | Rated power at U_N VA/W |
|--------------------------|--------------|-----------------|-----------|--------------------------------|---------------------------------------|------------------------------|
| | | U_{min} | U_{max} | | | |
| V | | V | V | V | mA | VA/W |
| 24 ⁽²⁾ | 0.024 | 19.2 | 26.4 | 2.4 | 17.5 | 0.4/0.3 |
| 125 (110...125) | 0.125 | 88 | 138 | 12.5 | 5.5 | 0.7/0.7 |

⁽²⁾ 24 V AC/DC for type 39.30/40/60/70 only

Input data AC, type 39.10/20/30/40/00/50/60/70

| Nominal Voltage U_N | Input code | Operating range | | Must drop-out voltage U_r | Rated input current at U_N I_N | Rated power at U_N VA/W |
|--------------------------|--------------|-----------------|-----------|--------------------------------|---------------------------------------|------------------------------|
| | | U_{min} | U_{max} | | | |
| V | | V | V | V | mA | VA/W |
| 230 (230...240) | 8.230 | 184 | 264 | 23 | 4.2 | 1/0.4 |

Input data leakage current suppression versions, type 39.30.3/60.3

| Nominal Voltage U_N | Input code | Operating range | | Must drop-out voltage U_r | Rated input current at U_N I_N | Rated power at U_N VA/W |
|--------------------------|--------------|-----------------|-----------|--------------------------------|---------------------------------------|------------------------------|
| | | U_{min} | U_{max} | | | |
| V | | V | V | V | mA | VA/W |
| 125 (110...125) | 3.125 | 88 | 138 | 44 | 8.4 | 1.1/1 |
| 230 (230...240) | 3.230 | 184 | 264 | 72 | 5.9 | 1.4/0.5 |

The 39 Series interface modules (supply version 3) have built-in leakage current suppression to address industry concerns of the contacts not dropping-out when there is residual current in the circuit; at (110...125)V AC/DC and (230...240)V AC. This problem can occur, for example, when connecting the interface modules to PLC,s with triac outputs or when connecting via relatively long cables.

Input data AC/DC timer, type 39.80/90

| Nominal Voltage U_N | Input code | Operating range (AC/DC) | | Must drop-out voltage U_r | Rated input current at U_N | | Rated power at U_N | |
|--------------------------|--------------|-------------------------|-----------|--------------------------------|------------------------------|----|----------------------|---------|
| | | U_{min} | U_{max} | | DC | AC | DC | AC |
| V | | V | V | V | mA | mA | W | VA/W |
| 12 | 0.012 | 9.6 | 13.2 | 1.2 | 15 | 23 | 0.2 | 0.3/0.2 |
| 24 | 0.024 | 19.2 | 26.4 | 2.4 | 11 | 19 | 0.25 | 0.4/0.3 |

Timer specifications

EMC specifications

| Type of test | | Reference standard | |
|---|-----------------------------|--------------------|---------|
| Electrostatic discharge | contact discharge | EN 61000-4-2 | 4 kV |
| | air discharge | EN 61000-4-2 | 8 kV |
| Radio-frequency electromagnetic field | (80 ÷ 1,000 MHz) | EN 61000-4-3 | 10 V/m |
| | (1,400 ÷ 2,700 MHz) | EN 61000-4-3 | 10 V/m |
| Fast transients (burst) (5-50 ns, 5 and 100 kHz) | on Supply terminals | EN 61000-4-4 | 4 kV |
| | on control signal terminals | EN 61000-4-4 | 4 kV |
| Surges (1.2/50 µs) on supply and control signal terminals | common mode | EN 61000-4-5 | 2 kV |
| | differential mode | EN 61000-4-5 | 0.8 kV |
| Radio-frequency common mode (0.15 ÷ 80 MHz) | on Supply terminals | EN 61000-4-6 | 10 V |
| | on control signal terminals | EN 61000-4-6 | 3 V |
| Radiated and conducted emission | | EN 55022 | class B |

Other data

| | | | |
|--|-------------------------|-------|-----|
| Bounce time (EMR) : NO/NC | ms | 1/6 | |
| Vibration resistance (EMR, 10..55 Hz): NO/NC | g | 10/15 | |
| Power lost to the environment | without contact current | W | 0.3 |
| | with rated current | W | 0.8 |

Terminals

| | | Screw terminal | Push-in terminal |
|-------------------|-----------------|--------------------------|--------------------------|
| Wire strip length | mm | 10 | 8 |
| Screw torque | Nm | 0.5 | — |
| Max. wire size | | Solid and stranded cable | Solid and stranded cable |
| | mm ² | 1 x 2.5/2 x 1.5 | 1 x 2.5 |
| Min. wire size | AWG | 1 x 14/2 x 16 | 1 x 14 |
| | mm ² | 1 x 0.2 | 1 x 0.2 |
| | AWG | 1 x 24 | 1 x 24 |

Times scales



Functions

| LED | Supply voltage | NO contact/output |
|-----|----------------|------------------------------------|
| | OFF | Open |
| | ON | Open |
| | ON | Open (timing to close in progress) |
| | ON | Closed |



Wiring diagram

U = Supply voltage


S = Signal switch

= Output contact


Without control signal

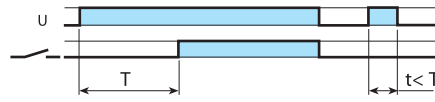


(AI) On-delay
Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.

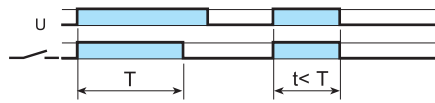

(DI) Interval
Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.

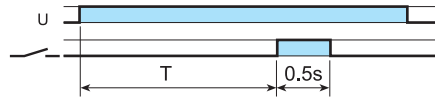


(GI) Pulse (0.5s) delayed
Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs after a fixed time of 0.5s.

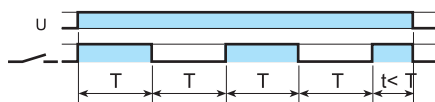


(SW) Symmetrical flasher (starting pulse on)
Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ratio is 1:1 (time on = time off).


With control signal



*With DC supply, positive polarity has to be connected to B1, terminal (according to EN 60204-1).

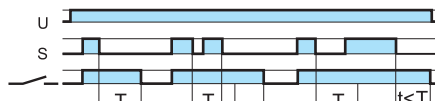

(BE) Off-delay with control signal
Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.

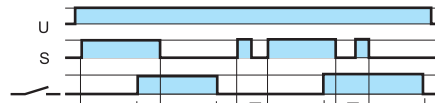


(CE) On- and off-delay with control signal
Power is permanently applied to the timer. Closing the Signal Switch (S) initiates the preset delay, after which time the output contacts transfer. Opening the Signal switch initiates the same preset delay, after which time the output contacts reset.




(DE) Interval with control signal on
Power is permanently applied to the timer. On momentary or maintained closure of Signal Switch (S), the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.



(EE) Interval with control signal off
Power is permanently applied to the timer. On opening of the Signal Switch (S) the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.



• Possible to control an external load, such as another relay coil or timer, connected to the control signal terminal B1.




** A voltage other than the supply voltage can be applied to the command Start (B1), example:

A1 - A2 = 24 V AC
B1 - A2 = 12 V DC


Outline drawings - Screw terminal sockets

Relay interface modules


39.10 / 39.20
39.11 / 39.21
Screw terminal

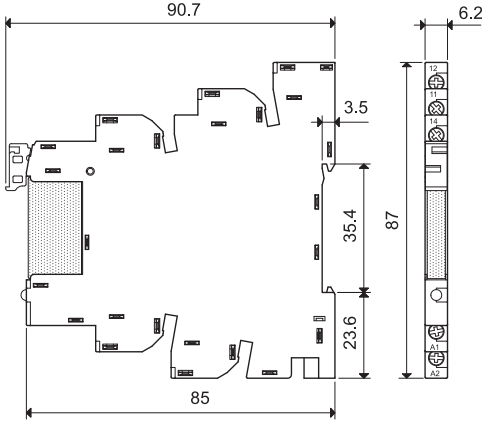


39.30 / 39.30.3
39.31 / 39.31.3
Screw terminal

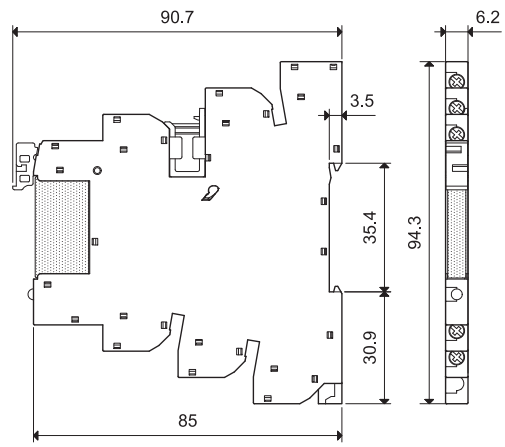

39.40
39.41
Screw terminal

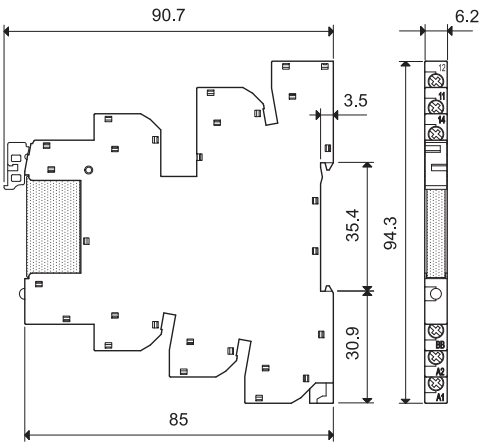


39.80
39.81
Screw terminal

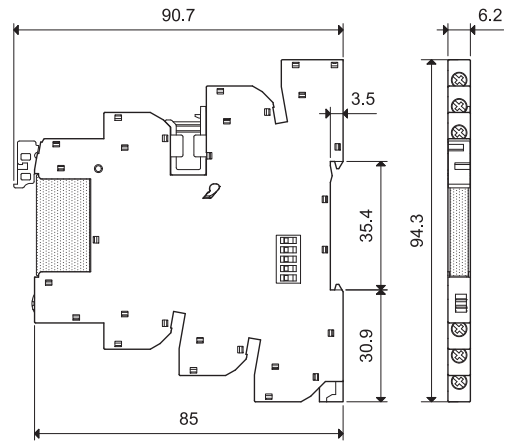


Outline drawings - Push-in terminal sockets


39.00 / 39.01
39.50 / 39.51
Push-in terminal

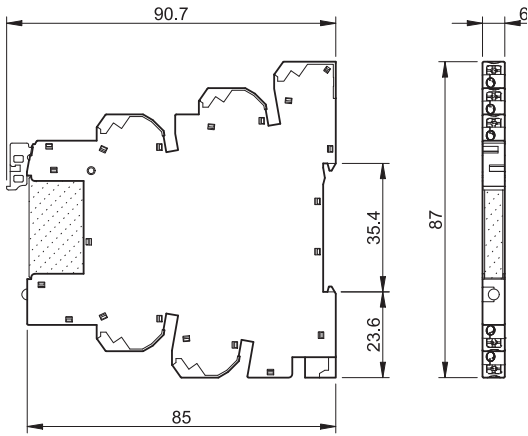


39.70
39.71
Push-in terminal

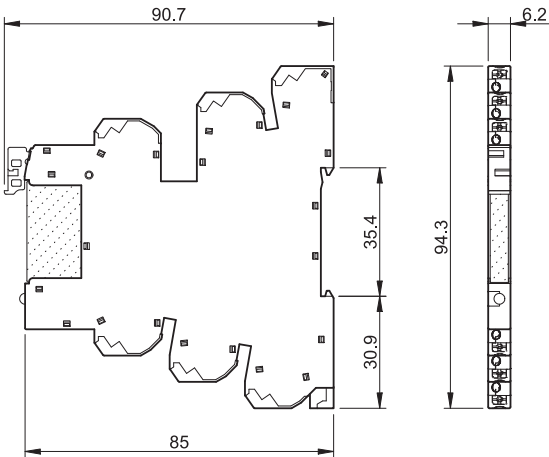

39.60 / 39.60.3
39.61 / 39.61.3
Push-in terminal

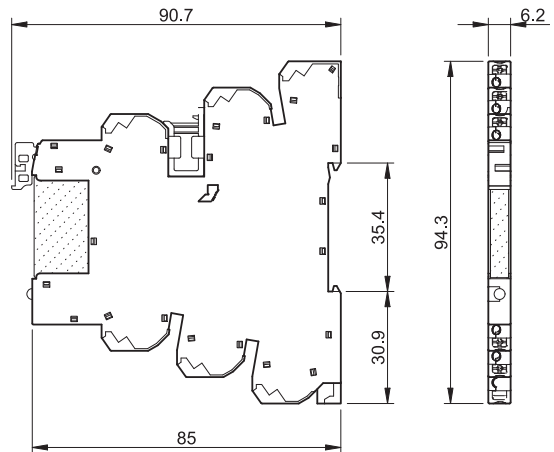


39.90
39.91
Push-in terminal

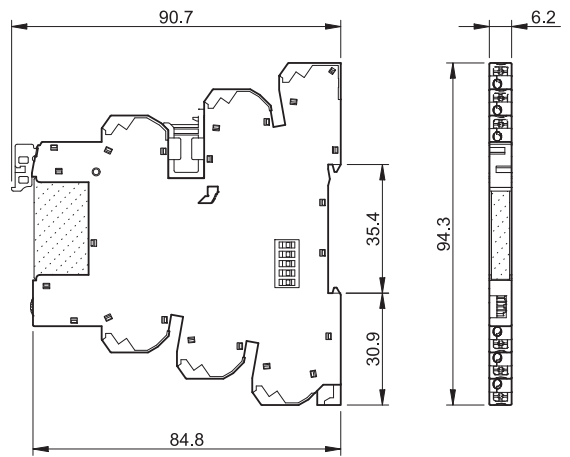

Main features
Push-in terminals

The push-in terminals permit the quick connection of solid wires or ferrules by their simple insertion into the terminal (A). It is possible to open the terminal to extract the wire by first pushing down on the push-button using a screwdriver (C). For stranded cable it is necessary first to open the terminal using the push button, both for the extraction (C) and insertion (B). It is possible at any time to check the connection via the test aperture, using a 2mm diameter test probe (D).

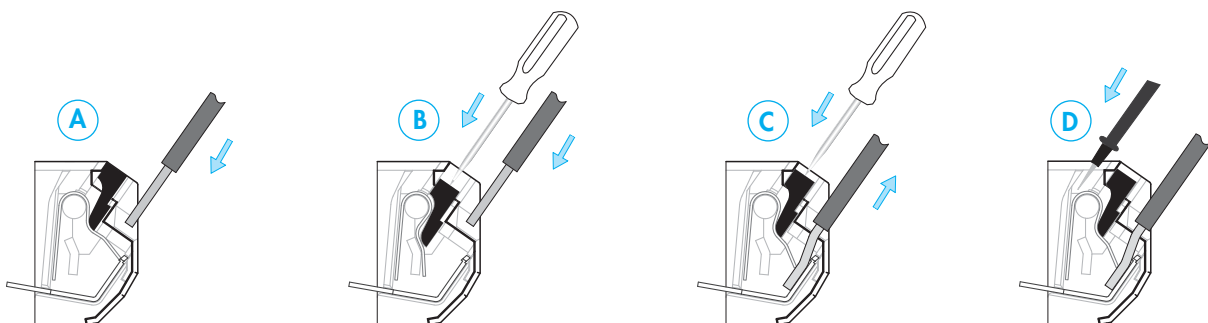

Electromechanical Relay (1 Pole 6 A) & Screw Socket Combinations

| Interface Module Code | Coil voltage | Relay | Socket |
|------------------------------------|---------------------|------------------|-------------|
| MasterBASIC | | | |
| 39.11.0.006.0060 | 6 V AC/DC | 34.51.7.005.0010 | 93.61.7.024 |
| 39.11.0.012.0060 | 12 V AC/DC | 34.51.7.012.0010 | 93.61.7.024 |
| 39.11.0.024.0060 | 24 V AC/DC | 34.51.7.024.0010 | 93.61.7.024 |
| 39.11.0.125.0060 | (110...125)V AC/DC | 34.51.7.060.0010 | 93.61.0.125 |
| 39.11.8.230.0060 | (230...240)V AC | 34.51.7.060.0010 | 93.61.8.230 |
| MasterPLUS | | | |
| 39.31.0.006.0060 | 6 V AC/DC | 34.51.7.005.0010 | 93.63.7.024 |
| 39.31.0.012.0060 | 12 V AC/DC | 34.51.7.012.0010 | 93.63.7.024 |
| 39.31.0.024.0060 | 24 V AC/DC | 34.51.7.024.0010 | 93.63.7.024 |
| 39.31.0.060.0060 | 60 V AC/DC | 34.51.7.060.0010 | 93.63.7.060 |
| 39.31.0.125.0060 | (110...125)V AC/DC | 34.51.7.060.0010 | 93.63.0.125 |
| 39.31.8.230.0060 | (230...240)V AC | 34.51.7.060.0010 | 93.63.8.230 |
| 39.31.7.125.0060 | (110...125)V DC | 34.51.7.060.0010 | 93.63.7.125 |
| 39.31.7.220.0060 | 220 V DC | 34.51.7.060.0010 | 93.63.7.220 |
| 39.31.3.125.0060 | (110...125)V AC/DC | 34.51.7.060.0010 | 93.63.3.125 |
| 39.31.3.230.0060 | (230...240)V AC | 34.51.7.060.0010 | 93.63.3.230 |
| MasterINPUT | | | |
| 39.41.0.006.5060 | 6 V AC/DC | 34.51.7.005.5010 | 93.64.7.024 |
| 39.41.0.012.5060 | 12 V AC/DC | 34.51.7.012.5010 | 93.64.7.024 |
| 39.41.0.024.5060 | 24 V AC/DC | 34.51.7.024.5010 | 93.64.7.024 |
| 39.41.0.125.5060 | (110...125) V AC/DC | 34.51.7.060.5010 | 93.64.0.125 |
| 39.41.8.230.5060 | (230...240)V AC | 34.51.7.060.5010 | 93.64.8.230 |
| MasterOUTPUT 1 NO, 6 A only | | | |
| 39.21.0.006.0060 | 6 V AC/DC | 34.51.7.005.0010 | 93.62.7.024 |
| 39.21.0.012.0060 | 12 V AC/DC | 34.51.7.012.0010 | 93.62.7.024 |
| 39.21.0.024.0060 | 24 V AC/DC | 34.51.7.024.0010 | 93.62.7.024 |
| 39.21.0.125.0060 | (110...125) V AC/DC | 34.51.7.060.0010 | 93.62.0.125 |
| 39.21.8.230.0060 | (230...240)V AC | 34.51.7.060.0010 | 93.62.8.230 |
| MasterTIMER | | | |
| 39.81.0.012.0060 | 12 V AC/DC | 34.51.7.012.0010 | 93.68.0.024 |
| 39.81.0.024.0060 | 24 V AC/DC | 34.51.7.024.0010 | 93.68.0.024 |

Solid State Relay (1 Pole 0.1 or 2 A) & Screw Socket Combinations

| Interface Module Code | Input voltage | Relay | Socket |
|-----------------------|---------------------|------------------|-------------|
| MasterBASIC | | | |
| 39.10.7.006.xxxx | 6 V DC | 34.81.7.005.xxxx | 93.61.7.024 |
| 39.10.7.012.xxxx | 12 V DC | 34.81.7.012.xxxx | 93.61.7.024 |
| 39.10.7.024.xxxx | 24 V DC | 34.81.7.024.xxxx | 93.61.7.024 |
| 39.10.0.125.xxxx | (110...125)V AC/DC | 34.81.7.060.xxxx | 93.61.0.125 |
| 39.10.8.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.61.8.230 |
| MasterPLUS | | | |
| 39.30.7.006.xxxx | 6 V DC | 34.81.7.005.xxxx | 93.63.7.024 |
| 39.30.7.012.xxxx | 12 V DC | 34.81.7.012.xxxx | 93.63.7.024 |
| 39.30.7.024.xxxx | 24 V DC | 34.81.7.024.xxxx | 93.63.7.024 |
| 39.30.7.060.xxxx | 60 V DC | 34.81.7.060.xxxx | 93.63.7.060 |
| 39.30.7.125.xxxx | (110...125)V DC | 34.81.7.060.xxxx | 93.63.7.125 |
| 39.30.7.220.xxxx | 220 V DC | 34.81.7.060.xxxx | 93.63.7.220 |
| 39.30.0.024.xxxx | 24 V AC/DC | 34.81.7.024.xxxx | 93.63.0.024 |
| 39.30.0.125.xxxx | (110...125)V AC/DC | 34.81.7.060.xxxx | 93.63.0.125 |
| 39.30.8.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.63.8.230 |
| 39.30.3.125.xxxx | (110...125)V AC/DC | 34.81.7.060.xxxx | 93.63.3.125 |
| 39.30.3.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.63.3.230 |
| MasterINPUT | | | |
| 39.40.7.006.xxxx | 6 V DC | 34.81.7.005.xxxx | 93.64.7.024 |
| 39.40.7.012.xxxx | 12 V DC | 34.81.7.012.xxxx | 93.64.7.024 |
| 39.40.7.024.xxxx | 24 V DC | 34.81.7.024.xxxx | 93.64.7.024 |
| 39.40.0.024.xxxx | 24 V AC/DC | 34.81.7.024.xxxx | 93.64.0.024 |
| 39.40.0.125.xxxx | (110...125) V AC/DC | 34.81.7.060.xxxx | 93.64.0.125 |
| 39.40.8.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.64.8.230 |
| MasterOUTPUT | | | |
| 39.20.7.006.xxxx | 6 V DC | 34.81.7.005.xxxx | 93.62.7.024 |
| 39.20.7.012.xxxx | 12 V DC | 34.81.7.012.xxxx | 93.62.7.024 |
| 39.20.7.024.xxxx | 24 V DC | 34.81.7.024.xxxx | 93.62.7.024 |
| 39.20.0.125.xxxx | (110...125) V AC/DC | 34.81.7.060.xxxx | 93.62.0.125 |
| 39.20.8.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.62.8.230 |
| MasterTIMER | | | |
| 39.80.0.012.xxxx | 12 V AC/DC | 34.81.7.012.xxxx | 93.68.0.024 |
| 39.80.0.024.xxxx | 24 V AC/DC | 34.81.7.024.xxxx | 93.68.0.024 |

Example: .xxxx
.9024
.7048
.8240

Electromechanical Relay (1 Pole 6 A) & Push-in Socket Combinations

| Interface Module Code | Coil voltage | Relay | Socket |
|------------------------------------|---------------------|------------------|-------------|
| MasterBASIC | | | |
| 39.01.0.006.0060 | 6 V AC/DC | 34.51.7.005.0010 | 93.60.7.024 |
| 39.01.0.012.0060 | 12 V AC/DC | 34.51.7.012.0010 | 93.60.7.024 |
| 39.01.0.024.0060 | 24 V AC/DC | 34.51.7.024.0010 | 93.60.7.024 |
| 39.01.0.125.0060 | (110...125)V AC/DC | 34.51.7.060.0010 | 93.60.0.125 |
| 39.01.8.230.0060 | (230...240)V AC | 34.51.7.060.0010 | 93.60.8.230 |
| MasterPLUS | | | |
| 39.61.0.006.0060 | 6 V AC/DC | 34.51.7.005.0010 | 93.66.7.024 |
| 39.61.0.012.0060 | 12 V AC/DC | 34.51.7.012.0010 | 93.66.7.024 |
| 39.61.0.024.0060 | 24 V AC/DC | 34.51.7.024.0010 | 93.66.7.024 |
| 39.61.0.060.0060 | 60 V AC/DC | 34.51.7.060.0010 | 93.66.7.060 |
| 39.61.0.125.0060 | (110...125)V AC/DC | 34.51.7.060.0010 | 93.66.0.125 |
| 39.61.8.230.0060 | (230...240)V AC | 34.51.7.060.0010 | 93.66.8.230 |
| 39.61.7.125.0060 | (110...125)V DC | 34.51.7.060.0010 | 93.66.7.125 |
| 39.61.7.220.0060 | 220 V DC | 34.51.7.060.0010 | 93.66.7.220 |
| 39.61.3.125.0060 | (110...125)V AC/DC | 34.51.7.060.0010 | 93.66.3.125 |
| 39.61.3.230.0060 | (230...240)V AC | 34.51.7.060.0010 | 93.66.3.230 |
| MasterINPUT | | | |
| 39.71.0.006.5060 | 6 V AC/DC | 34.51.7.005.5010 | 93.67.7.024 |
| 39.71.0.012.5060 | 12 V AC/DC | 34.51.7.012.5010 | 93.67.7.024 |
| 39.71.0.024.5060 | 24 V AC/DC | 34.51.7.024.5010 | 93.67.7.024 |
| 39.71.0.125.5060 | (110...125) V AC/DC | 34.51.7.060.5010 | 93.67.0.125 |
| 39.71.8.230.5060 | (230...240)V AC | 34.51.7.060.5010 | 93.67.8.230 |
| MasterOUTPUT 1 NO, 6 A only | | | |
| 39.51.0.006.0060 | 6 V AC/DC | 34.51.7.005.0010 | 93.65.7.024 |
| 39.51.0.012.0060 | 12 V AC/DC | 34.51.7.012.0010 | 93.65.7.024 |
| 39.51.0.024.0060 | 24 V AC/DC | 34.51.7.024.0010 | 93.65.7.024 |
| 39.51.0.125.0060 | (110...125) V AC/DC | 34.51.7.060.0010 | 93.65.0.125 |
| 39.51.8.230.0060 | (230...240)V AC | 34.51.7.060.0010 | 93.65.8.230 |
| MasterTIMER | | | |
| 39.91.0.012.0060 | 12 V AC/DC | 34.51.7.012.0010 | 93.69.0.024 |
| 39.91.0.024.0060 | 24 V AC/DC | 34.51.7.024.0010 | 93.69.0.024 |

Solid State Relay (1 Pole 0.1 or 2 A) & Push-in Socket Combinations



| Interface Module Code | Input voltage | Relay | Socket |
|-----------------------|---------------------|------------------|-------------|
| MasterBASIC | | | |
| 39.00.7.006.xxxx | 6 V DC | 34.81.7.005.xxxx | 93.60.7.024 |
| 39.00.7.012.xxxx | 12 V DC | 34.81.7.012.xxxx | 93.60.7.024 |
| 39.00.7.024.xxxx | 24 V DC | 34.81.7.024.xxxx | 93.60.7.024 |
| 39.00.0.125.xxxx | (110...125)V AC/DC | 34.81.7.060.xxxx | 93.60.0.125 |
| 39.00.8.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.60.8.230 |
| MasterPLUS | | | |
| 39.60.7.006.xxxx | 6 V DC | 34.81.7.005.xxxx | 93.66.7.024 |
| 39.60.7.012.xxxx | 12 V DC | 34.81.7.012.xxxx | 93.66.7.024 |
| 39.60.7.024.xxxx | 24 V DC | 34.81.7.024.xxxx | 93.66.7.024 |
| 39.60.7.060.xxxx | 60 V DC | 34.81.7.060.xxxx | 93.66.7.060 |
| 39.60.7.125.xxxx | (110...125)V DC | 34.81.7.060.xxxx | 93.66.7.125 |
| 39.60.7.220.xxxx | 220 V DC | 34.81.7.060.xxxx | 93.66.7.220 |
| 39.60.0.024.xxxx | 24 V AC/DC | 34.81.7.024.xxxx | 93.66.0.024 |
| 39.60.0.125.xxxx | (110...125)V AC/DC | 34.81.7.060.xxxx | 93.66.0.125 |
| 39.60.8.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.66.8.230 |
| 39.60.3.125.xxxx | (110...125)V AC/DC | 34.81.7.060.xxxx | 93.66.3.125 |
| 39.60.3.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.66.3.230 |
| MasterINPUT | | | |
| 39.70.7.006.xxxx | 6 V DC | 34.81.7.005.xxxx | 93.67.7.024 |
| 39.70.7.012.xxxx | 12 V DC | 34.81.7.012.xxxx | 93.67.7.024 |
| 39.70.7.024.xxxx | 24 V DC | 34.81.7.024.xxxx | 93.67.7.024 |
| 39.70.0.024.xxxx | 24 V AC/DC | 34.81.7.024.xxxx | 93.67.0.024 |
| 39.70.0.125.xxxx | (110...125) V AC/DC | 34.81.7.060.xxxx | 93.67.0.125 |
| 39.70.8.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.67.8.230 |
| MasterOUTPUT | | | |
| 39.50.7.006.xxxx | 6 V DC | 34.81.7.005.xxxx | 93.65.7.024 |
| 39.50.7.012.xxxx | 12 V DC | 34.81.7.012.xxxx | 93.65.7.024 |
| 39.50.7.024.xxxx | 24 V DC | 34.81.7.024.xxxx | 93.65.7.024 |
| 39.50.0.125.xxxx | (110...125) V AC/DC | 34.81.7.060.xxxx | 93.65.0.125 |
| 39.50.8.230.xxxx | (230...240)V AC | 34.81.7.060.xxxx | 93.65.8.230 |
| MasterTIMER | | | |
| 39.90.0.012.xxxx | 12 V AC/DC | 34.81.7.012.xxxx | 93.69.0.024 |
| 39.90.0.024.xxxx | 24 V AC/DC | 34.81.7.024.xxxx | 93.69.0.024 |

Accessories



093.63

Approvals
(according to type):



Output fuse module for 39.31/30/81/80/61/60/91/90 types

093.63

- For 5 x 20 mm fuses up to 6 A, 250 V
- Easy visibility of the fuse condition through the window
- Quick connection to socket



Notes

Safety: Because the output circuit can be reinstated (point 3 below), even with the fuse removed, it is important not to consider the removal of the fuse as a "safety disconnect". Always isolate elsewhere before working on the circuit.



UL: According to UL508A, the fuse module cannot be installed in power circuits (in which it is mandatory that a fuse certified according to UL category JDDZ be fitted). However, where the MasterInterface is connected as an output interface to a PLC no such restrictions apply, and the fuse module can be usefully employed.

Multi-state fuse module


0. As delivered, the socket comes without a fuse module. However, the absent fuse is internally replaced with an electrical link - which allows the interface relay to be used without a fuse module. In this state, the peg/indicator is visually hidden and the connection is protected by a special cap.

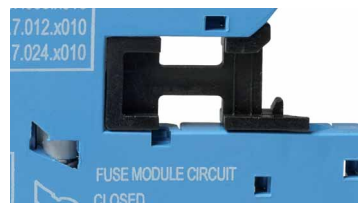

1. With fuse module inserted after removing the cap, the fuse is positioned electrically in series with the common output terminal of the interface module (11 for EMR versions, 13+ for SSR versions, 15 for EMR timer, 15+ for SSR timer). This state is indicated by the peg/indicator.

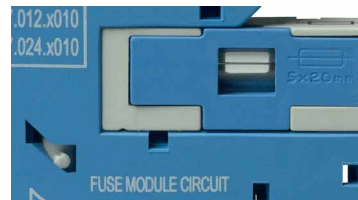

2. If the fuse module is extracted (for example; because the fuse element has blown) the output circuit will be locked open, as this will generally be the "safe option". This state is indicated by the peg/indicator.

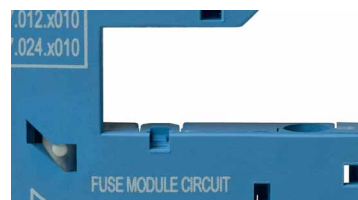

3. In order to reinstate the output circuit it is necessary to either re-insert the fuse module (complete with functional fuse), or alternatively, return the peg/indicator to position 0 by gently applying pressure in the direction of the arrow.



Accessories



093.16

093.16.0

093.16.1


 Approvals
(according to type):


| | | | |
|--|---------------|------------------|----------------|
| 16-way jumper link | 093.16 (blue) | 093.16.0 (black) | 093.16.1 (red) |
| Rated values | 36 A - 250 V | | |
| Possibility of multiple connection, side by side | | | |

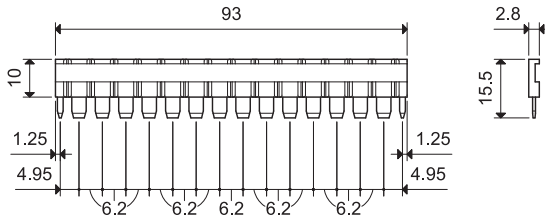

093.60


Dual-purpose plastic separator (1.8 mm or 6.2 mm separation) | 093.60


1. By breaking off the protruding ribs (by hand), the separator becomes only 1.8 mm thick; useful for the visual separation of different groups of interfaces, or necessary for the protective separation of different voltages of neighbouring interfaces, or for the protection of cut ends of jumper links.

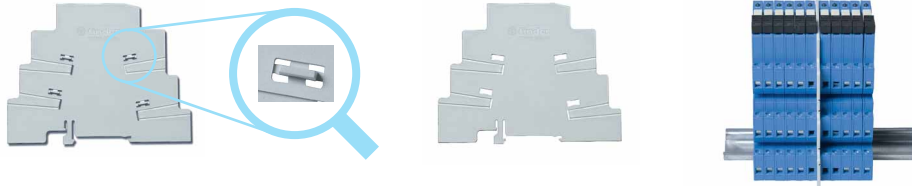

2. Leaving the ribs in place provides 6.2mm separation. Simply cutting (with scissors) the relevant segment(s) permits the interconnection across the separator of 2 different groups of interface relays, using the standard jumper link.

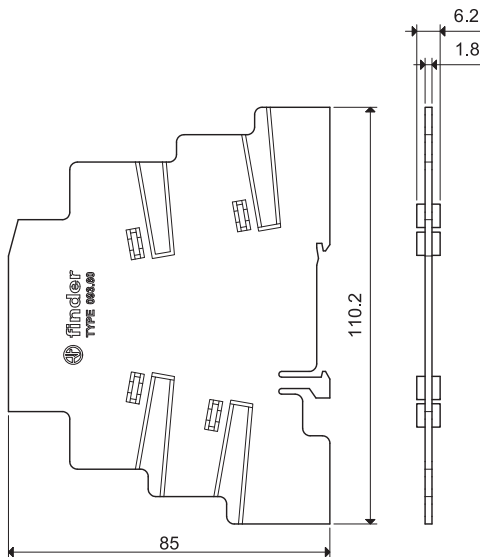

| | |
|--|--------|
| Sheet of marker tags, plastic, 72 tags, 6x12 mm | 060.72 |
|--|--------|


060.72

Accessories



093.68.14.1

Approvals
(according to type):



Connected MasterADAPTER

MasterADAPTER 093.68.14.1

The **MasterADAPTER** permits the easy connection of A1/A2 terminals of up to **MasterINTERFACE** modules to PLC outputs via a 14-Pole ribbon cable, plus simple 2-wire power supply connection.

Technical data

| | | |
|-----------------------------------|------|----------------------------|
| Rated current (per signal path) | A | 1 |
| Minimum required supply power | W | 3 |
| Nominal voltage (U _N) | V DC | 24 |
| Operating range | | (0.8...1.1) U _N |
| Control logic | | Positive switching (to A1) |
| Power supply status indication | | Green LED |
| Ambient temperature range | °C | -40...+70 |

Terminals for 24 V control logic

Type of connector 14 pole, according to IEC 60603-13

Terminals for 24 V power supply

| | | |
|-------------------|-----------------|-----------------|
| Wire strip length | mm | 9.5 |
| ⊕ Screw torque | Nm | 0.5 |
| Max. wire size | | |
| solid wire | mm ² | 1 x 4/2 x 1.5 |
| | AWG | 1 x 12/2 x 16 |
| stranded wire | mm ² | 1 x 2.5/2 x 1.5 |
| | AWG | 1 x 14/2 x 16 |

Wiring diagram

