

AXSOLIGHT HIGH POWER LED

PRELIMINARY SPEC

Features

- Dimension: 48mm x 5mm x 1.6mm.
- Instant light.
- Linear type.
- · High efficiency.
- Long operating life.
- Low power consumption.
- More energy efficient than incandescent, most halogen lamps, and fluorescent lamp.
- RoHS compliant.



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES





Description

The package containing fifteen chips is capable of providing high brightness.

High thermal dissipation efficiency is achieved by incorporating aluminium as reflector and also substrate to ensure long operating life.

Applications


Ceiling lights.

Contour lights.

Decoration lights.

General lighting.

Architectural lighting.

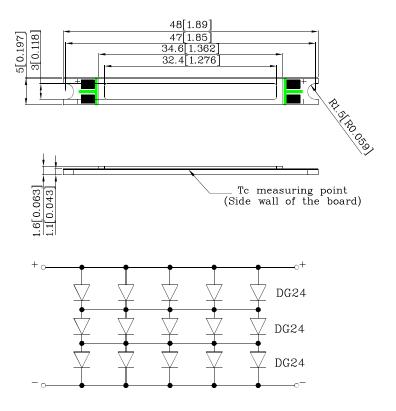

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
- $3. \ {\rm Specifications}$ are subject to change without notice.


Published Date : APR 13, 2009 Drawing No : XDSB3099 V1 Checked : B.L.LIU P.1/8




AXSOLIGHT HIGH POWER LED

Precautions

- 1. Do not touch the lens with any sharp object.
- 2. No stress should be applied on the lens.

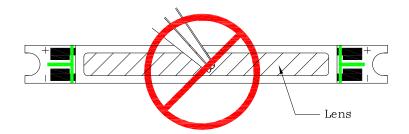

- 3. Thermal grease between the light bar and heat sink is recommended to fill air gaps for better thermal conductivity.
- 4. For securing the LED light bar, M2 screws are recommended. The light bar should not be bent or stressed in any way which could damage the internal circuit.

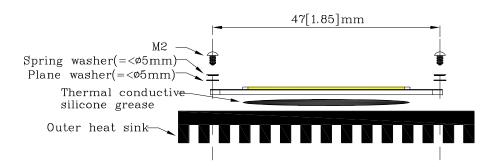

- 5. To prevent damages caused by electrostatic discharge (ESD), it is recommended to wear proper gear such as wristband or anti-static gloves when handling the product.
- 6. Constant current source is recommended to power the light bar . When more than one light bar are used, they should be connected in series if possible.
- 7. Thermal management should be taken into consideration when using the product. Maximum driving current should be reduced accordingly at higher ambient temperature to prevent overheating.
- 8. Soldering recommendations:
 - Soldering iron power should not exceed 40W, and should not be in contact with the joint for more than 3.5 secs.
 - \bullet The maximum soldering temperature should be less than 350°C.
 - Do not touch the product immediately after soldering.
 - Not reflow compatible.

Published Date : APR 13, 2009 Drawing No : XDSB3099 V1 Checked : B.L.LIU P.2/8





AXSOLIGHT HIGH POWER LED

Absolute Maximum Ratings

Parameter	Symbol	Rating	Units	
Forward Current	IF	700	mA	
Forward Pulse Current [1]	IFP	1000	mA	
Power Dissipation	Pd	8.12	W	
LED Junction Temperature	Tj	120	°C	
Operating Temperature	Topr	-30~+100	°C	
Storage Temperature	Tstg	-40~+120	°C	
Case Temperature	Tc	100	°C	

Note:

Electrical / Optical Characteristics

Part Name	Device	Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
XZDG24X112S7W-A Gree		Forward Voltage [2]	V_{F}	8.6	10	11.6	V	IF=700mA
		Luminous Flux [3]	Φ_{V}	160	195	-	lm	IF=700mA
		Wavelength at peak emission[4]	λpeak	-	515	-	nm	IF=700mA
		Dominant Wavelength	λdom	-	525	-	nm	IF=700mA
		Spectral bandwidth at $50\%\Phi REL\ MAX$	$\Delta\lambda 1/2$	-	30	-	nm	IF=700mA
		Temperature coefficient of λ peak	TCλpeak	-	0.14	-	nm/°C	IF=700mA
	Green	Temperature coefficient of λdom	TCλdom	-	0.11	-	nm/°C	IF=700mA
		Temperature coefficient of Forward Voltage	ΔλV _F /ΔΤ	=	-4	ı	mV/°C	IF=700mA
		Thermal Resistance	Rth j-c	-	3.5	1	°C/W	IF=700mA
		Emission Angle	2 θ 1/2 x direction	-	120	-	0	IF=700mA
			2 0 1/2 y direction	-	120	-	o	IF=700mA

Notes:

- 2. Forward Voltage is measured with an accuracy of +/-0.1V.
- 3. Flux is measured with an accuracy of +/-15%.
- $4. \ Wavelength \hbox{ :+/-0.1nm}.$

Test Item	Test Condition	
Moisture-proof Test	85°C , 85%RH for 1000 hours	

Published Date : APR 13, 2009 Drawing No : XDSB3099 V1 Checked : B.L.LIU P.3/8


 $^{1.\ 1/10}$ Duty Cycle, $0.1 \mathrm{ms}$ Pulse Width.




AXSOLIGHT HIGH POWER LED




Forward Current - Forward Voltage Characteristic

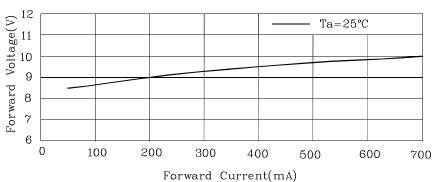

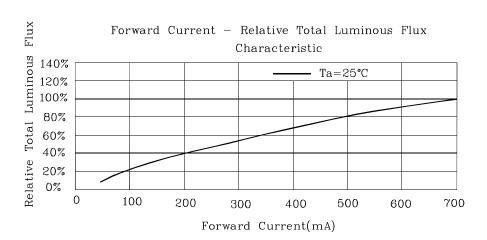


Forward Current - Relative Wavelength Change Characteristic

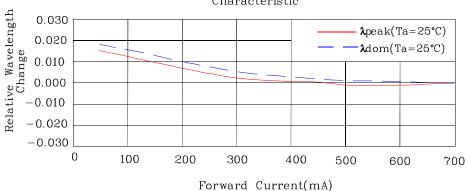



Published Date: APR 13, 2009 V1 P.4/8 Drawing No: XDSB3099 Checked: B.L.LIU

www.SunLEDusa.com






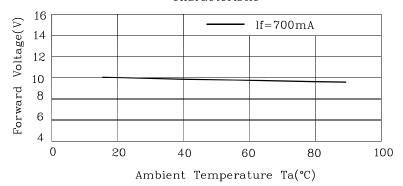

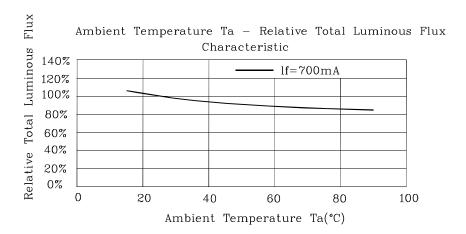



Ambient temperature Ta - Relative Wavelength change characteristic

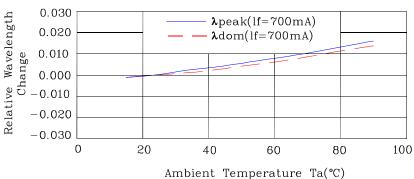

Published Date : APR 13, 2009 Drawing No : XDSB3099 V1 Checked : B.L.LIU P.5/8

AXSOLIGHT HIGH POWER LED

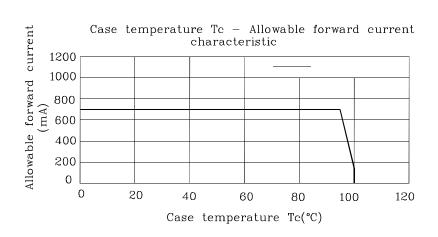

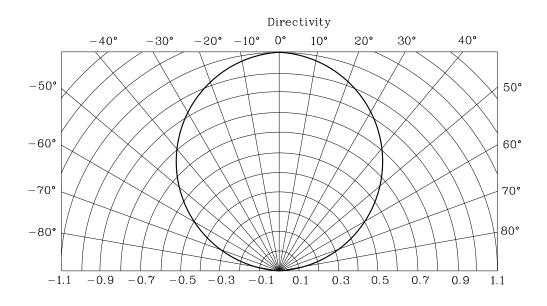



X Direction

Y Direction

Published Date : APR 13, 2009 Drawing No : XDSB3099 V1 Checked : B.L.LIU P.6/8

AXSOLIGHT HIGH POWER LED

PACKING & LABEL SPECIFICATIONS


XZDG24X112S7W-A

PACKING & LABEL SPECIFICATION


(1) Primary packing

50 pieces are contained in each tray.
Two trays which collectively contain 100 pieces are stacked together with an additional empty tray as lid.
Tray (Dimensions: 398x218x12mm, materials: electrically conductive PS.)


(2) Secondary packing
A set of three trays is placed in bag. (100 pieces per bag.)
An indication label which specifies product name, quantity, lot number and shipment date is attached to the outside of the 9# box. (800 pieces per box.)

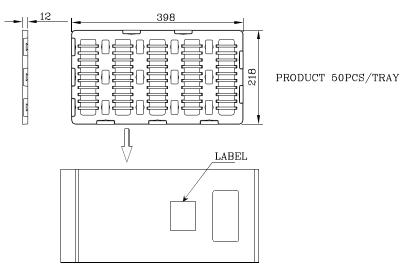



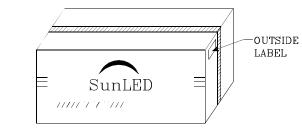

800 PCS / BOX

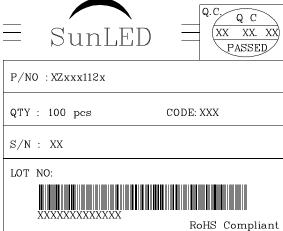

Published Date: APR 13, 2009

Drawing No : XDSB3099 V1 Checked : B.L.LIU P.7/8



AXSOLIGHT HIGH POWER LED


XZxxx112x-A Application Note

Introduction

The XZxxx112x-A LED strips provide very high light output, and can be configured to suit a wide rage of applications. However the heat generated during operation, if not handled properly, could shorten the product life significantly. Therefore for optimal performance, proper thermal management should be incorporated to keep it below the rated temperature. This document describes the heat sink attachment procedure.

Attachment to Heat sink


1. Apply a thin layer $(0.1 \sim 0.2 \text{ mm})$ of thermal grease on the bottom of the XZxxx112x-A LED strip.

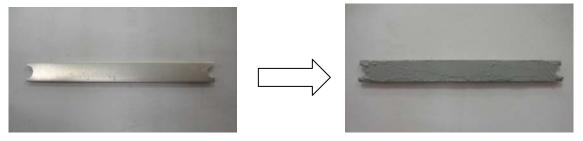

Rear surface


Thermal glue on rear surface

2. Press the XZxxx112x-A LED strip firmly on the heat sink to ensure good contact between the heat sink and the LED strip. A guide for heat sink size selection at various driving currents is listed in the table below.



3. A specifically designed electronic circuit is required to power the LED strip. Do not connect the product directly to the main power.

Current (mA)	350	500	600	700
Heat sink surface area (mm²)	10,000	15,000	17,000	21,000

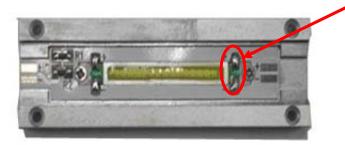

It is strongly recommended that temperature of pad be not highter than 75°C when you use the product.

Published Date: APR 13, 2009 Drawing No: XDSB3099 V1Checked: B.L.LIU P.8/8