


## Ordering Scheme

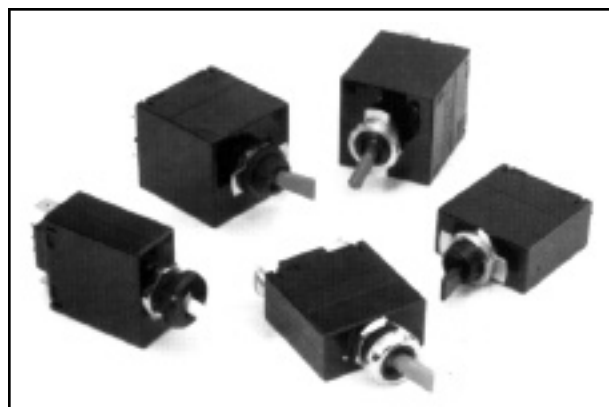

**PROD CODE**  
M

**POLES**  
1 One  
2 Two

### FREQUENCY & DELAY

**03<sup>5</sup>** No Delay Applicable  
DC, 50/60Hz "Switch Only"  
circuit option  
**30** DC, 50/60Hz Instantaneous  
**32** DC, 50/60Hz Short  
**34** DC, 50/60Hz Medium  
**92** DC, 50/60Hz Short, High Inrush  
**94** DC, 50/60Hz Medium, High Inrush

## M-Series Handle

**M M 2 - B - 34 -**

**ACTUATOR<sup>1</sup>**  
M Paddle  
N Baton

### CIRCUIT

**WITHOUT AUXILIARY SWITCH**  
**A<sup>5</sup>** Switch Only (No Coil)/Maintained Contacts  
**B** Series Trip (Current Coil)

**Circuit**  
**WITH AUXILIARY SWITCH - SILVER CONTACTS<sup>2</sup>**  
**P<sup>5</sup>** Switch Only (Maintained Contacts) .060 Dia. Dbl. Solder Turret  
**Q<sup>5</sup>** Switch Only (Maintained Contacts) .058 Dia. Round Q.C.<sup>6</sup>  
**S** Series Trip (Current Coil) .060 Dia. Dbl. Solder Turret  
**T** Series Trip (Current Coil) .058 Dia. Round Q.C.<sup>6</sup>  
**WITH AUXILIARY SWITCH - GOLD CONTACTS<sup>2</sup>**  
**2<sup>5</sup>** Switch Only (Maintained Contacts) .058 Dia. Round Q.C.<sup>6</sup>  
**4** Series Trip (Current Coil) .058 Dia. Round Q.C.<sup>6</sup>

### Aux. Switch Term. Type

### NOTES

- Paddle: Baton: One handle per unit is provided in center of cover. Unless otherwise specified, all actuator styles have gloss finish.
- One Auxiliary Switch is supplied when specified. In two pole units, auxiliary switch is mounted in pole 1.
- This is only a partial listing of the many ratings available. For other ratings, please consult factory.
- For "Switch Only" (no coil) versions, select Current Rating Code from the following chart (Consult factory for special catalog number.)

VOLTAGE			FULL LOAD AMP RATING		GENERAL PURPOSE AMP RATING		TUNGSTEN LAMP RATING		POLE BREAKING
MAX. RATING	FREQUENCY	PHASE	MAX. AMPS	CHOOSE CURRENT COIL RATING CODE	MAX. AMPS	CHOOSE CURRENT COIL RATING CODE	MAX. AMPS	CHOOSE CURRENT COIL RATING CODE	
32	DC	-	15	915	25	920	-	-	1
60	DC	-	-	-	7.5	-	-	-	1
65	DC	-	15	915	25	920	-	-	2
125	50/60 HZ	1	15	915	25	920	15	915	1
150	50/60 HZ	1	12	912	-	922	-	-	1
250	50/60 HZ	1	15	915	25	920	-	-	2

- Mates with AMP<sup>®</sup> .058 inch Dia. Pin Receptacles; P/N's 60983-1 (gold plated) and 60983-2 (tin plated).
- All units have 1 hex nut installed on bushing for use behind panel. Front panel hardware may be selected. If no front panel hardware is desired, select Panel Hardware Type Code 1.