



L = 1.250, 1.625 w/stud
W = 1.450
H = 2.101 max.




275F SERIES

Stock No.	Series	Contacts		Coil		
		Arrang.	Rating (Amps)	Input Voltages	Resistance (Ohms)	Nominal Power
20844-82	275F	DPDT	30A	24VAC	56	2.4VA
20844-84	275F	DPDT	30A	120VAC	1,500	2.4VA
20844-82	275F	SPST-NO-DM	35A	24VDC	315	1.8W
20852-82	275F	DPDT	30A	24VDC	315	1.8W

General purpose relays with plastic dust cover with flange mounting, barrier-type .250" quick-connect terminals and molded Class F coil. Recognized under the Components Program of Underwriters Laboratories, Inc. (File No. E37066). Certified under SEMKO (Certificate No. 9648100/01)

3-POLE, 30AMP POWER RELAYS




L = 1-2/5
W = 2-3/4
H = 2-1/2



375 SERIES

Stock No.	Series	Contacts		Coil		
		Arrang.	Rating (Amps)	Input Voltages	Resistance (Ohms)	Nominal Power
21009-82	375TM	3PST-NO	30A	24VAC	38	4.6VA
21009-84	375TM	3PST-NO	30A	120VAC	970	4.6VA
21009-85	375TM	3PST-NO	30A	240VAC	3800	4.6VA
21011-82	375TM	3PDT	30A	24VAC	38	4.6VA
21011-84	375TM	3PDT	30A	120VAC	970	4.6VA
21011-85	375TM	3PDT	30A	240VAC	3800	4.6VA
21012-82	375TM	3PST-NO	30A	24VDC	230	2.6W
21014-81	375TM	3PDT	30A	12VDC	56	2.6W
21014-82	375TM	3PDT	30A	24VDC	230	2.6W

30-Amp, 3-Pole Relay can replace similarly rated contactors. Compact size saves space, plus offers double-throw configuration. Available in "F" case like 275 "F" above also. UL File recognition E37066.

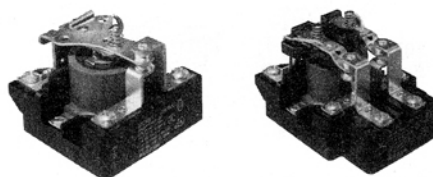

Single Pole
L = 2-1/2
W = 2-1/2
H = 2-3/16



Double Pole
L = 3-11/32
W = 2-1/2
H = 2-3/8



900 SERIES

Stock No.	Series	Contacts		Coil		
		Arrang.	Rating (Amps)	Input Voltages	Resistance (Ohms)	Nominal Power
20237-82	900	SPST-NO	30A	24VAC	11.5	9.5VA
20237-83	900	SPST-NO	30A	120VAC	295	9.5VA
20238-82	900	SPST	30A	24VAC	11.5	9.5VA
20238-83	900	NO-DM	30A	120VAC	295	9.5VA
20239-82	900	SPDT	30A	24VAC	11.5	9.5VA
20239-83	900	SPDT	30A	120VAC	295	9.5VA
20240-82	900	DPST-NO	30A	24VAC	11.5	9.5VA
20240-83	900	DPST-NO	30A	120VAC	295	9.5VA
20240-84	900	DPST-NO	30A	240VAC	1,170	9.5VA
20241-82	900	DPDT	30A	24VAC	11.5	9.5VA
20241-83	900	DPDT	30A	120VAC	295	9.5VA
20241-84	900	DPDT	30A	240VAC	1,170	9.5VA
20243-81	900	SPDT	30A	12VDC	72	2W
20243-82	900	SPDT	30A	24VDC	290	2W
20244-81	900	DPST-NO	30A	12VDC	72	2W
20244-82	900	DPST-NO	30A	24VDC	290	2W
20245-81	900	DPDT	30A	12VDC	72	2W
20245-82	900	DPDT	30A	24VDC	290	2W
20245-84	900	DPDT	30A	110VDC	6,050	2W



B-5 DUST COVER
L = 5
W = 4
H = 3

S/N 20257-80 — List - \$10.50

Sealed knock-out holes for standard conduit fittings. Relay mounts on pre-drilled base. Constructed of Aluminum. Snap action cover release. Accommodates relay series 900.

ALL DIMENSIONS ARE NOMINAL.