

L = 4-1/4
W = 2-1/2
H = 2-3/8



900 Series heavy duty power relay with snap-action, 10 amp, 1/4 hp, SPDT auxiliary switch. Molded Class F coil resists fungus and moisture. Recognized under the Components Program of Underwriters Laboratories, Inc. (File No. E37066).

900-1C SERIES

Stock No.	Series	Contacts		Coil		
		Arrang.	Rating (Amps)	Input Voltages	Resistance (Ohms)	Nominal Power
20246-83	900-1C	DPDT	30A	120VAC	295	9.5VA
20249-82	900-1C	DPST-NO	30A	24VDC	290	2W




L = 1-15/16
W = 1-15/16
H = 3-1/4

General purpose magnetic latching plug-in relay. Positive snap-action, one-piece armature eliminates interconnections. Standard 8-pin octal-type plug for SPDT, 11-pin for DPDT. Recommended receptacles: Amphenol 77MIP Series, or equivalent.

105ML SERIES

Stock No.	Series	Contacts		Coil		
		Arrang.	Rating (Amps)	Input Voltages	Resistance (Ohms)	Nominal Power
20034-83	105ML	SPDT	10A	120VAC	1,850	3.5VA
20035-83	105ML	DPDT	10A	120VAC	1,850	3.5VA
20037-82	105ML	SPDT	10A	24VDC	315	2W
20038-82	105ML	DPDT	10A	24VDC	315	2W

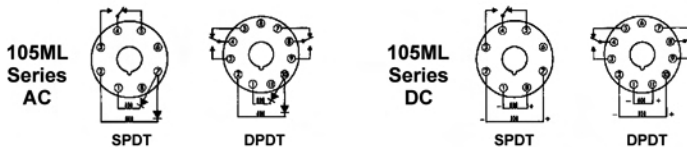


L = 1-13/32
W = 1-1/2
H = 2-3/16



Latching relays especially suited for AC power supplies. Units have moisture and fungus resistant Class F encapsulated coil. Recognized under the Components Program of Underwriters Laboratories, Inc. (File No. E37066).

166ML SERIES

Stock No.	Series	Contacts		Coil		
		Arrang.	Rating (Amps)	Input Voltages	Resistance (Ohms)	Nominal Power
20525-84	166ML	DPDT	10A	120VAC	1,850	4VA

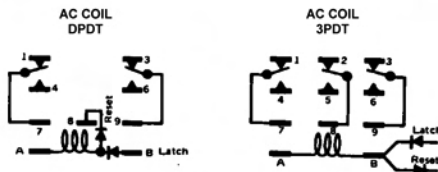

Diodes are Externally Wired and Supplied by Customer. Type 1N4005 or Equivalent Recommended. 3PDT Only.

WIRING DIAGRAMS FOR 166ML SERIES

ALL DIMENSIONS ARE NOMINAL.