


SERIES 750
DPDT, 3PDT OCTAL STYLE POWER RELAY

7

**R
E
L
A
Y
S**

OUTLINE DIMENSIONS

SOLDER/PLUG-IN TERMINAL STYLE
 DIMENSIONS SHOWN IN INCHES & (MILLIMETERS).

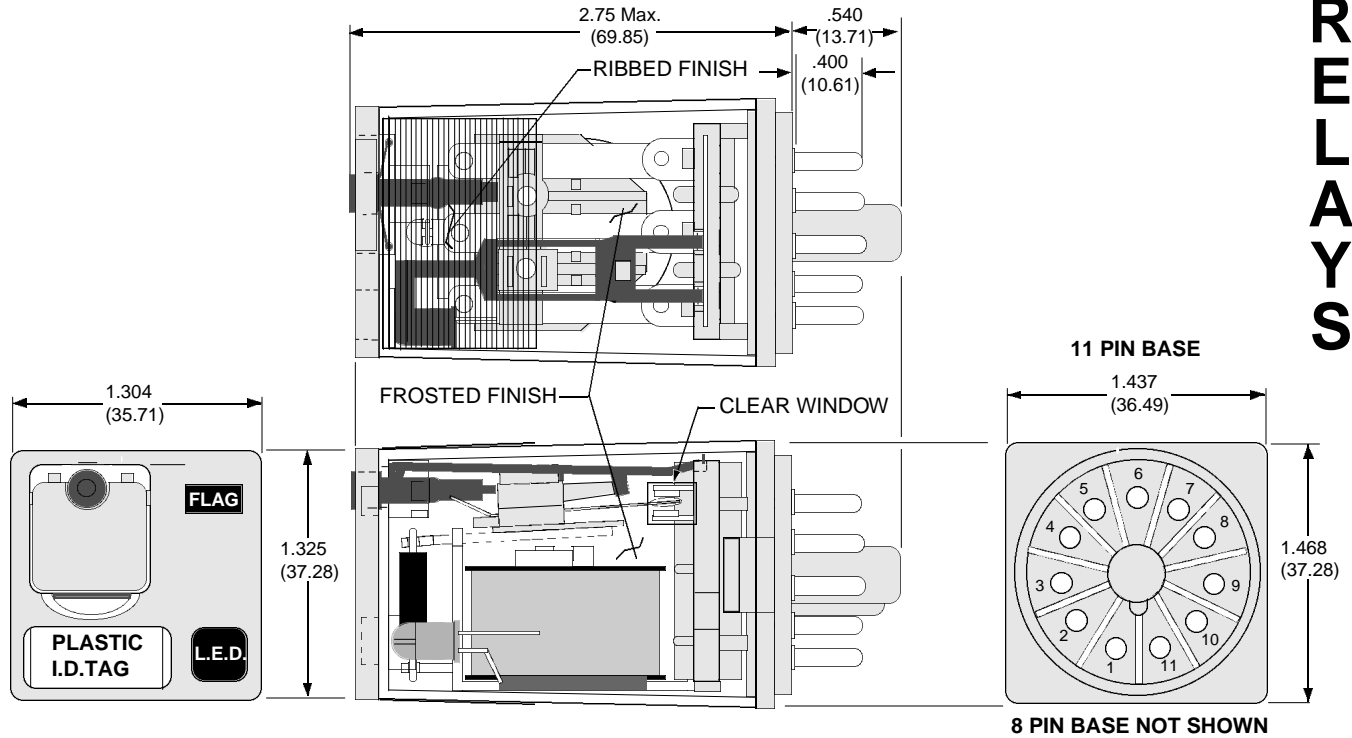

GENERAL SPECIFICATIONS

Coil Pull-in: DC - 80%, AC - 85% of nominal voltage.
 Coil Dropout: 10% of nominal or more.
 Insulation System: Class "B" (130°C per UL std. 1446).
 Maximum Coil dissipation: DC coils - 3 Watts.

Contacts: Silver Cadmium Oxide, Gold flashed.
 Contact Rating:
 DPDT - 12Amp, 120/240 VAC,
 3PDT - 10Amp, 120/240VAC, 50/60Hz, 28 VDC.

Dielectric withstanding Voltage
 Across Open Contacts: 500 V rms
 Between Current Carrying Parts: 1500 V rms

Temperature
 Operating: (AC) -45°C - +55°C, (DC) -45°C - +70°C

Terminals: 8 or 11 Pin Octal Style.
 Enclosure: Polycarbonate dust cover.

WIRING DIAGRAM

VIEWED FROM PIN END

