




SELECTION TABLE - 600 Volts, 50/60 Hertz (Open Type)

Select Guard-AC line/load reactors based upon motor horsepower, [or kilowatts] and voltage. Verify that the drive and motor continuous current rating is within the fundamental current rating of the reactor.

RATINGS	HP/kw	1/75	15/1.1	2/1.5	3/2.2	5/3.7	7.5/5.5	10/7.5	15/11	20/15	25/18.5	30/22	40/30
208 VOLTS 50/60 HZ	3% Impedance	RL-00401	RL-00801	RL-00801	RL-01201	RL-01801	RL-02501	RL-03501	RL-04501	RL-05501	RL-08001	RL-10001	RL-13001
	5% Impedance	RL-00402	RL-00802	RL-00802	RL-01202	RL-01802	RL-02502	RL-03502	RL-04502	RL-05502	RL-08002	RL-10002	RL-13002
	Amperes (Fundamental)	4	8	8	12	18	25	35	45	55	80	100	130
240 VOLTS 50/60 HZ	3% Impedance	RL-00401	RL-00801	RL-00801	RL-01201	RL-01801	RL-02501	RL-03501	RL-04501	RL-05501	RL-08001	RL-08001	RL-10001
	5% Impedance	RL-00402	RL-00802	RL-00802	RL-01202	RL-01802	RL-02502	RL-03502	RL-04502	RL-05502	RL-08002	RL-08002	RL-10002
	Amperes (Fundamental)	4	8	8	12	18	25	35	45	55	80	80	100
380 VOLTS 50/60 HZ	4% Impedance	RL-00201	RL-00403	RL-00403	RL-00803	RL-01203	RL-01803	RL-01802	RL-02502	RL-03503	RL-04502	RL-04502	RL-08002
415 VOLTS	4% Impedance	RL-00202	RL-00404	RL-00403	RL-00804	RL-00802	RL-01202	RL-01803	RL-02502	RL-03503	RL-03502	RL-04502	RL-05502
480 VOLTS 50/60 HZ	3% Impedance	RL-00201	RL-00201	RL-00402	RL-00402	RL-00802	RL-01202	RL-01802	RL-02502	RL-03502	RL-03502	RL-04502	RL-05502
	5% Impedance	RL-00202	RL-00202	RL-00403	RL-00403	RL-00803	RL-01203	RL-01803	RL-02503	RL-03503	RL-03503	RL-04503	RL-05503
	Amperes (Fundamental)	2	2	4	4	8	12	18	25	35	35	45	55
600 VOLTS 50/60 HZ	3% Impedance	RL-00202	RL-00202	RL-00403	RL-00403	RL-00803	RL-00802	RL-01202	RL-01802	RL-02502	RL-02502	RL-03502	RL-04502
	5% Impedance	RL-00203	RL-00203	RL-00404	RL-00404	RL-00804	RL-00803	RL-01203	RL-01803	RL-02503	RL-02503	RL-03503	RL-04503
	Amperes (Fundamental)	2	2	4	4	8	8	12	18	25	25	35	45

- For higher or lower current ratings, consult distributor.
- For other voltages or frequencies, consult distributor.
- Single phase reactors are also available, consult distributor for proper selection.
- Custom or modified reactors are available to meet specific requirements for special applications such as harmonic filters. Consult distributor for assistance.

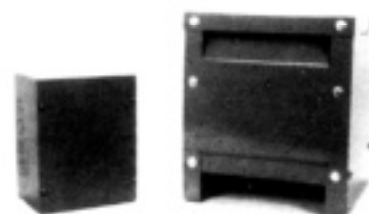

NEMA 1 CABINETS