

SERIES 788 DPDT, 3PDT PLUG-IN POWER RELAY

RELAY PART NUMBERS

PART NUMBERS FOR DPDT

PART NUMBERS	Coil measured @ 25°C	
	Nominal Input Voltage	Nominal Resistance (Ohms)
AC COIL - SOLDER/PLUG-IN TERMINALS		
788XBXCM4L-24A	24 VAC, 50/60 Hz	72 Ω
788XBXCM4L-120A	120 VAC, 50/60Hz	1,700 Ω
788XBXCM4L-220/230A	220/230 VAC, 50 Hz	9,100 Ω
788XBXCM4L-240A	240 VAC, 50/60HZ	9,100 Ω
AC COIL - PRINTED CIRCUIT TERMINALS		
788XBXTCM4L-24A	24 VAC, 50/60 Hz	72 Ω
788XBXTCM4L-120A	120 VAC, 50/60Hz	1,700 Ω
788XBXTCM4L-220/230A	220/230 VAC, 50 Hz	9,100 Ω
788XBXTCM4L-240A	240 VAC, 50/60HZ	9,100 Ω
DC COIL - SOLDER/PLUG-IN TERMINALS		
788XBXCM4L-110D	110 VDC	10,000 Ω
788XBXCM4L-24D	24 VDC	470 Ω
788XBXCM4L-12D	12 VDC	120 Ω
DC COIL - PRINTED CIRCUIT TERMINALS		
788XBXTCM4L-110D	110 VDC	10,000 Ω
788XBXTCM4L-24D	24 VDC	470 Ω
788XBXTCM4L-12D	12 VDC	120 Ω

PART NUMBERS FOR 3PDT

PART NUMBERS	Coil measured @ 25°C	
	Nominal Input Voltage	Nominal Resistance (Ohms)
AC COIL - SOLDER/PLUG-IN TERMINALS		
788XCXCM4L-24A	24 VAC, 50/60 Hz	72 Ω
788XCXCM4L-120A	120 VAC, 50/60Hz	1,700 Ω
788XCXCM4L-220/230A	220/230 VAC, 50 Hz	9,100 Ω
788XCXCM4L-240A	240 VAC, 50/60HZ	9,100 Ω
AC COIL - PRINTED CIRCUIT TERMINALS		
788XCXTCM4L-24A	24 VAC, 50/60 Hz	72 Ω
788XCXTCM4L-120A	120 VAC, 50/60Hz	1,700 Ω
788XCXTCM4L-220/230A	220/230 VAC, 50 Hz	9,100 Ω
788XCXTCM4L-240A	240 VAC, 50/60HZ	9,100 Ω
DC COIL - SOLDER/PLUG-IN TERMINALS		
788XCXCM4L-110D	110 VDC	10,000 Ω
788XCXCM4L-24D	24 VDC	470 Ω
788XCXCM4L-12D	12 VDC	120 Ω
DC COIL - PRINTED CIRCUIT TERMINALS		
788XCXTCM4L-110D	110 VDC	10,000 Ω
788XCXTCM4L-24D	24 VDC	470 Ω
788XCXTCM4L-12D	12 VDC	120 Ω

STANDARD PART NUMBERS SHOWN ABOVE.

ORDERING CODE

788 XBX CM4L -120A

Series _____
 Enclosed Power relay with flag indicator, & I.D. tag

Contact Arrangement: _____
 XBX (DPDT)
 XCX (3PDT)

Terminal style: _____
 Solder/plug-in (Blade) terminals - No Code
 Printed Circuit terminals - Code - T

Standard Features: Push Button & Lock down door, L.E.D. Lamp Indicator.

Coil Voltage: _____
 6, 12, 24, 120, 220/230, 240 Add "A" for VAC Coils
 6, 12, 24, 48, 110 Add "D" for VDC Coils




Other coil voltages available on special order.


MATING SOCKETS

SOCKET PART NUMBERS LISTED BELOW.


RATED: 15 AMPS, 300 VAC



70-463-1 11 PIN SCREW TERMINAL
DIN/PANEL MOUNT.



70-124-1 .130" SOLDER TERMINALS.
70-124-2 .187" Q.C. TERMINALS.

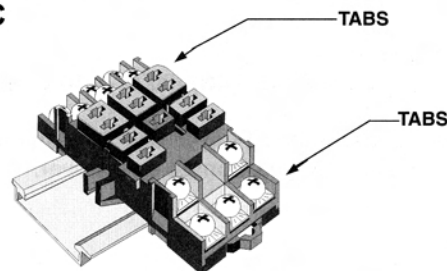

70-178-1 P.C. TERMINAL.
70-178-2 P.C. TERMINAL (NO TABS).