

ENCLOSED FLANGE MOUNT POWER RELAY


CLASS
389 & 298

CLASS 389 & 298 RELAY

1/4" MALE TAB TERMINALS FOR
USE WITH FEMALE QUICK CONNECT
TERMINALS OR SUITABLE FOR SOLDERING


OUTLINE DIMENSIONS

Dimensions shown are in INCH and (Millimeter)

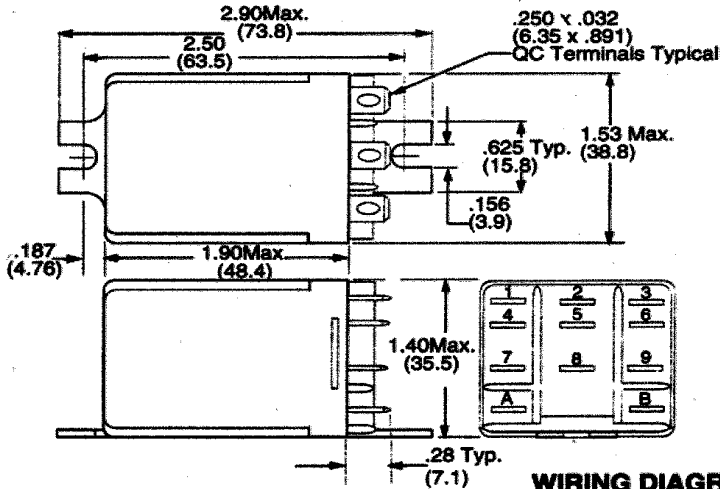

WIRING DIAGRAM

Viewed from terminal end

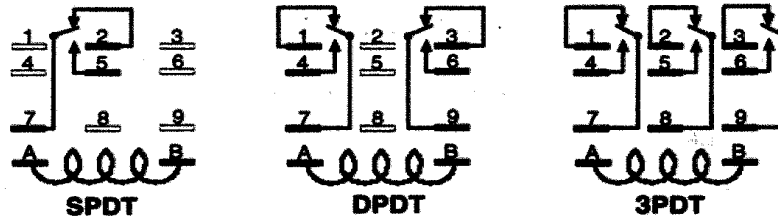

Magnecraft STRUTHERS-DUNN DUAL MARKED PART NUMBERS FLANGE STYLE		CONTACT CONFIGURATION	CONTACT RATING	COIL Measured @ 25°C		
				NOMINAL INPUT VOLTAGE	NOMINAL RESISTANCE (OHMS)	NOMINAL POWER
AC OPERATED						
W389ACX-4	298XAXC1-120A	SPDT	25 AMP	120 VAC	-	2.75VA
W389ACX-8	298XBXC1-24A	DPDT	25 AMP	24VAC	-	2.75VA
W389ACX-9	298XBXC1-120A	DPDT	25 AMP	120 VAC	-	2.75VA
W389ACX-10	298XBXC1-240A	DPDT	25 AMP	240 VAC, 60 Hz 220 VAC, 50 Hz	-	2.75VA
W389ACX-14	298XCXC1-120A	3PDT	20 AMP	120 VAC	-	2.75VA
W389ACX-15	298XCXC1-240A	3PDT	20 AMP	240 VAC, 60 Hz 220 VAC, 50 Hz	-	2.75VA
W389ADCX-4		SPST-NO-(DM)	30 AMP	120 VAC	-	2.75VA
W389ADCX-5		SPST-NO-(DM)	30 AMP	240VAC, 60Hz 220 VAC, 50Hz	-	2.75VA
W389ADZCX-3		SPDT-NO-NC (DM-DB)	30 AMP	24 VAC	-	3.75VA
W389ADZCX-4		SPDT-NO-NC (DM-DB)	30 AMP	120VAC	-	3.75VA
DC OPERATED						
W389CX-2	298XAXC1-12D	SPDT	25 AMP	12 VDC	100	1.44W
W389CX-3	298XAXC1-24D	SPDT	25 AMP	24 VDC	400	1.44W
W389CX-7	298XBXC1-12D	DPDT	25 AMP	12VDC	100	1.44W
W389CX-8	298XBXC1-24D	DPDT	25 AMP	24VDC	400	1.44W
W389CX-12	298XCXC1-12D	3PDT	20 AMP	12 VDC	100	1.44W
W389CX-13	298XCXC1-24D	3PDT	20 AMP	24 VDC	400	1.44W
W389DCX-2		SPST-NO-(DM)	30 AMP	12 VDC	100	1.44W
W389DCX-3		SPST-NO-(DM)	30 AMP	24 VDC	400	1.44W
W389DCZX-2		SPDT-NO-NC (DM-DB)	30 AMP	12 VDC	100	1.44W
W389DCZX-3		SPDT-NO-NC (DM-DB)	30 AMP	24VDC	400	1.44W