
Please contact us about TÜV certified products.

NAiS

AQ-C SOLID STATE RELAY

AQ-C RELAYS



mm inch

FEATURES

- **Compact DIL type: 20 mm (length) × 10 mm (width) × 12.8 mm (height) (.787×.394×.504 inch)**
- **Excellent in noise resistance**
- **Snubber circuit integrated**
- **High dielectric strength: 2,500 V between input and output**
- **Reverse polarity type available**

TYPES

1. Input module

Type	Output voltage	Input voltage	Part No.
AC input	4 to 32 V DC	80 to 250 V AC	AQCD3-IM 100/240 V AC
DC input	4 to 32 V DC	3 to 32 V DC	AQCD3-IM 4/24 V DC

2. Output module

Type	Load voltage	Input voltage	Part No.
AC output Zero-cross	75 to 125 V AC	5 V DC	AQC1A1 - ZT5 V DC
		12 V DC	AQC1A1 - ZT12 V DC
		24 V DC	AQC1A1 - ZT24 V DC
	75 to 250 V AC	5 V DC	AQC1A2 - ZT5 V DC
		12 V DC	AQC1A2 - ZT12 V DC
		24 V DC	AQC1A2 - ZT24 V DC
AC output Non Zero-cross	75 to 125 V AC	5 V DC	AQC1A1 - T 5 V DC
		12 V DC	AQC1A1 - T 12 V DC
		24 V DC	AQC1A1 - T 24 V DC
	75 to 250 V AC	5 V DC	AQC1A2 - T 5 V DC
		12 V DC	AQC1A2 - T 12 V DC
		24 V DC	AQC1A2 - T 24 V DC
DC output	3 to 60 V DC	5 V DC	AQC1AD1- 5 V DC
		12 V DC	AQC1AD1- 12 V DC
		24 V DC	AQC1AD1- 24 V DC

ORDERING INFORMATION

AQC [1A] [D1] — [ZT] [5VDC] — [R]

Load current	Load voltage	Type	Input voltage	Input polarity
Nil: Input module 1A: Output module	1: 75 to 125 V AC (Output module) 2: 75 to 250 V AC (Output module) D1: 3 to 60 V DC (Output module) D3: 4 to 32 V DC (Input module)	Nil: DC output IM: Input module T: AC output Non Zero-cross ZT: AC output Zero-cross	Output module: 5, 12, 24 V DC Input module: 4/24 V DC, 100/240 V AC	Nil: Standard polarity R: Reverse polarity (Only for output module)

Standard packing: Carton: 50 pcs.; Case: 500 pcs.

SPECIFICATIONS

Rating [at 20°C 68°F; Input voltage ripple (output module) and output voltage ripple (input module): max. 1%]

1. Input module

Item \ Type		AC input AQCD3-M 100/240 V AC	DC input AQCD3-IM 4/24 V DC	Remarks
Input side	Input voltage	80 to 250 V AC	3 to 32 V DC	
	Input current	Max. 5 mA	Max. 5 mA	
	Pick-up voltage	Max. 80 V AC	Max. 3 V DC	
	Drop-out voltage	Min. 10 V AC	Min. 1 V DC	
Output side	Load voltage	4 to 32 V DC	4 to 32 V DC	
	Load current	0.1 to 25 mA	0.1 to 25 mA	
	Max. "OFF-state" leakage current	Max. 5μA	Max. 5μA	When 32 V DC applied
	Max. "ON-state" voltage drop	Max. 1.6 V	Max. 1.6 V	at max. carrying current

All Rights Reserved © COPYRIGHT Matsushita Electric Works, Ltd.

2. Output module

(1) AC output type

Item		Type	AQC1A1-ZT5VDC / AQC1A1-T5VDC	AQC1A1-ZT12VDC / AQC1A1-T12VDC	AQC1A1-ZT24VDC / AQC1A1-T24VDC	AQC1A2-ZT5VDC / AQC1A2-T5VDC	AQC1A2-ZT12VDC / AQC1A2-T12VDC	AQC1A2-ZT24VDC / AQC1A2-T24VDC	Remarks
Input side	Input voltage		(5 V type) 4 to 6 V DC	(12 V type) 9.6 to 14.4 V DC	(24 V type) 21.6 to 26.4 V DC	(5 V type) 4 to 6 V DC	(12 V type) 9.6 to 14.4 V DC	(24 V type) 21.6 to 26.4 V DC	See "Data 3".
	Input impedance (Approx.)		0.3 k Ω	0.8 k Ω	1.8 k Ω	0.3 k Ω	0.8 k Ω	1.8 k Ω	
	Drop-out voltage, min		0.5 V	1.2 V	2.4 V	0.5 V	1.2 V	2.4 V	
Load side	Max. load current		1 A						See "Data 1". Ta = Min. 40°C
	Load voltage		75 to 125 V AC			75 to 250 V AC			
	Non-repetitive surge current		20 A						See "Data 2". In one cycle at 60 Hz
	Max. "OFF-state" leakage current		0.6 m A (When 100 V AC applied)			1.1 m A (When 200 V AC applied)			at 60 Hz
	Max. "ON-state" voltage drop		1.6 A						at max. carrying current
	Min. load current		10 mA			20 mA			

(2) DC output type

Item		Type	AQC1AD1-5VDC	AQC1AD1-12VDC	AQC1AD1-24VDC	Remarks
Input side	Input voltage		(5 V type) 4 to 6 V DC	(12 V type) 9.6 to 14.4 V DC	(24 V type) 21.6 to 26.4 V DC	See "Data 3".
	Input impedance (Approx.)		430 Ω	1.2 k Ω	2.8 k Ω	
	Drop-out voltage, min		0.8 V			
Load side	Max. load current		1 A			See "Data 1". Ta = Min. 40°C
	Load voltage		3 to 60 V DC			
	Non-repetitive surge current		1.5 A			See "Data 2". at 1s
	Max. "OFF-state" leakage current		0.1 m A (When 60 V DC applied)			
	Max. "ON-state" voltage drop		1.6 V			at max. carrying current
	Min. load current		1 mA			

Characteristics [at 20°C 68°F; Input voltage ripple (output module) and output voltage ripple (input module): max. 1%]

Input module

Item		Type	AC Input	DC Input	Remarks
Operate time, max.			20 ms	0.5 ms	Input voltage: 24 V DC or 100V AC Output voltage: 24 V DC Output current: 25mA
Release time, max			20 ms	0.5 ms	
Insulation resistance, min.			10^9 Ω between input and output		at 500 V DC
Breakdown voltage			2,500 Vrms between input and output		For 1 minute
Vibration resistance	Functional		10 to 55Hz double amplitude of 3 mm		10 minutes for X,Y, Z, axis
	Destructive		10 to 55Hz double amplitude of 3 mm		1 hour for X,Y, Z, axis
Shock resistance	Functional		Min. 980 m/s² {100 G}		4 time each for X,Y,Z axis
	Destructive		Min. 980 m/s² {100 G}		5 time each for X,Y,Z axis
Ambient temperature			–30°C to +80°C –22°F to +176°F		
Storage temperature			–30°C to +100°C –22°F to +212°F		

Output module

Item		Type	AC output		DC output	Conditions
			Non zero-cross	Zero-cross		
Operate time, max.			1 ms	(1/2 cycle of voltage sine wave)+1ms	0.5 ms	
Release time, max.			(1/2 cycle of voltage sine wave)+1ms		1 ms	
Insulation resistance, min.			10^9Ω between input and output			at 500 V DC
Breakdown voltage			2,500 Vrms between input and output			For 1 minute
Vibration resistance	Functional		10 to 55Hz double amplitude of 3 mm			10 minutes for X,Y, Z, axis
	Destructive		10 to 55Hz double amplitude of 3 mm			1 hour for X,Y, Z, axis
Shock resistance	Functional		Min. 980 m/s² {100 G}			4 time each for X,Y,Z axis
	Destructive		Min. 980 m/s² {100 G}			5 time each for X,Y,Z axis
Ambient temperature			–30°C to +80°C –22°F to +176°F			
Storage temperature			–30°C to +100°C –22°F to +212°F			
Operational method			Random Turn-ON, Zero-cross Turn-OFF	Zero-cross (Turn-ON and Turn-OFF)	—	


All Rights Reserved © COPYRIGHT Matsushita Electric Works, Ltd.


DIMENSIONS

mm inch


1. Input module (AC, DC)








PC board pattern (Copper-side view)

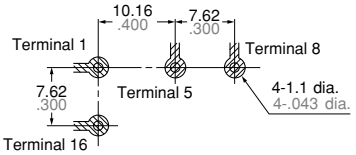


Tolerance: ±0.1 ±.004

AC input	DC input
⑤···Output: DC–	⑤···Output: DC–
⑧···Output: DC+	⑧···Output: DC+
⑯···Input: AC	⑯···Input: DC+
①···Input: AC	①···Input: DC–
Case color: Yellow	Case color: White



General tolerance: ±0.5 ±.020


Schematic

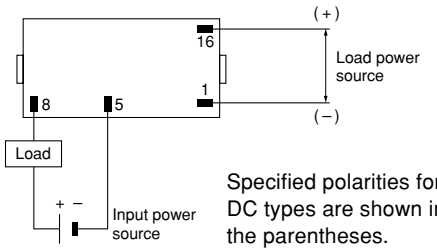


Specified polarities for DC types are shown in the parentheses.


2. Output module (AC, DC)








PC board pattern (Copper-side view)

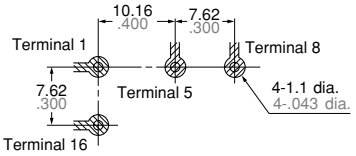


Tolerance: ±0.1 ±.004

AC output	DC output
⑤···Output: AC	⑤···Output: DC–
⑧···Output: AC	⑧···Output: DC+
⑯···Input: DC+	⑯···Input: DC+
①···Input: DC–	①···Input: DC–
Case color: Black	Case color: Red



General tolerance: ±0.5 ±.020

Schematic

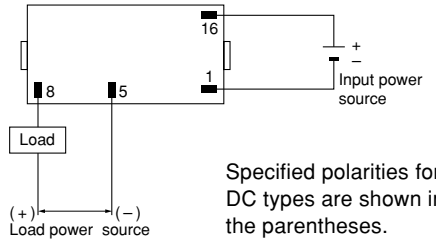

Specified polarities for DC types are shown in the parentheses.


ACCESSORY




PCIA-PS

REFERENCE DATA


1. Load current vs. ambient temperature

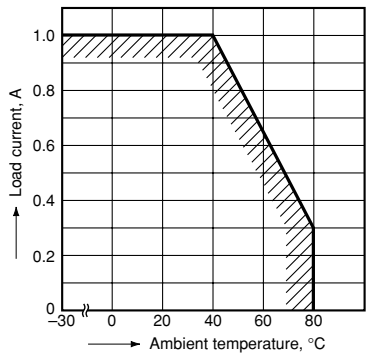

2.-(1) Non-repetitive surge current vs. carrying time (AC output)

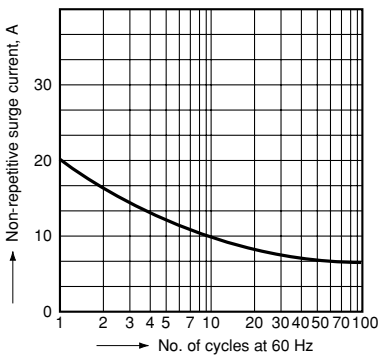


2.-(2) Non-repetitive surge current vs. carrying time (DC output)

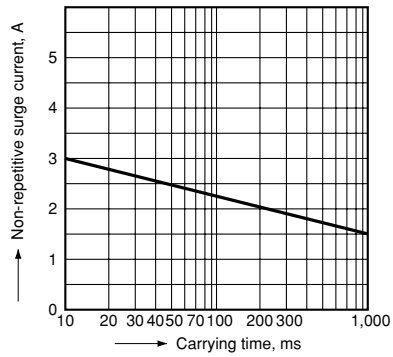


All Rights Reserved © COPYRIGHT Matsushita Electric Works, Ltd.


3. Input current vs. input voltage characteristics (AC/DC output)

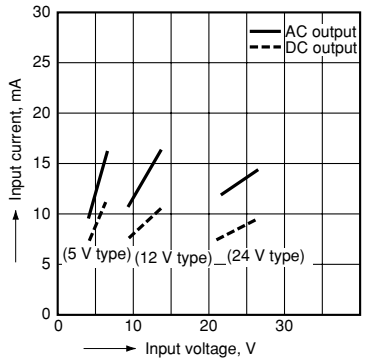


4.-(1) Input current vs. input voltage characteristics (AC input)
Tested sample: AQCD3-IM100/240 V AC, 5 pcs.

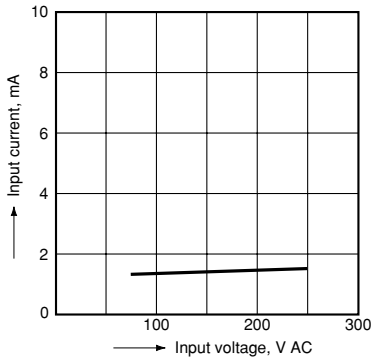

4.-(2) Input current vs. input voltage characteristics (DC input)
Tested sample: AQCD3-IM4/24 V DC

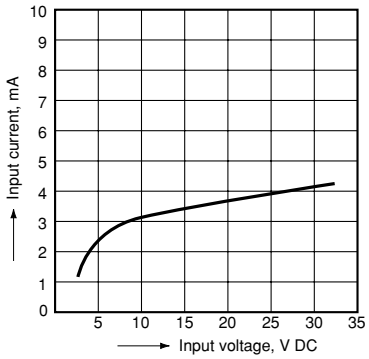


5. Load current vs. ambient temperature characteristics for adjacent mounting

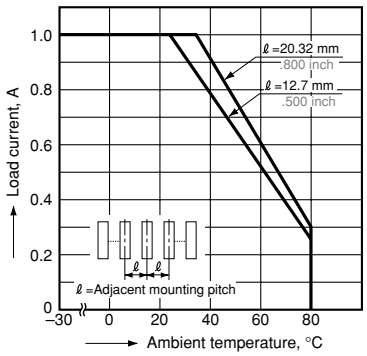


NOTE

When used for the load less than rated
In the case of the load current less than rated, malfunction may result from the residual voltage across the both ends of the load even if the solid state relay is turned off.
Use a dummy resistor as a countermeasure.
The total of the current through the resistor and the load current must exceed the min. rated load current.

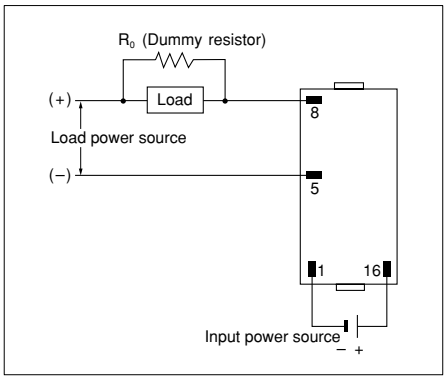

In case the dummy resistor is not used, keep in mind that the residual voltage becomes as follows:
Example:
For the inductive load by the 5 mA load current and the 200 V AC load voltage, the load impedance becomes 40 kW and Ve/V = 16% is estimated from the below graph.
Accordingly, the 32 V voltage remains across the both ends of the load when the solid state relay is turned off.
• Characteristics of residual voltage vs. load impedance

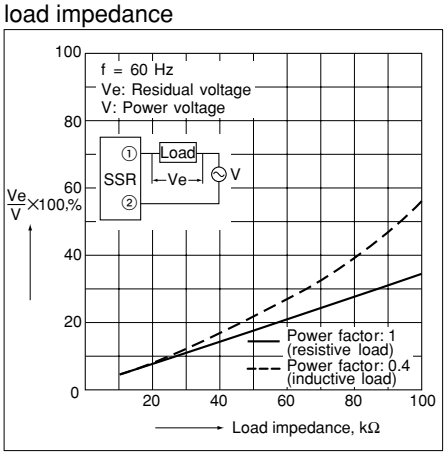

For Cautions for Use

All Rights Reserved © COPYRIGHT Matsushita Electric Works, Ltd.