

7 RELAYS

ORDERING INFORMATION

| | | | | | | | | | |
|--------------------|------------|----------|-----------|----------|----------|----------|----------|----------|-------------|
| Typical Part No. > | P30 | P | 42 | A | 1 | 4 | P | 1 | -240 |
|--------------------|------------|----------|-----------|----------|----------|----------|----------|----------|-------------|


- TYPE:**
P30 = Definite Purpose Contactor, 30 amp.
P40 = Definite Purpose Contactor, 40 amp.
- AUXILIARY SWITCH:**
P = No Aux. Switch
C = 1 Form C (SPDT) F = 2 Form C (DPDT)
- MAIN CONTACT ARRANGEMENT:**
42 = 3 Form X (3PST-NO-DM) 46 = 3 Form Y (3PST-NC-DB)
43 = 2 Form X (DPST-NO-DM) 47 = 4 Form X (4PST-NO-DM)
 & 1 Form Y (SPST-NC-DB) 48 = 2 Form X (DPST-NO-DM)
 & 2 Form Y (DPST-NC-DB) 49 = 4 Form Y (4PST-NC-DB)
44 = 2 Form X (DPST-NO-DM) Other contact arrangements are available.
45 = 1 Form X (SPST-NO-DB) & 2 Form Y (DPST-NC-DB)
- COIL CONTROL INPUT:**
A = Alternating Current, 50/60 Hz. D = Direct Current
- MOUNTING AND INSTALLED ACCESSORIES:**
1 = Standard Mounting
- MAIN CONTACT TERMINALS:**
2 = Screw Terminals 4 = Box Lug
3 = Screw Terminals & Dual .250" (6.35 mm) Quick Connect 5 = Captive Pressure Plate
 **Order separately any hardware which is to be bulk packed. 6 = Box Lug & Dual .250" (6.35 mm) Quick Connect
- AUXILIARY CONTACT TERMINALS:**
P = No Auxiliary Switch
C = .187" (4.75 mm) Quick Connect
D = .250" (6.35 mm) Quick Connect
- COIL TERMINALS:**
1 = Combination 8-32" Screw Terminal and .250" (6.35 mm) Quick Connect
- COIL VOLTAGE:**
24, 120, 240, VAC
12, 24, 120 VDC

STOCK ITEMS - The following items are normally maintained in stock for immediate delivery.

| | |
|-----------------|-----------------|
| P30P42A12P1-120 | P40C42A12D1-120 |
| P30P42D12P1-24 | P40P42A12P1-24 |
| P30P47A12P1-120 | P40P42A12P1-120 |
| P30P47D12P1-24 | P40P42A12P1-240 |
| | P40P42D12P1-24 |

OUTLINE DIMENSIONS

3 POLE MODELS

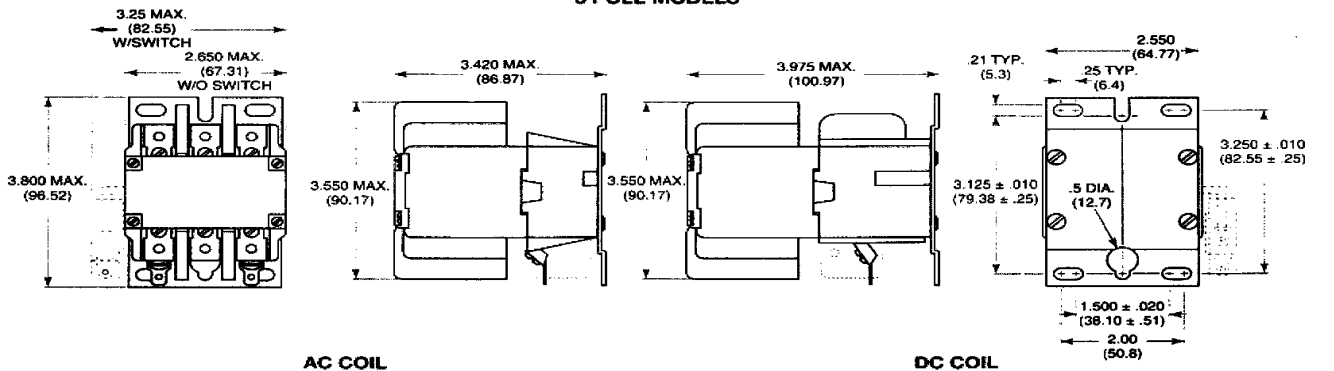

4 POLE MODELS

