



812H

FEATURES

- Sub-Miniature, 7-12 amps
- UL, CSA , & TUV
- UL Class B Insulation System optional
- TV-5, SPNO
- Flux-tight or Sealed
- Versatile, high performance, small package

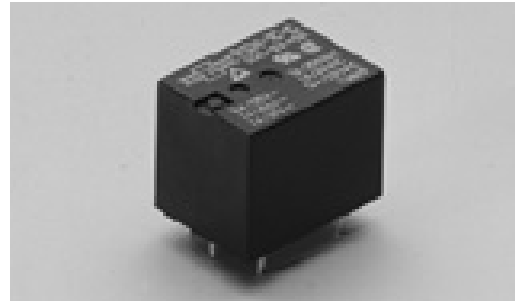

ORDERING INFORMATION

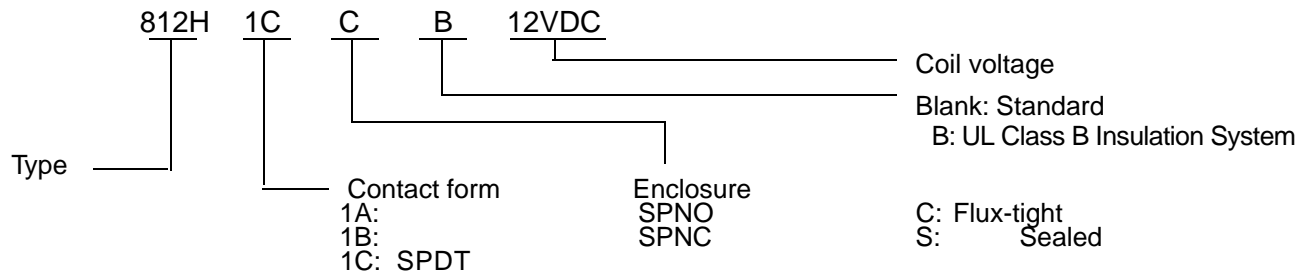

SAFETY APPROVAL

Certified	UL	CSA	TUV
File No.	E88991	LR90143	R9452021

SAFETY APPROVAL RATING

	UL	CSA	TUV
	12A 125VAC	12A 125VAC	7A 250V~(AC)
	7A 277VAC/30VDC	7A 250VAC/30VDC	10A 125V~(AC)
	1/4 HP, 125/250VAC (N.O.)		7A 30V =(DC)
	1/8HP, 125/250VAC (N.C.)		
	TV-5 (1A)		

COIL DATA (DC)

Rated voltage (V)	Rated current ± 10 % at 25° (mA)	Coil resistance ± 10 % at 25° ()	Max. continuous voltage 25°C	Pick up voltage (Max) 25°C	Drop out voltage (Min) 25°C	Power consumption at rated voltage
3	120	25	110% of rated voltage	75% of rated voltage	10% of rated voltage	approx. 0.36W
4	90	44				
5	73	69				
6	60	100				
9	40	225				
12	30	400				
18	20	900				
24	15	1600				
48	7.5	6400				