

832/832A

7


RELAYS

SPECIFICATION

Contact resistance	50m Max. (initial value)	
Operate time	15ms Max.	
Release time	10ms Max.	
Insulation resistance	100M Min. (DC 500V)	
Dielectric strength	Between open contact	1500V ms, 50/60Hz 1 min.
	Between contact and coil	832: 1500Vrms 50/60Hz 1 min.
		832A High dielectric strength type: 4000Vrms 50/60Hz 1 min.
Vibration resistance	Operating extremes	10~50Hz, amplitude 1.5mm
	Damage limits	>10~50Hz, amplitude 1.5mm
Shock resistance	Operating extremes	>10G
	Damage limits	>20G
Life expectancy	Mechanical	>10,000,000 operations (frequency 18,000 operations/hr)
	Electrical	>100,000 operations (frequency 1,200 operations/hr)
Operating temperature	-55° ~ 85° C (no freezing)	
Weight	Approx. 22g (open type), 27g (with cover)	

832 WIRING DIAGRAM

832A WIRING DIAGRAM

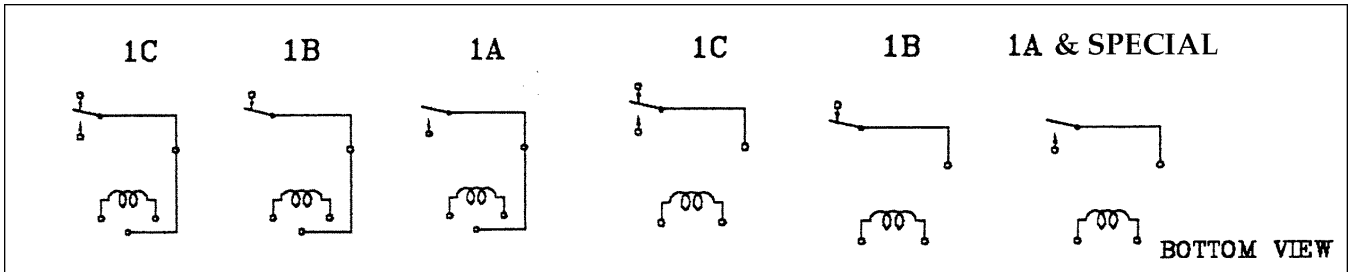

832 PC BOARD LAYOUT

832A PC BOARD LAYOUT

