
1 Description

The 9011, 9012 & 9117/H are compact versions of Coto's standard 9000 SIPs, with the 9011 and 9117/H using 65% less board space and the 9012 using 47% less board space (LxW). These miniature SIP relays are ideal for use in ATE applications and other high reliability test, measurement and telecommunications applications where high board density and long life are key requirements.

Device Packages

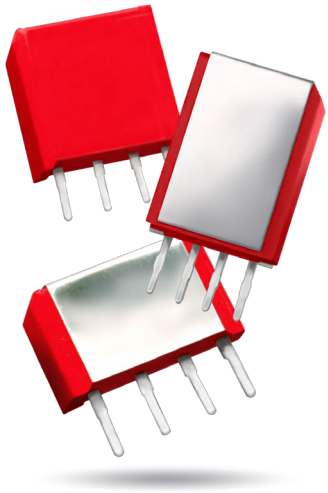

2 Features

- 9117/H is the smallest 3W SIP relay (.270" x .150" x .385") in 3W & 10W versions
- 9012 is a 10W SIP relay (.400" x .150" x .400")
- 9011 is a 3W SIP relay (.400" x .150" x .265")
- Magnetic shielding to reduce interaction
- Optional coil suppression diode – protects coil drive circuits
- UL File #E67117 - Contact factory for details
- High insulation resistance $10^{12}\Omega$ minimum
- High reliability, hermetically sealed contacts for long life
- High speed switching as compared to electromechanical relays
- Molded thermoset body on integral lead frame design
- RoHS compliant


3 Applications

- Automated Test Equipment (ATE)
- Instrumentation
- Telecommunications


4 Dimensions


In Inches (Millimeters)

Model 9011

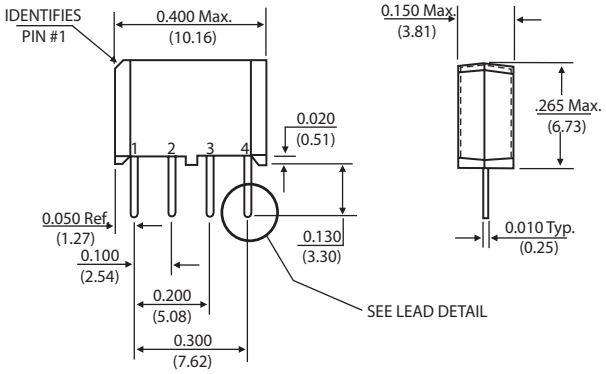


Schematic (9011 & 9012)






Lead Detail only applicable for models 9011 & 9012


Model 9012

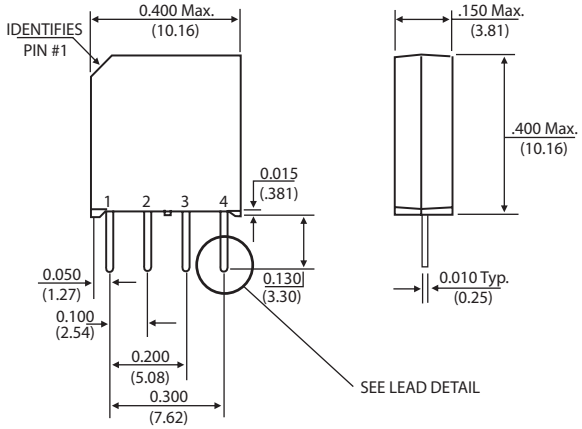

Model 9117/H

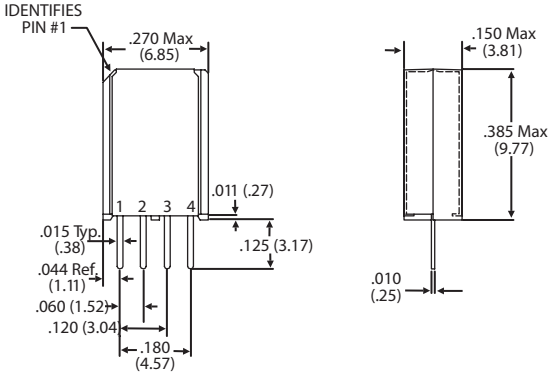

Schematic (9117/H)



5 Ordering Information

Part Number 90XX-XX-1XH

Model Number
9011 9012 9117

Coil Voltage
05=5 volts
12=12 volts (N/A on 9117)

Magnetic Shield
1=Mag Shield (External 9011, 9117/H; Internal 9012)

Version
H=High Power

General Options
0=No Diode
1=Diode[2]

Copyright 2025. All rights reserved.

6 Parameters - Model Number 9011, 9012 and 9117/H

Parameters	Test Conditions	Units	9011[2,3]	9012[2,3]	9117[2,3]	9117H[4]
Relay Configuration			**(3 Watt) 4 Pin SIP**	**(10 Watt) 4 PIN SIP**	**(3 Watt) Narrow Fit**	**(10 Watt) Narrow Fit High Power**
Coil Specs.						
Nom. Coil Voltage		VDC	5.0 12.0	5.0 12.0	5.0	
Max. Coil Voltage		VDC	6.5 15.0	6.5 15.0	6.0	
Coil Resistance	+/- 10%, 25°C	Ω	500 750	500 750	400	
Operate Voltage	Must Operate By	VDC - Max.	3.75 9.0	3.75 9.0	3.75	
Release Voltage	Must Release By	VDC - Min.	0.4 1.0	0.4 1.0	0.5	
Contact Ratings						
Switching Voltage	Max DC/Peak AC Resist.	Volts	100	200	100	170
Switching Current	Max DC/Peak AC Resist.	Amps	0.25	0.5	0.25	0.25
Carry Current	Max DC/Peak AC Resist.	Amps	0.5	1.0	0.5	1.0
Contact Rating	Max DC/Peak AC Resist.	Watts	3	10	3	10
Life Expectancy - Typical[1]	Signal Level 1.0V, 10mA	x 10^6 Ops.	250	1000	250	1000
Static Contact Resistance (Max. Init.)	50mV, 10mA	Ω	0.150	0.120	0.120	0.120
Dynamic Contact Resistance (Max. Init.)	0.5V, 50mA at 100Hz, 1.5msec.	Ω	0.200	0.200	0.200	0.200
Relay Specifications						
Insulation Resistance (Min.)	Between all Isolated Pins at 100V, 25°C, 40% RH	Ω	10^{12}	10^{12}	10^{12}	
Capacitance - Typical	Across Open Contacts Open Contact to Coil	pF	0.7 1.4	0.7 1.4	0.14 N/A	
Dielectric Strength (Min.)	Between Contacts Contacts/Shield to Coil	VDC/peak AC VDC/peak AC	200 1500	200 1500	200 1500	
Operate Time - Including Bounce - Typical	At Nominal Coil Voltage, 30Hz, Square Wave	msec.	0.35	0.35	0.2	
Release Time - Max.		msec.	0.1	0.1	0.1	

General Notes:

1. Consult factory for life expectancy at other switching loads. Resistance >0.50Ω defines end of life or failure to open.
2. Optional diode available. For models 9011 & 9012, the diode is connected to pin #2 (cathode) and pin #3 (anode).
   For models 9117 & 9117H, the diode is connected to pin #1 (cathode) and pin #2 (anode). Correct coil polarity must be observed.
3. Relays have a magnetic shield; external for models 9011, 9117 & 9117H, internal for model 9012.
4. Part number 9117-05-XXH is the high power, high reliability version of our traditional 9117 series.

Environmental Ratings:


Storage Temp: -35°C to +100°C; *Operating Temp:* -20°C to +85°C.
All electrical parameters measured at 25°C unless otherwise specified.
Vibration: 20 G's to 2000 Hz; *Shock:* 50 G's

Copyright 2025. All rights reserved.

7 Package Information

Plastic Tube Dimensions (9011, 9012 & 9117/H)

- 39 relays per tube when ordered as 9011-XX-XX & 9012-XX-XX
- 58 relays per tube when ordered as 9117-05-XX & 9117-05-XXH

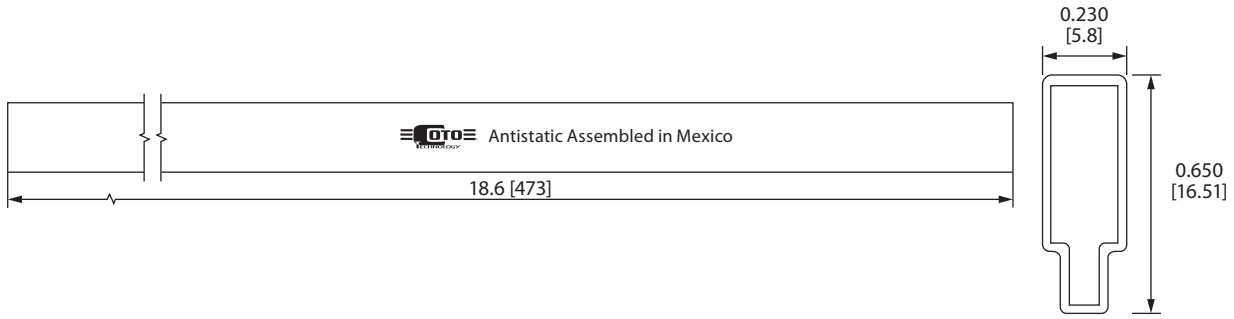

8 Relay Processing Notes

8.1 Soldering

Relays can be soldered by hand or by wave solder processing. Coto Technology recommends the maximum wave solder temperature (measured at the relay leads) as 270°C for 10 seconds. Temperature and time in excess of the recommended levels may result in damage to the relay. All our through-hole relays are compatible with either SAC alloy or eutectic soldering process.

8.2 Cleaning

9011, 9012, 9117 & 9117H relays are designed and manufactured to provide an adequate seal from external conditions. However, caution must be taken during the cleaning process not to expose the relays to conditions that will allow moisture to permeate into the package. Caution should be taken with dwell time between reflow and cleaning, high pressure spraying, and time in cleaning solvent/aqueous solutions, as these cleaning process parameters can contribute to moisture permeation. Board level bake out may be required after wash to remove moisture that has been introduced during cleaning operations.

8.3 Relay Storage

Relay parametric specifications are specified at 25°C and 40% RH. Reduced relay performance may result if storage or use environments significantly exceed these conditions. If high insulation resistance is required, Coto Technology recommends that relay storage, processing, and use environments are adequate to achieve the desired results. Relays should be stored in similar environmental conditions as other high-reliability active and passive electronic components. Proper storage of relays is also important to maintain solderability over an extended period of time.

8.4 Handling

Relays should be handled with care. Dropping or mishandling relays may result in damage that can contribute to a direct failure or, even worse, a latent field failure. If relays are dropped, Coto Technology recommends that they should be discarded.

Coto Technology does not recommend use of ultrasonic activated equipment with relays. The use of ultrasonic equipment may change the characteristics of the relay and can contribute to failure.

For more **technical and application information**,
please refer to the following QR code:

Copyright 2025. All rights reserved.

9 IMPORTANT NOTICE AND DISCLAIMER

COTO TECHNOLOGY, INC. ("COTO") PROVIDES THIS DATA SHEET "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS AND IMPLIED, WITH RESPECT TO INFORMATION SET FORTH HEREIN, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF ACCURACY, COMPLETENESS, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS. Your receipt of this data sheet constitutes your acknowledgement and acceptance of, and agreement to, all of the terms, conditions, notes, notices, disclaimers and limitations set forth herein.

This data sheet is subject to change without notice. Coto reserves the right to make, from time to time, changes to specifications set forth herein as may be necessary or desirable to improve the performance, reliability and/or manufacturability of the products described herein. As such, before placing an order of any Coto product described herein, you must verify that the information set forth herein is current with respect to such product, and Coto assumes no responsibility for any damages which you may incur due to your failure to do so.

Coto grants you permission to use this data sheet only for information and reference purposes, and any other use of this data sheet by you is prohibited. No license to any intellectual property right of Coto or any third party is granted hereunder.

You are solely responsible for (1) deciding whether to purchase or use any Coto product, (2) selecting appropriate Coto products for your application, (3) designing, validating and testing your application incorporating or involving any Coto product and (4) ensuring that such application meets applicable safety, security, regulatory or other requirements or standards. Any purchase or use of any Coto product must fully comply with all applicable laws and regulations, including, without limitations, import and export regulations.

Coto products described herein have been designed, developed and manufactured to be used in the standard commercial applications similar to those shown herein ("Specific Applications"). Any application requiring measures of reliability, robustness, safety or certifications not shown or beyond those shown herein is at the user's risk and is not warranted or guaranteed by Coto. Therefore, you are advised to use Coto products described herein only in Specific Applications.

Your purchase and use of Coto products, including, without limitation, those products described herein, are subject to Coto's terms and conditions of sale and other applicable terms available on Coto's website or otherwise provided or made available in conjunction with such products. Unless such terms and conditions state otherwise, COTO PRODUCTS ARE PROVIDED "AS IS" AND WITH ALL FAULTS, AND ANY AND ALL WARRANTIES, EXPRESS AND IMPLIED, WITH RESPECT TO SUCH PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS, ARE DISCLAIMED. Coto's provision of this data sheet does not expand or otherwise alter Coto's applicable warranties or warranty disclaimers for Coto products.

Coto disclaims responsibility for, and you will fully defend, indemnify and hold harmless Coto, its affiliates and its and their respective equity holders, directors, officers, employees, representatives, agents, successors and assigns against and for, any and all claims, damages, costs, losses and liabilities arising out of your use of this data sheet or your purchase or use of any Coto product described herein.

Copyright 2025. All rights reserved.