


855A

FEATURES

- Miniature, 20-30 amps
- UL, CSA
- Flange Mount or PCB types with quick connects
- UL 508/ UL873 Spacing
- UL Class F Insulation System optional
- Open-frame, flux-tight or sealed



ORDERING INFORMATION

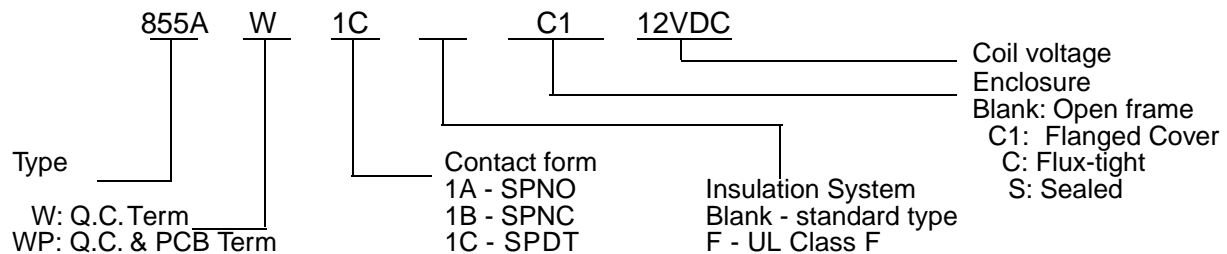

SAFETY APPROVAL

Certified	UL	CUR	TUV
File No.	Pending	Pending	

SAFETY APPROVAL RATING

1A	1B	1C
30A/240VAC/28VDC	15A/240VAC/28VDC	10A/20A/240VAC/28VDC

COIL DATA (DC)

Rated voltage (V)	Rated current ± 10 % at 25° (mA)	Coil resistance ± 10 % at 25° ()	Max.continuous voltage 25°C	Pick up voltage (Max) 25°C	Drop out voltage (Min) 25°C	Power consumption at rated voltage
5	185	27	110% of rated voltage	75% of rated voltage	10% of rated voltage	approx. 0.93W
6	150	40				
9	93	97				
12	77	155				
18	47	380				
24	36	660				
36	25	1,440				
48	19	2,560				
110	8	13,400				