



731

FEATURES

- General purpose, plug-in, 10 amps
- UL, CSA - CE
- 1, 2 or 3 pole
- Socket/Solder-lug or PCB terminals
- Push-to test, indicator light options
- AC/DC Coils
- Sockets available

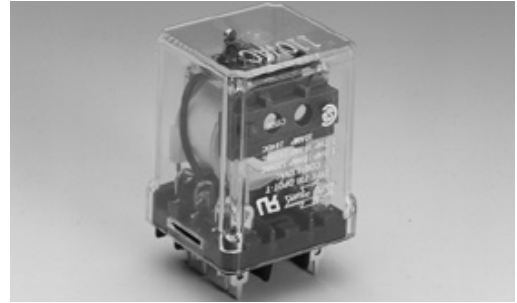

ORDERING INFORMATION

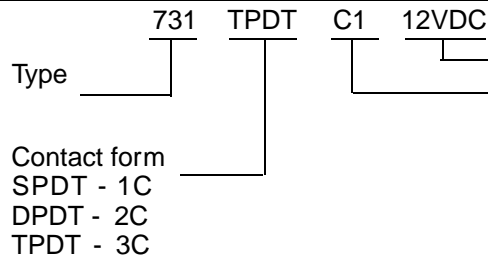

- Coil voltage
 Enclosure
 Blank: Open Frame
 C: Cover
 C1: Cover with Side Flange Mount
 C2: Tapped Mounting Hole (6-32) & Tab
 L: Lamp
 M: Push Button
 LM: Lamp & Push Button
 T: PCB terminal

SAFETY APPROVAL

Certified	UL	CSA	FIMKO
File No.	E88991	LR90143	193853-02

SAFETY APPROVAL RATING

	UL	CSA	FIMKO
	10A 240VAC/28VDC	10A 240VAC/28VDC	10A 250VAC
	1/3HP, 120VAC	1/3HP, 120VAC	
	1/2HP, 240VAC	1/2HP, 240VAC	

COIL DATA (DC)

Rated voltage (V)	Rated current ± 10 % at 25° (mA)	Coil resistance ± 10 % at 25° ()	Max. continuous voltage 25°C	Pick up voltage (Max) 25°C	Drop out voltage (Min) 25°C	Power consumption at rated voltage
6	188	32	100% of rated voltage	75% of rated voltage	10% of rated voltage	approx. 1.2W
12	100	120				
24	51	472				
48	27	1800				
110	11	10000				