


Micro<sup>3</sup> and Micro<sup>3</sup>C

PLC

11

CONTROLLERS & SENSORS

Micro<sup>3</sup>C

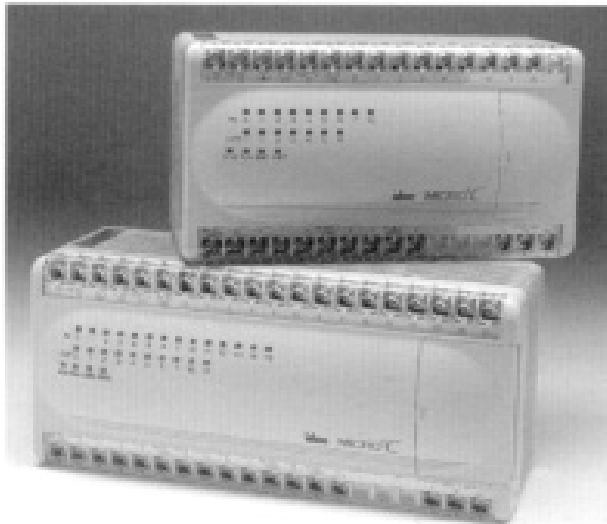


The True Micro PLC Ambassador

Key features of the Micro<sup>3</sup>C include:

- All the features of the Micro<sup>3</sup>
- Talks both ASCII and binary
- Equipped with two serial ports, RS232 and RS485
- Capable of connecting to dial-up modem, serial printer, and bar code reader
- Up to 500 data registers
- Handles a wide range of analog input signals
- Comes with an easy reset button
- Available in 2 sizes: 16- and 24-IO with relay output

-  UL Listed  
File No. E102542
-  CSA Certified  
File No. LR66809
-  CE Certified  
EMC Approved  
File No. B950913332312
- 

Micro<sup>3</sup>

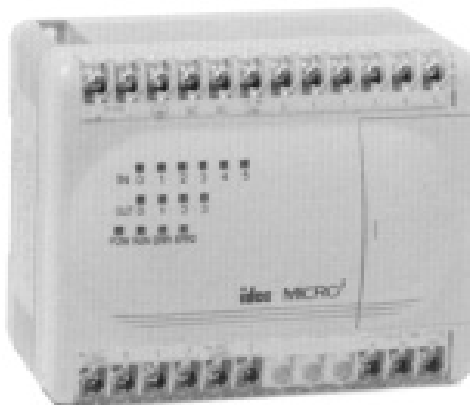

The Benchmark for Micro-PLCs

Key features of the Micro<sup>3</sup> include:

- Built-in communications and networking
- Input/output analog capability
- User program password protection
- Catch input, pulse output
- Real-time clock and calendar available
- Built-in power supply for sensors
- Arithmetic, comparison, and Boolean computation
- High-speed: 400µ/100 steps, 10kHz

-  UL Listed  
File No. E102542
-  CSA Certified  
File No. LR66809
-  CE Certified  
EMC Approved  
File No. B950913332312
- 