




**SERIES 1000 NEON LAMPS**

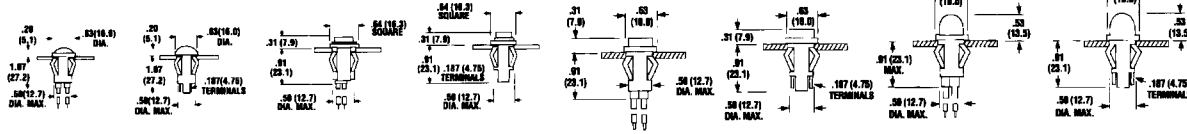

Series 1030D Series 1030QD Series 1050N Series 1050QN Series 1050C Series 1050QC Series 1050A Series 1050QA


UL file no. 20325. CSA file no. 13346. White nylon housing will snap-fit into a .500-.505" diameter hole in panels .020-.100" thick. Bezel: Stainless steel.

Mfr. No.	Color	VAC
<b>Pilot Lamps with Low-Profile Lenses</b>		
1030D1†	Red	105-125
1030D3†	Amber	105-125
1030D4†	White	105-125
1032D5†*	Green	105-125
1030QD1‡	Red	105-125
1030QD3‡	Amber	105-125
1030QD4‡	White	105-125
1032QD5‡*	Green	105-125
1031D1†	Red	208-250
1031D3†	Amber	208-250
1033D5†	Green	208-250
1031QD1‡	Red	208-250
1031QD3‡	Amber	208-250
1033QD5‡	Green	208-250
<b>Pilot Lamps with Square Lenses</b>		
1050N1†	Red	105-125
1050N3†	Amber	105-125
1050N4†	White	105-125
1052N5†*	Green	105-125
1050QN1‡	Red	105-125
1050QN3‡	Amber	105-125
1050QN4‡	White	105-125
1052QN5‡*	Green	105-125
<b>Pilot Lamps with High-Hat Lenses</b>		
1050C1†	Red	105-125
1050C2†	Clear	105-125
1050C3†	Amber	105-125

Mfr. No.	Color	VAC
1050C4†	White	105-125
1052C5†*	Green	105-125
1050QC1‡	Red	105-125
1050QC2‡	Clear	105-125
1050QC3‡	Amber	105-125
1050QC4‡	White	105-125
1052QC5‡*	Green	105-125
1051C1†	Red	208-250
1051C3†	Amber	208-250
1053C5†	Green	208-250
1051QC1†	Red	208-250
1051QC3†	Amber	208-250
1053QC5†	Green	208-250
<b>Pilot Lamps with Dome Lenses</b>		
1050A1†	Red	105-125
1050A3†	Amber	105-125
1050A4†	White	105-125
1052A5†*	Green	105-125
1050QA1‡	Red	105-125
1050QA2‡	Clear	105-125
1050QA3‡	Amber	105-125
1052QA5‡*	Green	105-125
1051A1†	Red	208-250
1051A3†	Amber	208-250
1053A5†	Green	208-250
1051QA1‡	Red	208-250
1051QA3‡	Amber	208-250
1053QA5‡	Green	208-250

† With wire leads 4.4-4.8" long, stripped .43-.57". ‡ With .187"-.020" tinned brass terminals. \* Incorporates G2B lamp and resistor.

**SERIES 2150, 2110 GLO-DOT MINIATURE NEON PILOT LIGHTS**

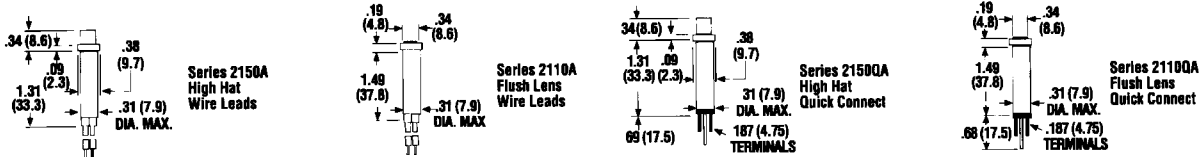

These miniature neon pilot lights are engineered for long service and reliability. Rugged, they are unaffected by shock and vibration. Available in two lens shapes, flush and high-hat. Mounting hole is .31" minimum diam-

eter. **Average operating life:** 25,000 hours. UL recognized and CSA approved. Supplied with push-on speed nut (SN1287). Supplied with 4.4-4.8" wire terminals, stripped 1/2" or .187"-.020" tinned brass terminals.

Mfr. No.	Color	VAC
2150A1	Red	105-125
2150A3	Amber	105-125
2150A4	White	105-125
2150A2	Clear	105-125
2152A5*	Green	105-125
2110A1	Red	105-125
2110A3	Amber	105-125
2110A4	White	105-125
2110A2	Clear	105-125
2112A5*	Green	105-125
2150QA1	Red	105-125
2150QA3	Amber	105-125
2150QA4	White	105-125
2152QA5*	Green	105-125
2110QA1	Red	105-125
2110QA3	Amber	105-125
2110QA4	White	105-125
2112QA5*	Green	105-125
2151A1	Red	208-250
2151A2	Clear	208-250

Mfr. No.	Color	VAC
2151A3	Amber	208-250
2151A4	White	208-250
2153A5*	Green	208-250
2153A6†	Blue	208-250
2111A1	Red	208-250
2111A2	Clear	208-250
2111A3	Amber	208-250
2111A4	White	208-250
2113A5*	Green	208-250
2113A6†	Blue	208-250
2151QA1	Red	208-250
2151QA3	Amber	208-250
2151QA4	White	208-250
2153QA5*	Green	208-250
2111QA1	Red	208-250
2111QA2	Clear	208-250
2111QA3	Amber	208-250
2111QA4	White	208-250
2113QA5*	Green	208-250

\* Incorporates G2B lamp and resistor. † Incorporates T2B lamp and resistor.