


SOLA SILVER LINE LINEARS

FEATURES

- Tight regulation. 0.10% line and load combined
- Full output ratings to 50C
- Built in ovp on 5V models (optional on 12V, 15V, 24V)
- Foldback current limiting
- 100% burn-in
- Warranted for 1 full year
- Form, fit, function replacements for most major manufacturers

SPECIFICATION SUMMARY

- Input AC voltage selectable 100/120/220/230/240
- Input frequency 47 to 440 Hz
- Ripple 3.00mV maximum p-p
- DC output adjustment $\pm 5\%$ minimum
- Operating temperature 0 to +50°C
- EM/RFI meets FCC Class B and VDE 0871 for Class B
- Shock/vibration per MIL-STD-810C

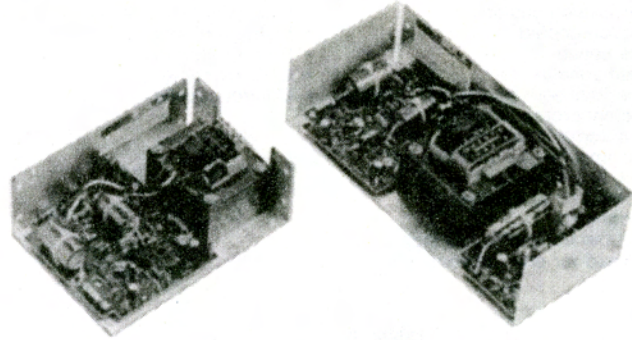

17

POWER SUPPLIES & SEMI-CONDUCTORS

Mfr. No.	Output						Dimensions (In.)		
	Output 1		Output 2		Output 3		L	W	H
	Volts	Amps	Volts	Amps	Volt	Amps			
SLS-05-030-1	5V	3A	4.84	3.99	2.07
SLS-05-060-1	5V	6A	5.62	4.87	2.95
SLS-05-090-1	5V	9A	7.00	4.87	3.30
SLS-05-120-1	5V	12A	9.00	4.87	3.30
SLS-12-017†	12V	1.7A	4.84	3.99	2.07
	or 15V	1.5A			
SLS-12-034	12V	3.4A	5.62	4.87	2.95
SLS-12-051	12V	5.1A	7.00	4.87	3.30
SLS-12-068	12V	6.8A	9.00	4.87	3.30
SLS-15-045	15V	4.5A	7.00	4.87	3.30
SLS-15-060	15V	6A	9.00	4.87	3.30
SLS-24-012	24V	1.2A	4.84	3.99	2.07
SLS-24-024	24V	2.4A	5.62	4.87	2.95
SLS-24-036	24V	3.6A	7.00	4.87	3.30
SLS-24-048	24V	4.8A	7.00	4.87	3.30
SLD-12-1010-12	12V	1.0A	-12V	1.0A	6.50	4.00	2.07
	or 15V	0.8A	or -15V	0.8A			
SLD-12-1818-12†	12V	1.8A	-12V	1.8A	7.00	4.87	2.95
	or 15V	1.5A	or -15V	1.5A			
SLD-12-3434-12	12V	3.4A	-12V	3.4A	9.00	4.87	3.30
SLD-15-3030-15	15V	3A	-15V	3A	9.00	4.87	3.30
SLD-12-6034-05	5V	6A	12V	3.4A	9.00	4.87	3.30
SLD-12-3015-05	5V	3A	12V	1.5A	7.00	4.87	2.95
SLT-12-20404-12†	5V	2A	12V	.4A	-12V	.4A	6.50	4.00	2.07
			or 15V	.4A	or -15V	.4A			
SLT-12-31010-12†	5V	3A	12V	1A	-12V	1A	10.25	4.00	2.95
			or 15V	.8A	or -15V	.8A			
SLT-12-61010-12†	5V	6A	12V	1A	-12V	1A	9.00	4.87	3.30
			or 15V	1A	or -15V	1A			
SLT-12-61818-12†	5V	6A	12V	1.8A	-12V	1.8A	11.00	4.87	3.30
			or 15V	1.5A	or -15V	1.5A			
SLT-24-30530-05	5V	3A	-5V	5A	24V	3A	11.00	4.87	3.30
OVERVOLTAGE PROTECTORS (OVP)									
SLO-12-000-1	6.2V to 34V Adjustable at 8A						1.50	1.55	.56

† 12/15 volt models; factory set for 12 volts; field selectable/adjustable to 15 volts.