


ORIGINAL EQUIPMENT CORDS 3-CONDUCTOR

DETACHABLE, BELDFOIL® SHIELDED, PVC JACKETED (CONT'D)



Molded PVC Grounding Plug PH-290K

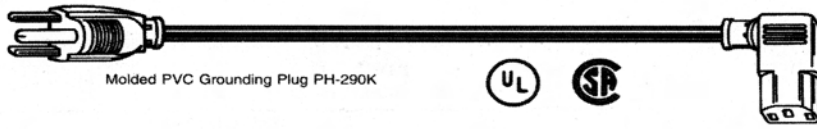

Molded PVC Right Angle Grounding Connector PH-390 IEC 320-C13



Belden No.	Length of Cord	Temp. °C	Color Coding	AWG (Stranding)	Nominal OD (In.)	Rating @125V		Type Cordage	Jacket Color
						Watts	Amps		
17745	6'7"	60	INTL	18(42×34)	.270	1250	10	SVT	Black
17746	9'10"	60	INTL	18(42×34)	.270	1250	10	SVT	Black
17606	6'7"	60	INTL	18(42×34)	.328	1250	10	SJT	Black
17607	9'10"	60	INTL	18(42×34)	.328	1250	10	SJT	Black
17608	6'7"	60	INTL	16(65×34)	.353	1625	13	SJT	Black
17609	9'10"	60	INTL	16(65×34)	.353	1625	13	SJT	Black



PVC Add-A-Plug PH-745




Molded PVC Grounding Connector PH-386A IEC 320-C13



Belden No.	Length of Cord	Temp. °C	Color Coding	AWG (Stranding)	Nominal OD (In.)	Rating @125V		Type Cordage	Jacket Color
						Watts	Amps		
17666	6'7"	60	INTL	18(42×34)	.270	1250	10	SVT	Black
17667	9'10"	60	INTL	18(42×34)	.270	1250	10	SVT	Black
17669	9'10"	60	INTL	18(42×34)	.328	1250	10	SJT	Black

DETACHABLE WITH FULL MOUNTING EARS, BELDFOIL® SHIELDED

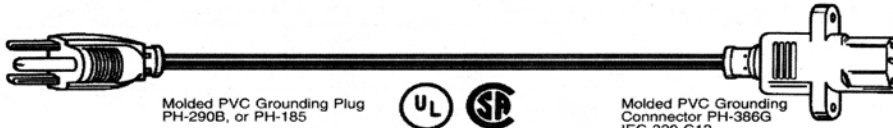

Molded PVC Grounding Plug PH-290B, or PH-185




Molded PVC Grounding Connector PH-386G IEC 320-C13



Belden No.	Length of Cord	Temp. °C	Color Coding	AWG (Stranding)	Nominal OD (In.)	Rating @125V		Type Cordage	Jacket Color
						Watts	Amps		
17734	6'7"	60	INTL	18(42×34)	.270	1250	10	SVT	Black

JUMPER CORDS USHIELDED



Molded PVC Grounding Plug PH-388 IEC 320-C14



Molded PVC Grounding Connector PH-386 IEC 320-C13



Belden No.	Length of Cord	Temp. °C	Color Coding	AWG (Stranding)	Nominal OD (In.)	Rating			Type Cordage	Jacket Color
						Watts	@125V Amps	@250V Amps		
17523	1'8"	60	INTL	18(42×34)	.315	1250	10	10	SJT	Black
17524	3'3"	60	INTL	18(42×34)	.315	1250	10	10	SJT	Black
17525	3'3"	60	INTL	16(65×34)	.340	1625	13	10	SJT	Black

JUMPER CORDS BELDFOIL® SHIELDED



Molded PVC Grounding Plug PH-388 IEC 320-C14



Molded PVC Grounding Connector PH-386q IEC 320-C13



Belden No.	Length of Cord	Temp. °C	Color Coding	AWG (Stranding)	Nominal OD (In.)	Rating			Type Cordage	Jacket Color
						Watts	@125V Amps	@250V Amps		
17753	3'3"	60	INTL	18(42×34)	.270	1250	10	10	SVT	Black
17624	3'3"	60	INTL	18(42×34)	.328	1250	10	10	SJT	Black
17625	3'3"	60	INTL	16(65×34)	.353	1625	13	10	SJT	Black