



1590 SERIES DIECAST ALUMINUM ENCLOSURE



- Rugged diecast aluminum alloy
- Two piece lap joint construction provides protection against dust accumulation and splashing water.
- Provides for improved EMI/RFI shielding
- 6-32 x 1/2" machine screws secure lid into tapped holes
- Designed to meet IP54
- Assembled height = dimension "C" + .16"

Mfr. No.	Dimensions (In.)		
	A	B	C (no lid)
1590LB	1.99	1.99	1.06
1590H	2.07	1.50	1.06
1590A	3.64	1.52	1.06
1590B	4.39	2.34	1.06
1590BB	4.67	3.68	1.18
1590DD	7.40	4.70	1.30
1590S	4.35	3.21	1.57
1590J	5.71	3.74	1.77
1590P1	6.01	3.24	1.81
1590D	7.38	4.70	2.05
1590C	4.72	3.70	2.07
1590T	4.74	3.13	2.17
1590U	4.70	4.70	2.17
1590F	7.38	7.38	2.48
1590K	4.92	4.92	2.95
1590E	7.38	4.70	3.07
1590V	4.70	4.70	3.54


1590 SERIES DIECAST ALUMINUM FLANGED LID ENCLOSURE

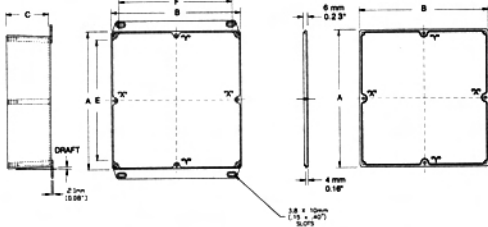

- Rugged diecast aluminum alloy
- Two piece lap joint construction provides protection against dust accumulation and splashing water.
- Provides for improved EMI/RFI shielding
- Flanged lid allows for easy mounting to walls or shelves
- The lid has four countersunk holes cast into the flanges
- The flange allows for added security as the lid screws are hidden against the wall or shelf
- 6-32 x 1/2" machine screws secure lid into tapped holes
- Designed to meet IP54
- Assembled height = dimension "C" + .16"

Mfr. No.	Dimensions (In.)		
	A	B	C (no lid)
1590BFL	1.99	1.99	1.06
1590AFL	3.64	1.52	1.06
1590BFL	4.39	2.34	1.06
1590BBFL	4.67	3.68	1.18
1590DDFL	7.40	4.70	1.30
1590SFL	4.35	3.21	1.57
1590P1FL	6.01	3.24	1.81
1590DFL	7.38	4.70	2.05
1590CFL	4.72	3.70	2.07
1590TFL	4.74	3.13	2.17
1590UFL	4.70	4.70	2.17
1590FFL	7.38	7.38	2.48
1590EFL	7.38	4.70	3.07
1590VFL	4.70	4.70	3.54

1590 Z SERIES WATERTIGHT, HEAVY-DUTY, THICK WALL DIECAST ALUMINUM ENCLOSURE

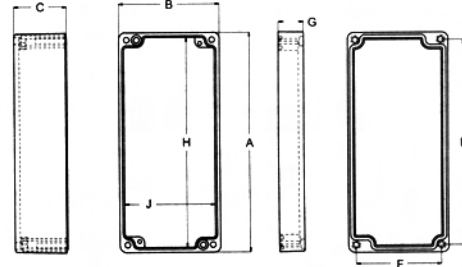


- Rugged diecast aluminum alloy
- Two piece "tongue & groove" construction with a neoprene gasket
- Provides protection against dust accumulation and water. Ideal for repetitive opening and closing
- Four recessed stainless steel machine screws secure lid into tapped holes
- Includes neoprene "O" rings
- Models 1590Z100, 1590Z120, 1590Z150 & 1590Z160 include mounting shelves and 6 drilled & tapped holes for mounting or grounding
- Models 1590Z110, 1590Z130 & 1590Z135 include

- 2 drilled and tapped holes for mounting or grounding
- Models 1590Z135 & 1590Z160 also include a drilled & tapped grounding hole in the lid
- Designed to meet IP65

Mfr. No.	Dimensions (In.)				Lid Ground	Mounting Shelf
	A	B	C (no lid)	G		
1590Z100	2.94	3.14	1.57	.47	No	Yes
1590Z110	2.94	3.14	1.57	.47	No	No
1590Z120	4.92	3.15	1.72	.62	No	Yes
1590Z130	6.89	3.15	1.61	.47	No	No
1590Z135	6.89	3.15	1.61	.79	Yes	No
1590Z150	8.70	4.76	2.39	.79	No	Yes
1590Z160	6.30	6.30	2.76	.79	Yes	Yes

1551 SERIES MINIATURE PLASTIC ENCLOSURE



- Miniature electronic enclosure, ideally suited for mounting printed circuit boards
- Molded in a choice of black or grey general purpose ABS plastic
- 2 P.C. board standoffs molded into interior
- Two piece lap joint construction provides protection against dust accumulation and splashing water
- Designed to meet IP54
- Available with or without keyring kit. Models with keyring kit are predrilled in narrow side.

1551 SERIES WITHOUT KEY RING

Mfr. No.		Dimensions (In.)		
Black	Grey	A	B	C
1551GBK	1551GGY	1.97	1.38	.67
1551HBK	1551HGY	2.36	1.38	.67
1551KBK	1551KGY	3.15	1.57	.67

1551 SERIES WITH KEY RING KIT

Mfr. No.		Dimensions (In.)		
Black	Grey	A	B	C
1551GRBK	1551GRGY	1.97	1.38	.67
1551HRBK	1551HRGY	2.36	1.38	.67
1551KRBK	1551KRGY	3.15	1.57	.67