




MULTIPLE LED EXIT LAMP


FEATURES AND BENEFITS

- Lower power consumption reduces energy costs
- Continuous uniform lighting eliminates hot spots and distortion
- Extremely long lamp life reduces the cost of annual maintenance
- Quality construction materials and procedures meet UL
- Solid state electronics minimize the detrimental effects of vibration, temperature swings and power surges
- Stock and custom lamp availability enhances design flexibility


20 LED / INTERMEDIATE LAMP ASSEMBLY

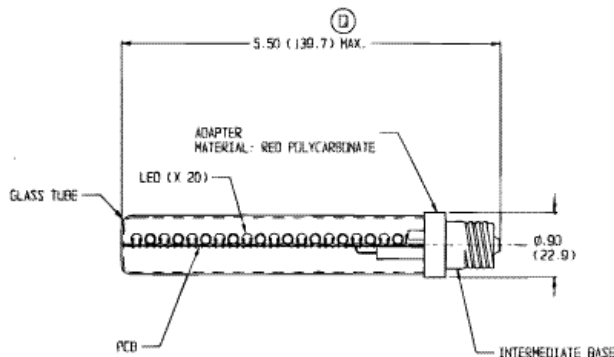


20 LED / BAYONET LAMP ASSEMBLY

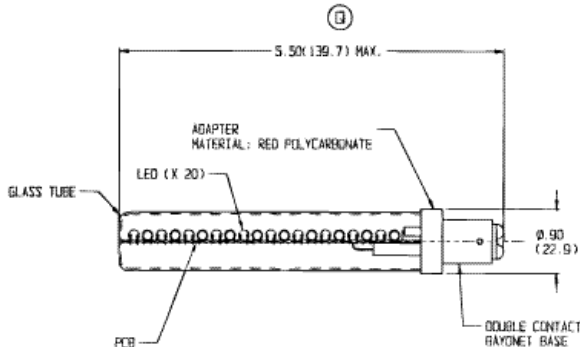

16 LED / CANDELABRA LAMP ASSEMBLY

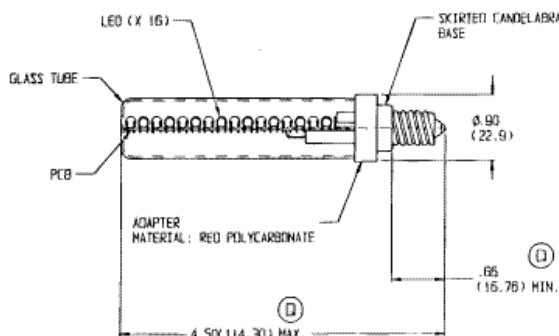


NEON LAMPS

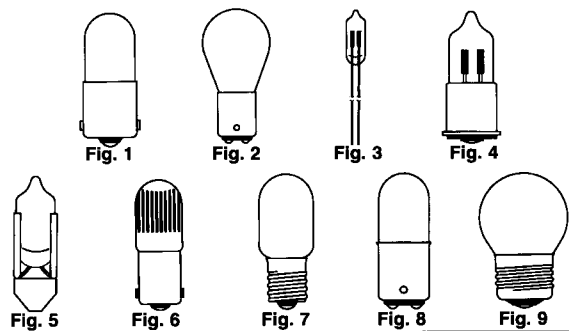

Mfr. No.	Design Current mA (110-120V)	Recommended Series Resistor		Fig.	Lamp Size
		Ohms	Watts		
B6A (NE-21)	2.00	30K	1/4	1	T-4 1/2
B8A (NE-47)	2.00	30K	1/4	1	T-4 1/2
R1A (NE-79)	8.00	7.5K	1/4	2	S-7
2ML (NE-38S)	0.30	100K	1/4	3	T-1 1/4
A1A (NE-2)	0.70	100K	1/4	3	T-2
A1B	0.30	220K	1/4	3	T-2
A1C	1.20	47K	1/4	3	T-2
A2A	0.70	100K	1/4	3	T-2
A2B (NE-2V)	0.70	100K	1/4	3	T-2
A9A (NE-2E)	0.70	100K	1/4	3	T-2
C2A (NE-2H)	1.90	30K	1/4	3	T-2
C2A-T (NE-2HT)	1.90	30K	1/4	3	T-2
A1G	0.30	220K	1/4	4	T-1 3/4
A1H	1.20	47K	1/4	4	T-1 3/4
C7A (NE-2D)	0.70	100K	1/4	4	T-1 3/4
C9A (NE-2J)	1.90	30K	1/4	4	T-1 3/4
K1A (NE-84)	1.90	30K	1/4	5	T-2
K1B1	1.20	47K	1/4	5	T-2
K1C5	0.70	100K	1/4	5	T-2
B1A (NE-51)	0.30	220K	1/4	6	T-3 1/4
B2A (NE-51H)	1.20	47K	1/4	6	T-3 1/4
B2A-R (NE-51HR)	1.20	47K	1/4	6	T-3 1/4
B7A (NE-45)	2.00	30K	1/4	7	T-4 1/2
B5A (NE-17)	2.00	30K	1/4	8	T-4 1/2
B9A (NE-48)	2.00	30K	1/4	8	T-4 1/2
J5A (NE-30)	8.00	7.5K	1/4	9	S-11
J9A (NE-56)	5.00	39K	1/2	9	S-11

NEON GLO-LITE INDICATORS

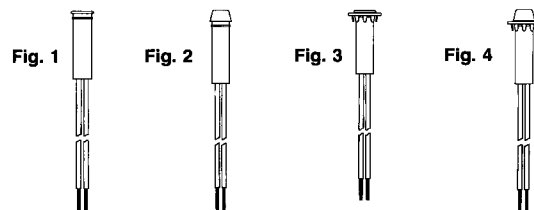

Feature built-in C2A neon, high brightness, 25,000-hour lamp with current limiting series resistor for UL recognized, CSA certified 125 VAC operation. Wired units have 10" #22 AWG leads. Figures 1 & 2 mount 0.375" Dia. (9.53) hole, to 1.25" (31.75) panel thickness; figures 3 & 4 snap mount into 0.500" Dia. (12.70) hole, to 0.078" (1.98) panel thickness.

CML Series Indicators with Flush Transparent Lens

Mfr. No.	Fig.	Color	Description
6063-001-534R	1	Red	Flat face
6063-001-634R	2	Red	Conical face
6073-001-534R	3	Red	Flat face
6073-001-634R	4	Red	Conical face
6073-001-634W	4	White	Conical face

SUBMINIATURE SOLID-STATE INDICATOR LIGHTS



Sub-midget style with built-in bright LED; 70° viewing angle. Resistant to shock and vibration. Can be powered with low electrical energy supply or driven directly with solid-state circuitry. Operates on 1.8 to 2.8 VDC. Maximum DC current: 50 ma. Mounts in 0.193" (4.90) Dia. "D" hole in 0.188" (4.78) thick (max.) panel, on 0.344" (8.74) centers min. 6" wire leads, 105° C PVC insulation.

Mfr. No.	Color	MCD
6039-004-304G	Green	3.2
6039-004-304R	Red	2.0
6039-004-304Y	Yellow	3.2