

ADAME TECH



SWITCHES

Rocker • Toggle • Pushbutton • Keylock

Switches: Rocker ▪ Toggle ▪ Pushbutton ▪ Keylock

Adam Tech's board switch range offers a variety of options, including termination style, circuit, function, and actuator types. Specialty switches are available, such as ruggedized and sealed waterproof. The Adam Tech Switch line provides the versatility necessary to be integrated into a wide range of market applications.



FEATURES AND BENEFITS:

- Sealed waterproof and other specialty switches
- Circuits: SPST, SPDT, DPST, DPDT, and 3PDT
- Multiple function options
- Solder type, PCB and quick connect terminations
- Variety of actuator types
- LED lighted actuators w/ color options
- UL Recognized File no. WOYR2.E520713

ROCKER SWITCHES SPECIFICATIONS:

Material:

Housing: PA66
Actuator: PA66
Contacts: Copper Alloy
Terminals: Brass

Plating:

Contacts: Silver or Gold
Terminals: Silver over Copper underplate

Electrical:

Operating Voltage Range: 20 to 250 V AC
Current Rating Range: 0.4 to 20 Amps
Contact Resistance Range: 10 to 100 mΩ Max.
Insulation Resistance Range: 100 to 1000 MΩ Min.
Dielectric Withstanding Voltage: 1500V AC for 1 Minute

TEMPERATURE RATING:

Operating Temperature Range: -30°C ~ +85°C

TOGGLE SWITCHES SPECIFICATIONS:

Material:

Housing: PA66 or Bakelite
Toggle Handle: Brass
Contacts: Copper Alloy
Terminals: Brass

Plating:

Toggle Handle: Chrome
Contacts: Silver or Gold
Terminals: Tin, Silver or Gold

Electrical:

Operating Voltage Range: 125 to 250 V AC
Current Rating Range: 1.5 to 12 Amps
Contact Resistance Range: 10 to 100 mΩ Max.
Insulation Resistance Range: 100 to 1000 MΩ Min.
Dielectric Withstanding Voltage Range: 1000 to 1500V AC for 1 Minute

TEMPERATURE RATING:

Operating Temperature Range: -30°C ~ +85°C

PUSHBUTTON SWITCHES SPECIFICATIONS:

Material:

Body: ABS, PA66, PC, or PBT
Button: Stainless steel, ABS, PC, or POM
Contacts: Copper Alloy
Terminals: Brass

Plating:

Contacts: Tin, Silver or Gold
Terminals: Tin, Silver or Gold

Electrical:

Operating Voltage Range: 32 to 250 V AC
Current Rating Range: 0.4 to 16 Amps
Contact Resistance Range: 10 to 50 mΩ Max.
Insulation Resistance Range: 100 to 1000 MΩ Min.
Dielectric Withstanding Voltage Range: 1000 to 2000V AC for 1 Minute

TEMPERATURE RATING:

Operating Temperature Range: -30°C ~ +85°C

KEYLOCK SWITCHES SPECIFICATIONS:

Material:

Housing: Steel
Terminals: Brass

Plating:

Housing: Polished chrome
Terminals: Tin or Silver

Electrical:

Operating Voltage Range: 125 to 250 V AC
Current Rating Range: 0.5 to 4 Amps
Contact Resistance Range: 20 to 100 mΩ Max.
Insulation Resistance Range: 100 to 1000 MΩ Min.
Dielectric Withstanding Voltage Range: 500 to 1500V AC for 1 Minute

TEMPERATURE RATING:

Operating Temperature Range: -25°C ~ +85°C

Rocker Switches

Adam Tech's Rocker Switch offering is composed of miniature, sub-miniature, and medium sized rocker switches. Specialized sealed rockers are available, with IP67 waterproof ratings. These rocker switch types are offered with various termination options, circuits, functions, and actuators. Standard and LED lighted actuators are available in multiple colors, shapes, and actuator markings.



FEATURES AND BENEFITS:

- Variety of Rocker Switch types
- Sealed waterproof IP67 versions
- Solder type, PCB and quick connect terminations
- Circuits: SPST, SPDT, DPST, and DPDT
- Functions: ON-ON, ON-OFF, OFF-(ON), ON-OFF-ON, and (ON)-OFF-ON
- Rocker shapes: round and rectangular (curved and standard V)
- Standard and custom actuator markings
- LED lighted actuators w/ color options

APPLICATIONS:



- Household appliances
- Computer hardware
- Power supplies and battery chargers
- Instrumentation
- Telecommunications
- Medical equipment
- Industrial equipment

ROCKER SWITCH PART NUMBER CONFIGURATION

EXAMPLE


SW - R - 1 - A - S - LR 1 - 1

ITEM	TYPE	CONTACT FORM	SWITCH FUNCTION	TERMINAL OPTION	ACTUATOR COLOR	ACTUATOR MARKING	VERSION / STYLE
SW = Switch	R = Rocker R1 = Medium Rocker R2 = Miniature Rocker R3 = Subminiature Rocker	1 = SPST 2 = SPDT 3 = DPST 4 = DPDT 5 = 3PST 6 = 3PDT	A = ON-OFF B = ON-ON C = OFF-(ON) D = ON-(ON) E = ON-OFF-ON F = ON-OFF-(ON) G = (ON)-OFF-(ON) H = (ON)-OFF-ON J = (ON)-OFF K = (ON)-ON	A = Solder B = PCB Vertical C = PCB R/A D = Screw Lug E = QC .250" [6.35mm] F = QC .187" [4.80mm]	Blank = Standard Black SB = Small Black W = White R = Red G = Green Y = Yellow B = Blue O = Orange LW = Lighted White LR = Lighted Red LG = Lighted Green LY = Lighted Yellow LB = Lighted Blue LO = Lighted Orange	1 = 2 = 3 = 4 = 5 = 6 =	See Datasheets

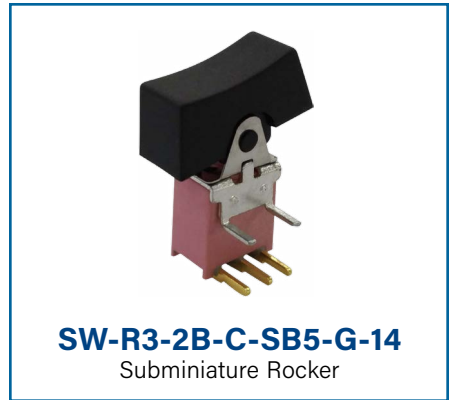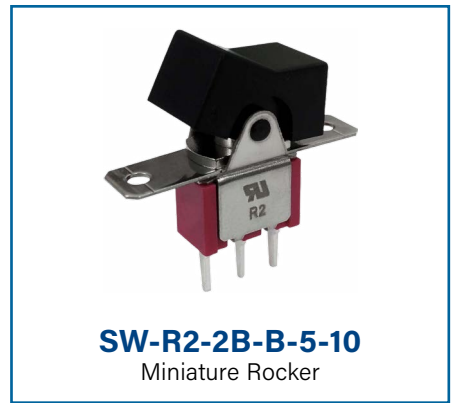

Toggle Switches

Adam Tech Toggle Switches are medium, sub-miniature, and miniature switches that are manually actuated by a mechanical lever. They are available in low current, power, and sealed (waterproof) IP67/IP68 versions. Commonly used as light duty control switches, these toggle switches are ideal for switching both high and low currents. This product line boasts a variety of termination styles, circuits, functions, and actuator lengths, making it ideal for a broad range of applications.

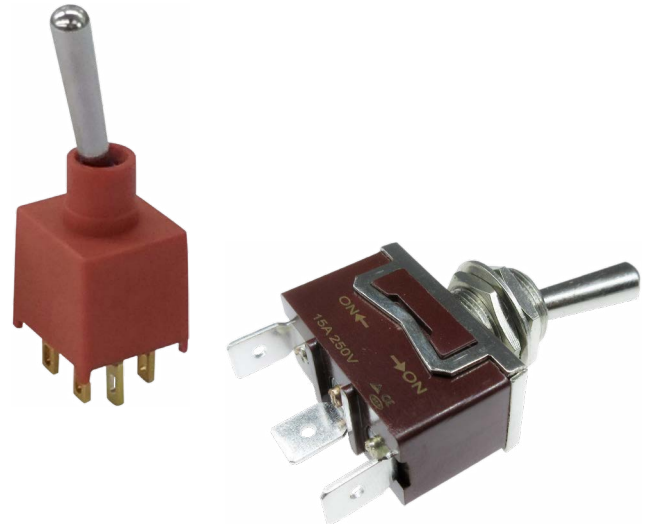

FEATURES AND BENEFITS:

- Variety of Toggle Switch sizes and orientations
- Sealed IP67 waterproof
- Sealed power IP68 waterproof
- Termination styles: solder type, PCB type, screw lug, PCB terminal, and quick connect terminal
- Circuits: SPST, SPDT, DPST, DPDT, and 3PDT
- Functions: ON-ON, ON-OFF, OFF-(ON), and ON-OFF-ON
- Various actuator length options

APPLICATIONS:

- Light controls
- Household appliances
- Commercial appliances
- Telecommunications
- Industrial equipment
- Automotive

TOGGLE SWITCH PART NUMBER CONFIGURATION

EXAMPLE							
ITEM	TYPE	CONTACT FORM	SWITCH FUNCTION	TERMINAL OPTION	HANDLE OPTION	CONTACT MATERIAL	VERSION / STYLE
SW	T1	1	A	S	A	(S)	1
SW = Switch	T = Toggle T1 = Medium Toggle T2 = Miniature Toggle T3 = Subminiature Toggle T4 = Power Toggle	1 = SPST 2 = SPDT 3 = DPST 4 = DPDT 5 = 3PST 6 = 3PDT 7 = SP3T	A = ON-OFF B = ON-ON C = OFF-(ON) D = ON-(ON) E = ON-OFF-ON F = ON-OFF-(ON) G = (ON)-OFF-(ON) H = (ON)-OFF-ON	A = Solder B = PCB Vertical C = PCB R/A D = Screw Lug E = QC .250" [6.35mm] F = QC .187" [4.80mm]	A2 = 11.0mm B2 = 21.0mm C2 = 6.9mm D2 = 12.5mm E2 & G2 = 15.0mm F2 = 12.0mm L2 = 17.0mm FL2 = 21.0mm A3 = 9.4mm C3 = 5.4mm D3 = 8.9mm Blank = 17.5mm C1 = 14.0mm D1 = 18.0mm E1 = 28.0mm L1 = 50.0mm TA1 = 16.2mm T1 = 12.6mm T2 = 7.6mm T3 = 10.7mm	S = Silver G = Gold	See Datasheets



SW-T1-1A-B-K1
Medium Toggle



SW-T1-3A-D-K2
Medium Toggle



SW-T1-4B-B-K2A
Medium Toggle



SW-T1-6B-D-C1-K3
Medium Toggle




SW-T2-3A-A-A2-M2
Miniature Toggle



SW-T2-4B-A-T1-S-03
Miniature Toggle



SW-T2-4B-B-A2-MA2
Miniature Toggle

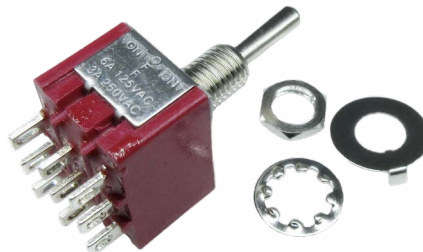

SW-T2-6E-A-A2-M3
Miniature Toggle



SW-T3-2B-A-A3-S1
Subminiature Toggle



SW-T3-4B-A-T3-S-05
Subminiature Toggle



SW-T4-1A-E-TA1-01
Power Toggle



SW-T4-2B-E-TA1-01
Power Toggle

Pushbutton Switches

Pushbutton switches are tactile switches commonly used in industrial control panels to operate circuits within a device. Adam Tech offers a vast line of Pushbutton Switches including both metal and plastic shell types. They are available in standard, miniature, and subminiature sizes. Operationally they include snap-acting, alternate acting, low profile, and illuminated pushbutton switches. Specialty pushbuttons including anti-vandal, industrial, high current, high performance, and sealed IP67/IP68 waterproof switches are also available. All pushbutton switches are offered in various termination styles, circuits, functions, and actuator types.

FEATURES AND BENEFITS:

- Variety of Pushbutton Switch types
- IP68 and IP67 sealed waterproof
- IP68 high performance
- High current
- Anti-vandal
- Termination styles: solder type, PCB type, screw lug, and surface mount
- Circuits: SPST, SPDT, and DPDT

- Functions: ON-ON, ON-OFF, OFF-ON, Momentary, Latching, ON-Momentary, OFF-Momentary, NO-NC Momentary, 1NO-1NC (Momentary or Latching), ON-OFF Latching, OFF-ON Momentary, and ON-ON Latching
- Actuator types: round button, round plunger, and square button
- LED lighted actuators w/ color options



APPLICATIONS:

- Industrial control panels
- Household appliances
- Consumer electronics
- Industrial equipment
- Telecommunications

PUSHBUTTON SWITCH PART NUMBER CONFIGURATION							
EXAMPLE							
SW-	PB	- 1 A S -	A	-	RX	- Y - B1 -	Q - 1 - 1
ITEM	TYPE		TERMINAL OPTION		LED TYPE	CONTACT MATERIAL	LED VOLTAGE (ANTI-VANDAL)
SW = Switch	PB1 = Plastic Pushbutton PB2 = Plastic Waterproof PB3 = Foot Switch PB4 = Game Switch PB5 = Industrial Switch PB6 = Door Switch PB7 = Ant-Vandal Switch PB8 = Snap Acting Switch PB9 = Subminiature PB10 = High Performance Sealed PB11 = IP67 Front Panel Protection Illuminated		A = Solder B = PCB Vertical C = PCB R/A D = Screw Lug E = QC .250" [6.35mm] F = QC .187" [4.80mm]		R = Ring Illuminated L = Laser Power Logo LR = Laser Power Logo + Ring LS = Lens Illuminated C = Custom Laser Symbol F = Full Illuminated LED COLOR Blank = Standard Black SB = Small Black W = White R = Red G = Green Y = Yellow B = Blue O = Orange S = Silver RG = Red/Green RY = Red/Yellow RB = Red/Blue RW = Red/White GB = Green/Blue RGB = Red/Green/Blue RGY = Red/Green/Yellow RGW = Red/Green/White RBY = Red/Blue/Yellow RBW = Red/Blue/White	Q = Silver P = Silver (Tin Plated Terminals) R = Gold K = Gold (Tin Plate Terminals) G = Silver (Gold Plated Terminals)	1 = 3V 2 = 6V 3 = 12V 4 = 24V 5 = 48V 6 = 110V 7 = 220V
	CONTACT FORM 1 = SPST 2 = SPDT 3 = DPST 4 = DPDT 5 = 3PST 6 = 3PDT 7 = SP3T	SWITCH FUNCTION A = OFF-ON B = OFF-MOM C = ON-MOM D = ON-OFF E = 1NO-1NC F = 1NC G = 2NO-2NC H = 2NC J = ON-ON K = ON-(ON)	FUNCTION S = Momentary Z = Latching		SHAPE Y = Round F = Square J = Rectangle R = Emergency M = Mushroom X = Rotary Type K = Key Type H = Hexagonal	BUSHING See datasheets	VERSION / STYLE See datasheets



SW-PB1-1DZ-A-P1-A
Plastic Pushbutton



SW-PB2-2EZ-A-L1
IP67 Sealed Metal Pushbutton



SW-PB5-AA2BR112V-IP40-8
IP40 Industrial Pushbutton



SW-PB7-01PB4EBRBM
Anti-Vandal Pushbutton



SW-PB7-03LB22CFRR12V
LED Ring, Flat Anti-Vandal Pushbutton




SW-PB7-06LB22FFPG12V
High Current Anti-Vandal Pushbutton



SW-PB7-07LB42CRRB12V
LED Ring, Raised Anti-Vandal Pushbutton



SW-PB8-AA00B11GE-2
Snap Acting Pushbutton



SW-PB8-BE222QE-1
Snap Acting Pushbutton



SW-PB9-BB00BQE-5
Subminiature Pushbutton



SW-PB10-AAA1QE-4
IP68 Sealed Pushbutton



SW-PB11-1CSG-10
IP67 Front Panel Protection Illuminated Pushbutton

Keylock Switches

Keylock switches are rotary switches that utilize a lock and key for additional security. Adam Tech's Keylock Switch offering is composed of a variety of panel mount, solder terminal switches. These switches are available in various panel cutout dimensions, circuits, and functions. Key pull options include single position and multiple positions.



FEATURES AND BENEFITS:

- Panel mount, solder terminal keylock switches
- Panel cutout dimensions: 19mm, 16mm, 15mm, 14.5mm, and 12mm
- Circuits: SP, DP, and SPDT
- Functions: ON-ON, ON-OFF, and OFF-ON-ON
- Single key pull and multiple key pull options

APPLICATIONS:

- Automotive
- Computer hardware
- Security applications
- Audio/video applications
- Medical equipment
- Industrial equipment

KEYLOCK SWITCH PART NUMBER CONFIGURATION

EXAMPLE	SW - K - 3		
	ITEM	TYPE	VERSION
	SW = Switch	K = Keylock	1-7 = ON-OFF 5A = OFF-(ON) 7A = OFF-ON-ON 8 = ON-ON 9 = 3P ON-ON 9A = 6P ON-ON 10 = 2P ON-OFF 11-12 = DPST 4P ON-OFF 11A-12A = SPDT 4P ON-ON 13 = SP ON-ON 13A = DP ON-ON 13B = SP ON-ON-ON 13C = DP ON-ON-ON 14 = SP ON-(ON) 14A = DP ON-(ON) 14B = SP ON-ON-(ON) 14C = DP ON-ON-(ON) 14D = SP or DP (ON)-ON-(ON) 15 = SP ON-OFF

SW-R-K1-A.png



SW-R-K1-A

11.3mm, Flat Top, ON-OFF, Flat Key



SW-R-K4-A

12mm, Flat Top, ON-OFF, Flat Key



SW-R-K5-A

11.5mm, Raised Top, ON-OFF, Tubular Key



SW-R-K7A-A

16mm, Flat Top, ON-OFF, Dome Flat Key



SW-R-K8-A

16mm, Raised Top, ON-ON, Flat Key



SW-R-K9-A

16mm, Raised Top, ON-ON, Flat Key



SW-R-K10-A

19mm, Raised Top, ON-OFF, Flat Key



SW-R-K11B-A

19mm, Raised Top, ON-ON, Flat Key



SW-R-K13A-A

19mm, Dome Top, ON-ON, Flat Key

Factory



ADAM TECH

ADAM TECH USA

(WORLDWIDE HQ)

909 Rahway Ave.

Union, NJ 07083

U.S.A.

Tel: 908-687-5000

Fax: 908-687-5710

Email: info@adam-tech.com

ADAM TECH EUROPE

Marcel Schwob

Karlsruhe, Germany

Email: info@adam-tech.com

ADAM TECH SOUTH AMERICA

Cesar Nakajune

Sao Paulo, Brazil

Email: info@adam-tech.com

ADAM TECH TAIWAN

9F-3, No. 10, Lane 609, Sec. 5, Chongxin Rd.

Sanchong Dist., New Taipei City 241

Taiwan (R.O.C.)

Tel: 886-2 2999 8028

Fax: 886-2 2999 8062

Email: info@adam-tech.com

ADAM TECH CHINA

Yingfeng 1st Road, Dajingtou Community

Dalang Town, Dongguan City

Guangdong Province

China (P.R.C.)

Tel: 886-2 2999 8028

Fax: 886-2 2999 8062

Email: info@adam-tech.com

To contact us, scan the QR
code to reach our website
inquiry form.



adam-tech.com