

SINGLE DIGIT SMD




Part Number		Chip Structure (Emitted Color)	λpeak (nm)	Intensity(ucd) I _F =10mA	
Common Anode	Common Cathode	(Emitted Color)		Min.	Тур.

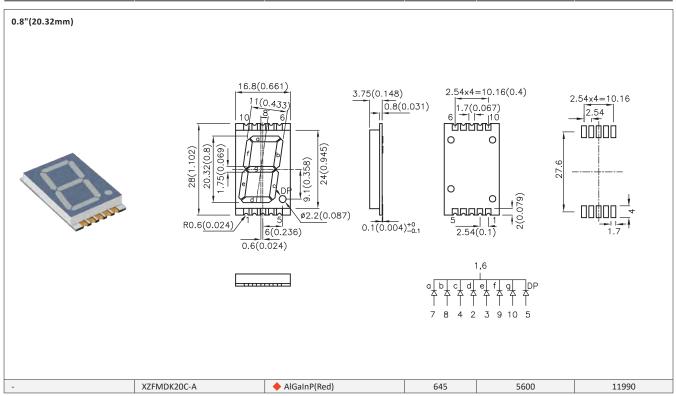


DUAL DIGIT SMD


Part Number		Chip Structure	λpeak (nm)	Intensity(ucd) I _F =10mA	
Common Anode	Common Cathode	(Emitted Color)		Min.	Тур.

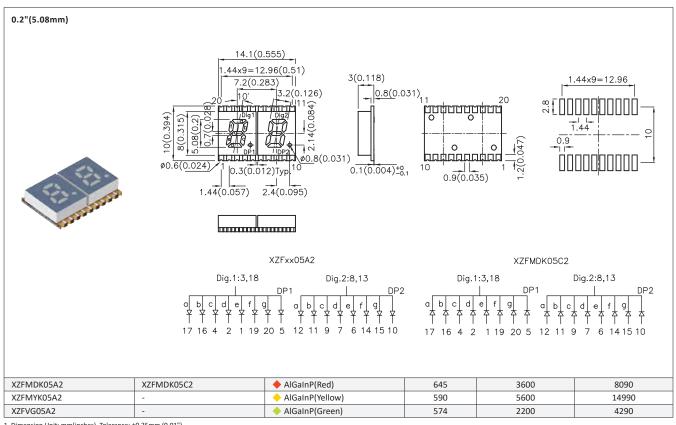

- 1. Dimension Unit: mm(inches), Tolerance: ±0.25mm (0.01").
 2. Luminous intensity value and wavelength are in accordance with CIE127-2007 standards.
- 3. We reserve the right to make changes at any time to enhance the design and / or performance of the product.



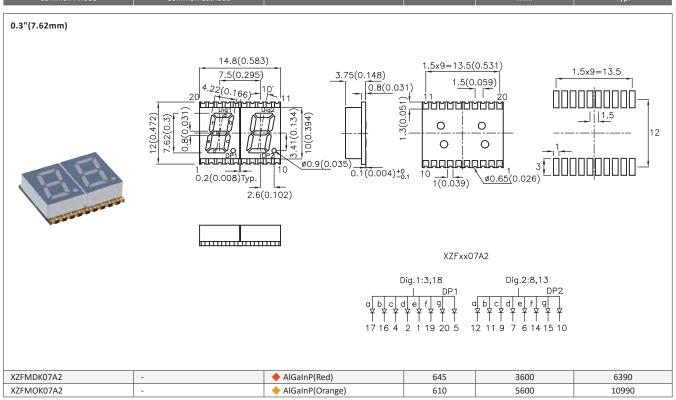


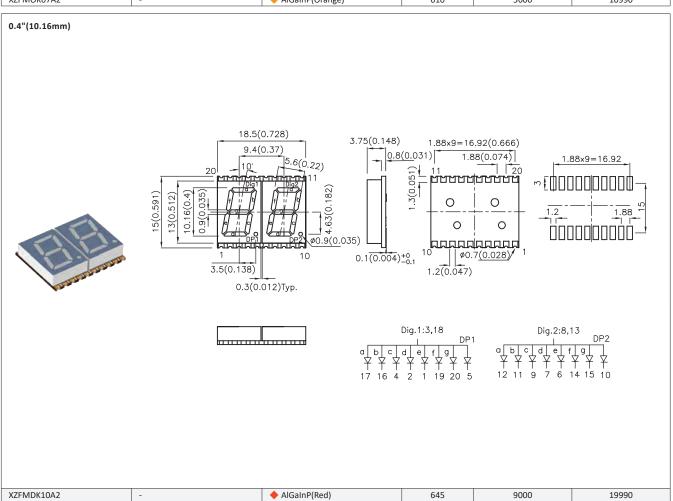

- 1. Dimension Unit: mm(inches), Tolerance: ±0.25mm (0.01").
 2. Luminous intensity value and wavelength are in accordance with CIE127-2007 standards.
- 3. We reserve the right to make changes at any time to enhance the design and / or performance of the product.


DUAL DIGIT SMD



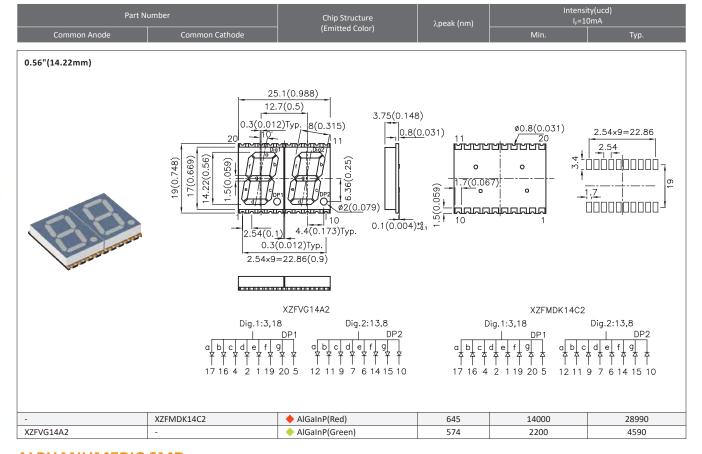

ALPHANUMERIC SMD

Part Number		Chip Structure	λpeak (nm)	Intensity(ucd) I _r =10mA	
Common Anode	Common Cathode	(Emitted Color)		Min.	Тур.
			· · · · · · · · · · · · · · · · · · ·	·	

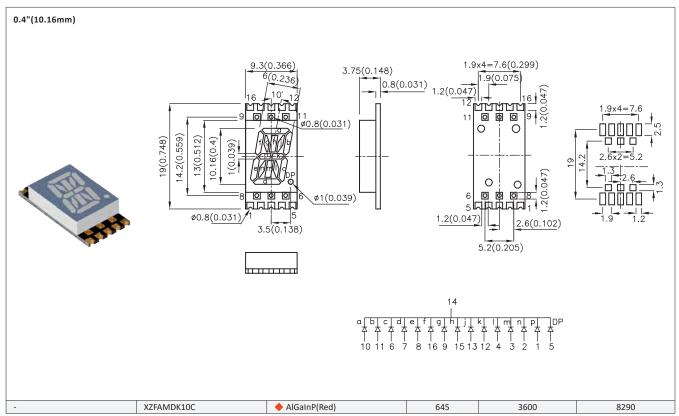

- 1. Dimension Unit: mm(inches), Tolerance: ±0.25mm (0.01").
 2. Luminous intensity value and wavelength are in accordance with CIE127-2007 standards.
- 3. We reserve the right to make changes at any time to enhance the design and / or performance of the product.