

PANEL MOUNT INDICATOR, NON-RELAMPABLE NEON TECHNOLOGY

MOUNTING HOLE, Ø 0.500"

PART NO.	LENS COLOR	VOLTAGE	CURRENT [mA]	RATED LIFE HOURS
NEON 115VAC SERIES				
WL-1060D1	RED	105-125VAC	1.5mA	25,000
WL-1060D3	AMBER	105-125VAC	1.5mA	25,000
WL-1060D4	WHITE	105-125VAC	1.5mA	25,000
WL-1060D5	GREEN	105-125VAC	1.5mA	25,000
NEON 230VAC SERIES				
WL-1061D1	RED	208-250VAC	1.5mA	25,000
WL-1061D3	AMBER	208-250VAC	1.5mA	25,000
WL-1061D4	WHITE	208-250VAC	1.5mA	25,000
WL-1061D5	GREEN	208-250VAC	1.5mA	25,000
NEON 480VAC SERIES				
WL-1062D1	RED	432-528VAC	1.5mA	25,000
WL-1062D3	AMBER	432-528VAC	1.5mA	25,000
WL-1062D4	WHITE	432-528VAC	1.5mA	25,000
WL-1062D5	GREEN	432-528VAC	1.5mA	25,000
NEON 600VAC SERIES				
WL-1063D1	RED	540-660VAC	1.5mA	25,000
WL-1063D3	AMBER	540-660VAC	1.5mA	25,000
WL-1063D4	WHITE	540-660VAC	1.5mA	25,000
WL-1063D5	GREEN	540-660VAC	1.5mA	25,000

NOTES


1. Recommended panel thickness
0.030" to 0.090"
2. 6" leads with 1/2" strip are standard
3. Storage temperature
 T_{STG} : -25°C - +80°C
4. Ambient temperature
 T_A : -20°C - +60°C
5. Voltage tolerance
 V_{OP} : ±10%
6. Body material
Polycarbonate, white
7. Lens material
Polycarbonate
8. Bezel material
Stainless steel
9. Wire gauge
20 AWG
10. Wire strip
1/2"

CERTIFICATIONS

UL (E340667), RoHS



DIMENSIONAL CHARACTERISTICS

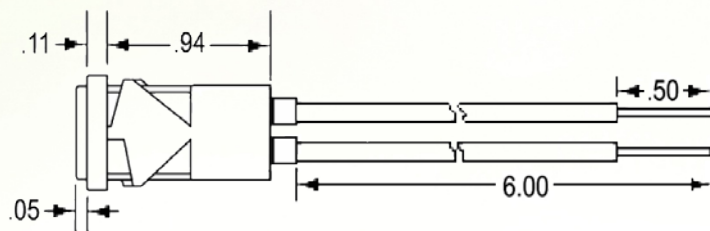

unless otherwise specified, all dimensions are in inches



OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

