

PANEL MOUNT INDICATOR, NON-RELAMPABLE

NEON AND INCANDESCENT TECHNOLOGY

MOUNTING HOLE, Ø 0.500"

PART NO.	LENS COLOR	VOLTAGE	CURRENT [mA]	RATED LIFE HOURS
NEON 115VAC SERIES				
WL-1030D1	RED	105-125VAC	1.5mA	25,000
WL-1030D3	AMBER	105-125VAC	1.5mA	25,000
WL-1030D4	WHITE	105-125VAC	1.5mA	25,000
WL-1032D5	GREEN	105-125VAC	1.5mA	25,000
NEON 230VAC SERIES				
WL-1031D1	RED	208-250VAC	1.5mA	25,000
WL-1031D3	AMBER	208-250VAC	1.5mA	25,000
WL-1031D4	WHITE	208-250VAC	1.5mA	25,000
WL-1033D5	GREEN	208-250VAC	1.5mA	25,000
INCANDESCENT 12V SERIES				
WL-1090D1-12V	RED	12V-14V	80mA	25,000
WL-1090D3-12V	AMBER	12V-14V	80mA	25,000
WL-1090D4-12V	WHITE	12V-14V	80mA	25,000
WL-1090D5-12V	GREEN	12V-14V	80mA	25,000
INCANDESCENT 28V SERIES				
WL-1090D1-28V	RED	24V-28V	40mA	25,000
WL-1090D3-28V	AMBER	24V-28V	40mA	25,000
WL-1090D4-28V	WHITE	24V-28V	40mA	25,000
WL-1090D5-28V	GREEN	24V-28V	40mA	25,000

NOTES


1. Recommended panel thickness
0.030" to 0.090"
2. 6" leads with 1/2" strip are standard
3. Storage temperature
 T_{STG} : -25°C - +80°C
4. Ambient temperature
 T_A : -20°C - +60°C
5. Voltage tolerance
 V_{OP} : ±10%
6. AC operation only for neon type
7. AC/DC operation for incandescent type
8. Body material
Nylon, white
9. Lens material
Polycarbonate
10. Bezel material
Chrome
11. Wire gauge
18 AWG
12. Wire strip
1/2"

CERTIFICATIONS

UL (E340667), RoHS



DIMENSIONAL CHARACTERISTICS

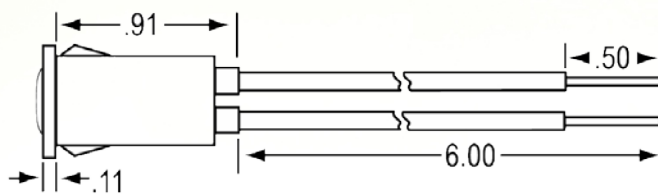

unless otherwise specified, all dimensions are in inches



OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

