

# LED PANEL MOUNT INDICATOR

## SUPERFLAT BEZEL, DC OPERATION

MOUNTING HOLE, Ø 6mm

| PART NO.                  | COLOR  | VOLTAGE<br>V <sub>OP</sub> [V] DC | CURRENT<br>I <sub>OP typ.</sub> [mA] DC | LUMI. INTENSITY<br>LED<br>I <sub>V typ.</sub> [mcd] | DOMINANT<br>WAVELENGTH<br>λ <sub>D</sub> [nm] |
|---------------------------|--------|-----------------------------------|---|---|---|
| <b>SATIN CHROME BEZEL</b> |        |                                   |   |   |   |
| WL-19000251               | GREEN  | 12V                               | 20                                      | 10  | 568   |
| WL-19000252               | YELLOW | 12V                               | 20                                      | 10  | 588   |
| WL-19000253               | RED    | 12V                               | 20                                      | 15  | 625   |
| WL-19000351               | GREEN  | 24V                               | 15                                      | 8   | 568   |
| WL-19000352               | YELLOW | 24V                               | 15                                      | 8   | 588   |
| WL-19000353               | RED    | 24V                               | 15                                      | 10  | 625   |
| WL-19000451               | GREEN  | 28V                               | 15                                      | 8   | 568   |
| WL-19000452               | YELLOW | 28V                               | 15                                      | 8   | 588   |
| WL-19000453               | RED    | 28V                               | 15                                      | 10  | 625   |
| <b>BLACK CHROME BEZEL</b> |        |                                   |   |   |   |
| WL-19001251               | GREEN  | 12V                               | 20                                      | 10  | 568   |
| WL-19001252               | YELLOW | 12V                               | 20                                      | 10  | 588   |
| WL-19001253               | RED    | 12V                               | 20                                      | 15  | 625   |
| WL-19001351               | GREEN  | 24V                               | 15                                      | 8   | 568   |
| WL-19001352               | YELLOW | 24V                               | 15                                      | 8   | 588   |
| WL-19001353               | RED    | 24V                               | 15                                      | 10  | 625   |
| WL-19001451               | GREEN  | 28V                               | 15                                      | 8   | 568   |
| WL-19001452               | YELLOW | 28V                               | 15                                      | 8   | 588   |
| WL-19001453               | RED    | 28V                               | 15                                      | 10  | 625   |


## NOTES

- Maximum panel thickness 7mm
- Storage temperature  
T<sub>STG</sub>: -25°C – +80°C
- Ambient temperature  
T<sub>A</sub>: -20°C – +60°C
- DC operation only
- Voltage tolerance  
V<sub>OP</sub>: ±10%
- Electro-optical ratings at  
T<sub>A</sub>=25°C
- Degree of protection: IP40
- Mounting hole  
6 + 0.2mm
- 2.0 x 0.5mm terminals are standard
- Due to production tolerances, slight color variations may be detected within individual consignments
- Supplied with mounting hardware; 1) spring washer, and 2) M6 nut
- CAUTION: Do not solder directly to terminals

## CERTIFICATIONS

**RoHS**  
COMPLIANT

## DIMENSIONAL CHARACTERISTICS

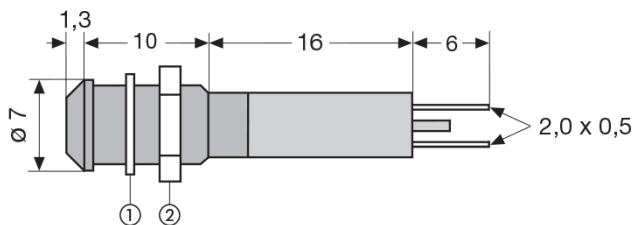

unless otherwise specified, all dimensions are in mm



## OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

**wamco**  
LIGHTING