


Hollow Momentary Type Compact Push Switch

SPEG Series

NEW
2009

Light for the switch center.

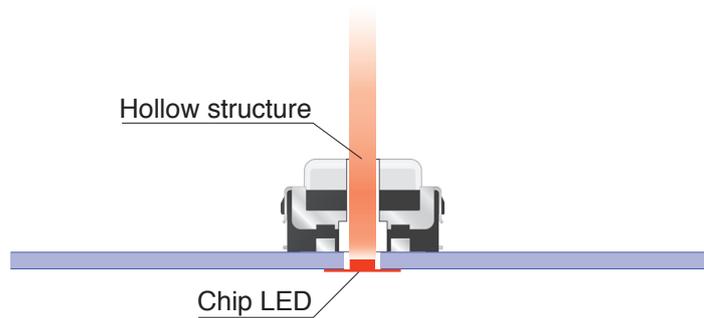

Hollow structure enables location of a chip LED **in the center.**




Original mechanical structure realized soft clicking feel and long travel of 1.1mm.

- Achieved compact dimensions of 7.19×8.39×5mm (W×D×H).
- Supplied with metal cover for automatic mounting.
- Reflow solderable.




With mounting cover

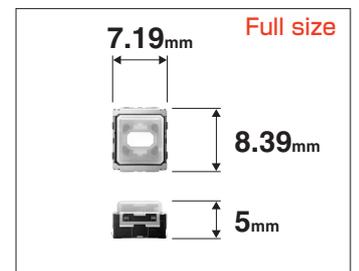

Hollow Momentary Type Compact Push Switch

SPEG Series



With mounting cover

Original mechanical structure realized soft clicking feel and long travel.

Applications


Power switch for notebook PCs, etc.

Typical Specifications


Items	Specifications
Dimensions (W×D×H)	7.19×8.39×5mm
Rating (max.) / (min.) (Resistive load)	50mA 16V DC / 50μA 3V DC
Contact resistance (Initial / After operating life)	200mΩ max. / 500mΩ max.
Operating force	2.16N
Operating life	30,000cycles
Travel	1.1mm
Poles	1

Dimensions


Unit:mm

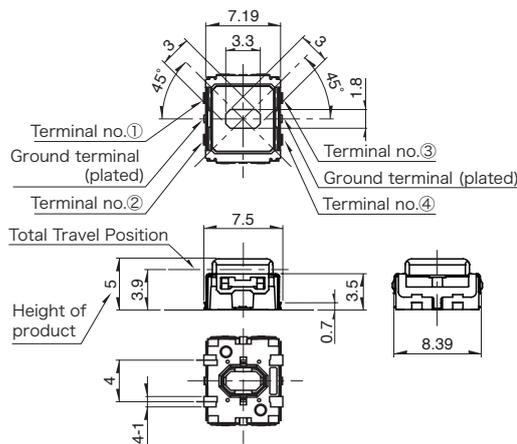

PC board mounting hole and land dimensions

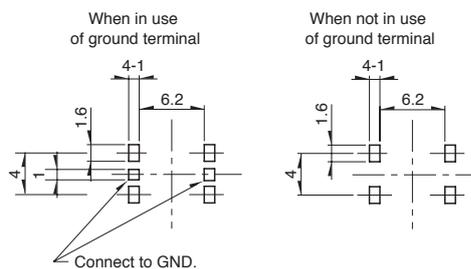


Circuit Diagram



Specification of Embossed Taping Package (Taping Packaging for Auto-insertion)

Unit:mm

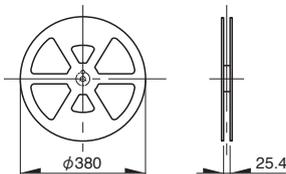

Number of packages(pcs.)			Tape width(mm)
1 reel	1 case/ Japan	1 case/ export packing	24
1,200	2,400	4,800	

Precautions when handling our products

- For the export of products which are controlled items subject to foreign and domestic export laws and regulations, you must obtain approval and/or follow the formalities of such laws and regulations.
- Products must not be used for military and/or antisocial purposes such as terrorism, and shall not be supplied to any party intending to use the products for such purposes.
- Unless provided otherwise, the products have been designed and manufactured for application to equipment and devices which are sold to end-users in the market, such as AV (audio visual) equipment, home electric equipment, office and commercial electronic equipment, information and communication equipment or amusement equipment. The products are not intended for use in, and must not be used for, any application of nuclear equipment, driving control equipment for aerospace or any other unauthorized use.
With the exception of the above mentioned banned applications, for applications involving high levels of safety and liability such as medical equipment, burglar alarm equipment, disaster prevention equipment and undersea equipment, please contact an Alps sales representative and/or evaluate the total system on the applicability. Also, implement a fail-safe design, protection circuit, redundant circuit, malfunction protection and/or fire protection into the complete system for safety and reliability of the total system.
- Before using products which were not specifically designed for use in automotive applications, please contact an Alps sales representative.

Cautions for using this catalog

- The colors of the products in the catalog may slightly differ from those of the actual products.
- The external appearance, functions and other specifications herein may be changed for improvement and other reasons without prior notice. Furthermore, the products herein may discontinue without prior notice.
- All product names, company names and names of standards described in this catalog are trademarks or registered trademarks of their respective owners.
- The contents of this catalog are according to Alps Electric as of January 2009.
- This catalog is valid until the end of December 2009.

Inquiries about products

Products information center
+81 (3) 5499-8154
 Products information site
<http://www3.alps.com/e/>

Perfecting the Art of Electronics

ALPS[®]
ALPS ELECTRIC CO., LTD.
 1-7, Yukigaya-otsukamachi, Ota-ku, Tokyo, 145-8501, Japan