




Solid State Timers and Controllers




438U Universal Time Capsule® Delay-On-Make Timer




The Model 438U is an in-line timing device that performs as an in-line delay-on-make timer. By connecting the two outside terminals in series with any load circuit drawing between ten milliamperes and one ampere operating from any voltage between 19 volts and 288 volts AC or DC, the 438U turns that load circuit into a delay-on-make timing circuit. The timing period is set by an external resistor across the center two terminals, and permits the 438U to be adjusted from 1 second to 1000 seconds, and the 438U-1 to be adjusted from 2 seconds to 2000 seconds. The value of the external timing resistor ranges from 0 ohms to 10 meg ohms. After the load circuit has energized a new cycle can be repeated by removing and re-applying the operating voltage.

Mechanical

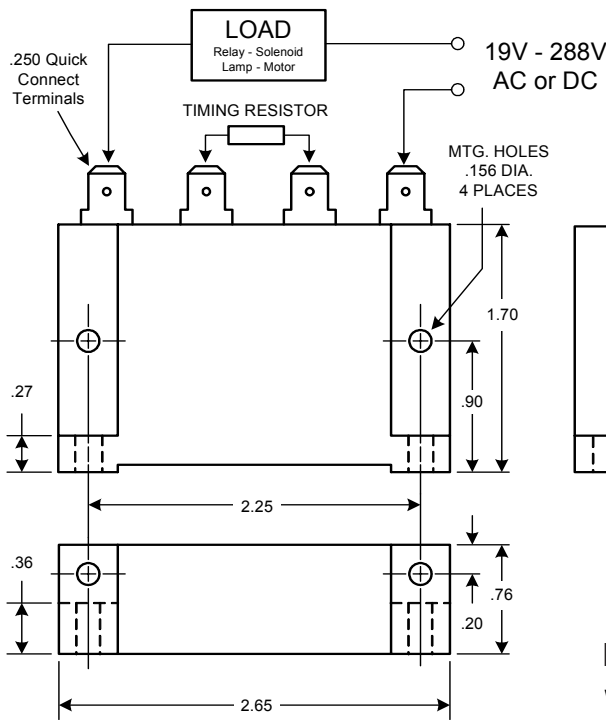

Timing Diagram

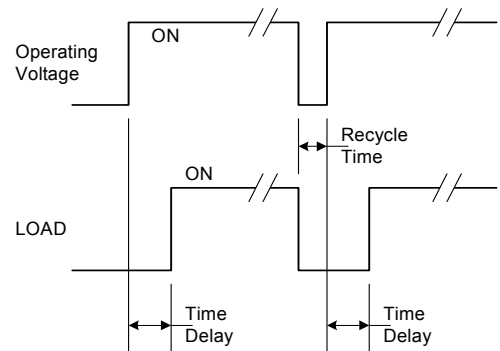

Finding The Value Of The Timing Resistor For Any Timing Interval From 1 second To 1000 Seconds For The 438U

A short circuit across the center two terminals will produce a 1 second interval. To increase the interval, increase resistor by 10,000 ohms for each additional second required. As an example: To find the value of the resistor for 300 seconds, subtract 1 from the 300 and multiply the answer by 10,000 ohms to get a value of 2,990,000 ohms, or 2.99 meg. As a practical matter you would select a 3 meg ohm resistor and connect it across the center two terminals. Time is doubled for the model 438U-1.

How The 438U Works

When the operating voltage is first applied to the series combination of the 438U and the load circuit, the 438U is OFF, and appears like a large resistor permitting only leakage current to flow. The amount of leakage current is determined from the specifications at the working operating voltage. The load circuit should be analyzed to determine if the small amount of leakage current through it will cause the load to pickup during the OFF period of the 438U. In most cases the leakage current is well below the operating threshold of most load circuits such as relays, solenoids, lights, or motors. At the end of the delay period as determined by the value of the external timing resistor, the 438U turns ON, and full load current is permitted to flow through the load current. There is a small voltage drop across the 438U when it is ON. This voltage, should be subtracted from the operating voltage to determine if the load circuit can operate at the voltage permitted as a result of the series connection of the 438U and the load circuit.

VISIT OUR WEB SITE AT: www.artisancontrols.com

Notice: Artisan Controls Corporation assumes no responsibility for customers applications or product design. The information and data contained herein is the sole and exclusive property of Artisan Controls Corporation. Any duplication, misuse, or conversion of this information without the express written consent of Artisan Controls Corporation is illegal and will result in damages including court costs and attorney fees being assessed against the party misusing this property

Tel: 973-598-9400 • Fax: 973-598-9410 • Toll Free: 800-457-4950
Artisan Controls Corporation, 111 Canfield Ave., Bldg B15-18, Randolph, NJ, 07869, USA



Solid State Timers and Controllers

Specifications

Operating Voltage: 19 to 288 Volts AC 50/60 Hz or DC.

Timing Mode: Delay-On-Make - timing period set by external resistor.

Timing Range: 438U 1 to 1000 seconds with 10 Meg external resistance range
438U-1 2 to 2000 seconds with 10 Meg external resistance range

Timing Tolerance: ±10%.

Timing Variation: ±15% worst case at any combination of voltage and temperature.

Repeatability Of Timing Period: ±1% nominal.

Recycle Time: 50 milliseconds if output is ON, 200 milliseconds during a timing cycle while output is OFF.

Output Rating: 10 milliamperes to 1 ampere inductive with inrush current to 25 amperes for 8 milliseconds.

Output Voltage Drop in "ON" State: 4 volts maximum.

Leakage Current in "OFF" State: 0.6 mA @ 24V, 1.8 mA @48V, 5.4 mA @120V, 11.4 mA @ 240V.

Transient Protection: Maximum transient voltage protection is 6000 volts as delivered through a source resistance of 30 ohms with a maximum duration of 8.3 milliseconds.

Operating Temperature: -20°C to +85°C


Humidity: 95% condensing

Terminations: Four (4) .25 Faston type.

Agency Recognition: UL E47858 - ATNZ2 (US), ATNZ8 (Can), NKCR2 (US), NKCR8 (Can),
NSN 4935-01-053-7709, 5945-01-256-0295, 5999-01-113-0824.

Data Sheet Revision Date: January 16, 2006

External Resistor Timing Curve

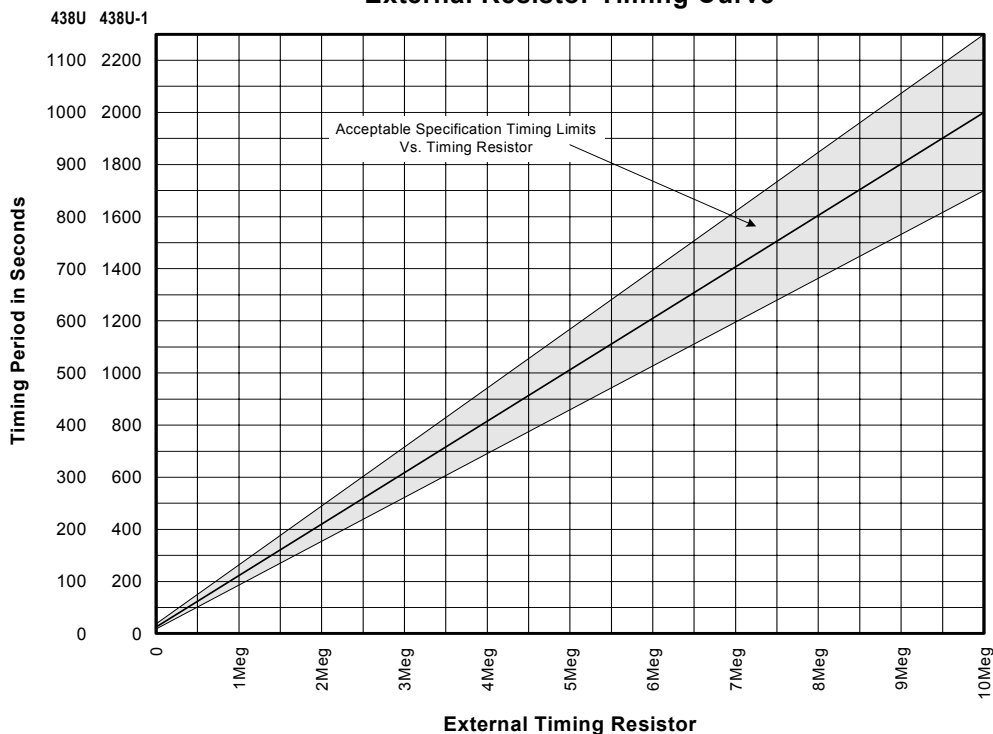

Ordering Information

Part Number	Time Range	Operating Voltage
438U	1 - 1000 Seconds	19V - 288V
438U-1	2 - 2000 Seconds	AC or DC

VISIT OUR WEB SITE AT: www.artisancontrols.com

Notice: Artisan Controls Corporation assumes no responsibility for customers applications or product design. The information and data contained herein is the sole and exclusive property of Artisan Controls Corporation. Any duplication, misuse, or conversion of this information without the express written consent of Artisan Controls Corporation is illegal and will result in damages including court costs and attorney fees being assessed against the party misusing this property

Tel: 973-598-9400 • Fax: 973-598-9410 • Toll Free: 800-457-4950
Artisan Controls Corporation, 111 Canfield Ave., Bldg B15-18, Randolph, NJ, 07869, USA