

Features:

- ✍ 13 Functions
- ✍ 10 Time Ranges
- ✍ Front knobs for Time Range, Time Scale & Mode Setting
- ✍ Slim, Space Saving Design
- ✍ DIN Rail Mount

Size: DIN 17.5mm

Certifications:



Technical Specifications

Input Specifications

Accuracy	Setting: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ (F.S. = Full Scale)
Reset	Reset time < 100 msec

Output Specifications

Output Contact	SPDT (1 C/O)
Contact Rating	NO/5A, NC/3A@250V AC

Functional Specifications

Modes	On delay (A) Interval (B) Cyclic equal OFF first (C) Cyclic equal ON first (Ci) Pulse output, 500ms fixed (D) Delay on break (E) Delay on make / Delay on break (F) Interval after break (H) Single shot (I) Retriggerable Single shot (J) Latching relay (K) Delay with Totalise (Ai) Interval with totalise (Bi)
Time Ranges	0.1 - 1 sec, 0.3 - 3 sec, 1 - 10 sec, 3 - 30 sec 0.1 - 1 min, 0.3 - 3 min, 1 - 10 min, 3 - 30 min 0.1 - 1 hr, 0.3 - 3 hr


Supply Voltage

Supply Voltage	20-240V AC 12-240V DC AC : (50 / 60 Hz)
Power Consumption	4VA max

Environmental Specifications


Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	95% RH
Weight	2.257 oz.
Protection Level	NEMA 12

Dimensions

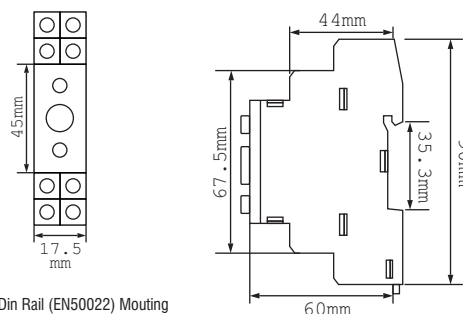

Symmetrical 35mm Din Rail (EN50022) Mounting

Terminal Connections

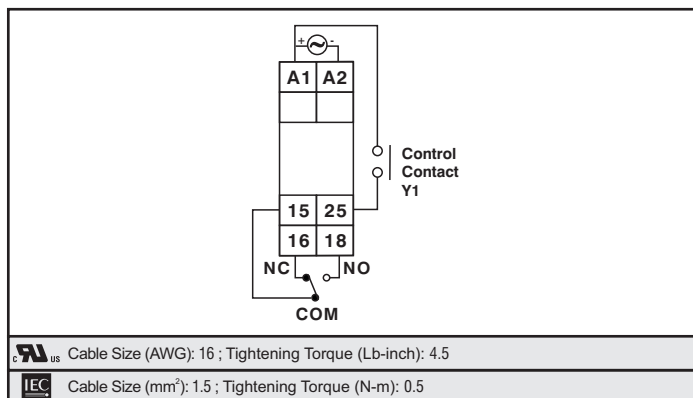

Ordering Information

Part No.	Supply Voltage	Certification	
		CE	UL
175MU	20-240V AC 12-240V DC	■	■

Timing Diagram

