




- compact and space saving design
- 100% speed controllible through auto transformers
- Easy air volume control via large range of control products based on pressure and temperature
- Motor protection through thermal contacts as standard



| Type | U [Volt] | f [Hz] | Curve | P _i [kW] | I _N [A] | n [min ⁻¹] | t _r [°F] | t _r [°C] | C [μF] | ΔI [%] | I _A /I _N | ▲ | ★ | Ⓜ [kg] |
|-----------------|----------|--------|-------|---------------------|--------------------|------------------------|---------------------|---------------------|--------|--------|--------------------------------|----|--------|--------|
| DRAD 279-4 IP54 | 3~460Y | 60 | A | 2.20 | 3.60 | 1400 | 104 | 40 | - | - | 2.9 | 54 | 01.005 | 27 |
| DRAD 279-4 IP54 | 3~230Δ | 60 | B | 2.00 | 6.20 | 1300 | 104 | 40 | - | - | 2.9 | 54 | 01.006 | 27 |
| DRAD 279-4 IP54 | 3~400D | 50 | C | 1.80 | 3.40 | 1170 | 120 | 50 | - | - | 2.7 | 54 | 01.005 | 27 |

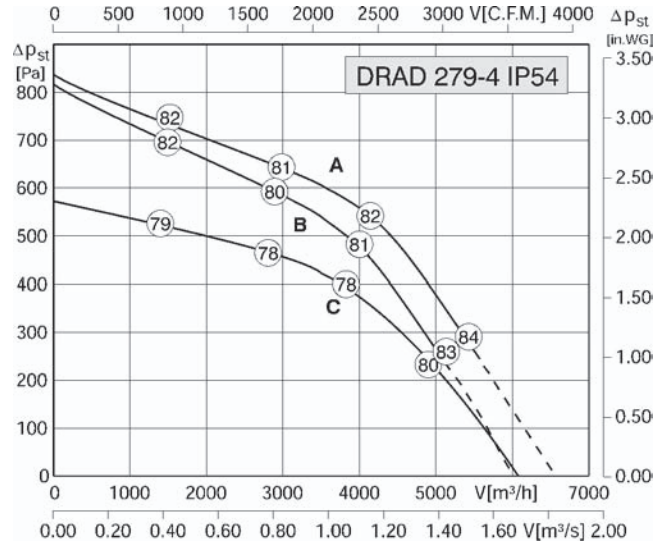