


LIQUID LEVEL CONTROLS - DUAL PROBE

Provides high and low sensing with Pump Up or Pump Down capabilities. Standard octal plug-in housing. Probe and sensing circuit are isolated from line voltage through a transformer. Probe is driven by AC signal to prevent plating. Output is an electro-mechanical relay rated 10 amps.

Mfr. No.	Logic Type	Input Voltage
LNC-00DLA-447	"A" Pump Down	24VAC
LNC-00DLA-441	"A" Pump Down	120VAC
LNC-00DLA-445	"A" Pump Down	230VAC
LNC-00DLB-447	"B" Pump Up	24VAC
LNC-00DLB-441	"B" Pump Up	120VAC
LNC-00DLB-445	"B" Pump Up	230VAC

ACCESSORIES

Mfr. No.	Description
LLH-01138-010	Probe holder
LLH-11383-010	Probe holder with ground
LLP-06.00-OSS	Probe, 6" long, 1/4" dia., SS
LLP-12.00-OSS	Probe, 12" long, 1/4" dia., SS
LLP-24.00-OSS	Probe, 24" long, 1/4" dia., SS
MSO-0008P-012	Octal socket, back panel mount
ASY-STRAP-7.00L	Hold down strap for control

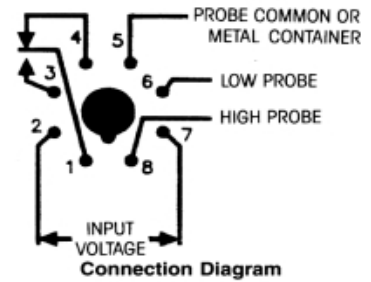

DUST COLLECTOR CONTROLS

MODELS T2003 - T2032

Input power is applied to the control at all times. For "On Demand" cleaning, closure of isolated control contacts (pressure switch) initiates the "Off" time. At the end of the off time the control energizes solenoid no. 1 to provide a cleaning pulse; it then transfers to the next compartment initiating the off time again. This cycle continues until the control contacts open. The control remembers the last output activated and will activate the next one in line when the control contacts reclose. For "continuous" cleaning the pressure switch terminals should be shorted together. A program wire allows for field selection of number of outputs required.



Off Time: Range A—adjustable from 1.5 to 30 seconds. **Off Time:** Range B—adjustable from 8.5 to 180 seconds. **Output:** Solid-state switch rated at 200 VA max. per output.

Mfr. No.	Max. No. Outputs	Input Voltage (VAC)	Dimensions		UL File No.	CSA File No.
			Length (in)	Width (in)		
DNC-T2003-A10	3	120	6.75	4.875	E-65038	LR-33434
DNC-T2003-B10	3	120	6.75	4.875	E-65038	LR-33434
DNC-T2006-A10	6	120	8.75	6.875	E-65038	LR-33434
DNC-T2006-B10	6	120	8.75	6.875	E-65038	LR-33434
DNC-T2010-A10	10	120	8.75	6.875	E-65038	LR-33434
DNC-T2010-B10	10	120	8.75	6.875	E-65038	LR-33434
DNC-T2020-A10	20	120	10.75	8.875	E-65038	LR-33434
DNC-T2020-B10	20	120	10.75	8.875	E-65038	LR-33434
DNC-T2032-A10	32	120	12.75	10.875	E-65038	LR-33434
DNC-T2032-B10	32	120	12.75	10.875	E-65038	LR-33434
DNC-T2006-A220	6	220	8.75	6.875	E-65038	LR-33434
DNC-T2006-B220	6	220	8.75	6.875	E-65038	LR-33434
DNC-T2010-A220	10	220	8.75	6.875	E-65038	LR-33434
DNC-T2010-B220	10	220	8.75	6.875	E-65038	LR-33434
DNC-T2020-A220	20	220	10.75	8.875	E-65038	LR-33434
DNC-T2020-B220	20	220	10.75	8.875	E-65038	LR-33434

NEMA 4 ENCLOSURES

Mfr. No.	Description/ Required Size (in.)
BOX-A0806-CHNF	8 x 6 x 3 1/2
BOX-A1008-CHNF	10 x 8 x 4
BOX-A1210-CHNF	12 x 10 x 5
BOX-A1412-CHNF	14 x 12 x 6
MSW-ODPST-011	Switch
ASL-OORED-NEMA4	Red lamp