



CABLE TIES, CLAMPS, PUSH MOUNT TIES AND MARKER TIES SELF-LOCKING, NYLON CABLE TIES—TOOL OR HAND INSTALLED

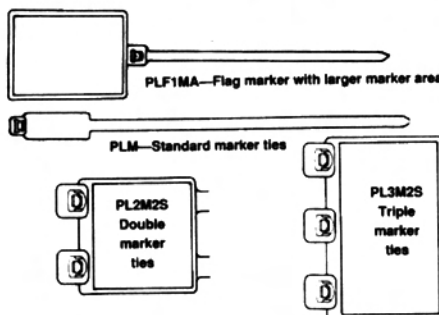

Mfr. No.†	Max. Bundle Diam. (in.)	Approx. Length (in.)	Std. Pkg.	Std. Ctn.
PLT6SM-C	.60	2.8	100	1000
PLT7M-C	.68	3.1	100	1000
PLT1M-C	.87	3.9	100	1000
PLT1.5M-C	1.25	5.6	100	1000
PLT2M-C	2.00	8.0	100	1000
PLT1.5I-C	1.38	5.6	100	1000
PLT2I-C	2.00	8.0	100	1000
PLT2.5I-C	2.50	9.7	100	1000
PLT3I-C	3.00	11.4	100	1000
PLT4I-C	4.00	14.6	100	1000
PLT1S-C	1.00	4.8	100	1000
PLT1.5S-C	1.50	6.3	100	1000
PLT2S-C	1.88	7.4	100	1000
PLT2.5S-C	2.50	9.8	100	1000
PLT3S-C	3.00	11.5	100	1000
PLT4S-C	4.00	14.5	100	1000
PLT4.5S-C	4.50	15.5	100	1000
PLT5S-C	5.00	17.5	100	500
PLT2H-L	2.00	8.4	50	500
PLT2.5H-L	2.50	9.8	50	500
PLT3H-L	3.00	11.4	50	500
PLT4H-L	4.00	14.5	50	500
PLT6H-L	6.00	21.9	50	1000
PLT7H-L	7.00	24.7	50	500
PLT8H-L	8.00	27.6	50	500
PLT9H-L	9.00	30.5	50	500
PLT10H-L	10.00	34.3	50	1000
PLT5H-L	5.00	17.7	50	500
PLT6H-L	6.00	20.9	50	500
PLT8H-L	9.00	30.6	50	500
PLT13H-Q	13.00	43.4	25	500

†Mfr. number shown for Standard Color, Natural Nylon. For other colors and materials contact distributor.

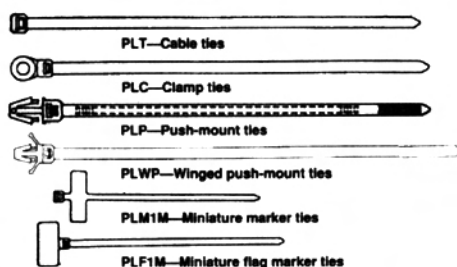

LASHING TIES



Mfr. No.*	Max. Bundle Diam. (in.)	Approx. Length (in.)	Std. Pkg.	Std. Ctn.
PLT2EH-Q0	2.00	9.0	25	250
PRT2EH-Q0	2.00	9.0	25	250
PRT5EH-Q0	5.00	20.1	25	250
PRT5EH-Q0	5.00	20.1	25	250
PLT6EH-Q0	6.00	22.2	25	250
PRT6EH-Q0	6.00	22.2	25	250
PLT8EH-Q0	8.00	28.3	25	250
PRT8EH-Q0	8.00	28.3	25	250
PLT10EH-Q0	10.00	34.2	25	250
PRT10EH-Q0	10.00	34.2	25	250
PLT12EH-Q0	12.00	40.1	25	500
PRT12EH-Q0	12.00	40.1	25	500

*EH = Extra Heavy.

Mfr. No.†	Max. Bundle Diam. (in.)	Approx. Length (in.)	Std. Pkg.	Std. Ctn.
PLC1M-S4-C	.75	4.3	100	1000
PLC1.5I-S8-C	1.25	6.1	100	1000
PLC2S-S6-C	1.84	7.9	100	1000
PLC2S-S10-C	1.84	7.9	100	1000
PLC3S-S10-C	3.00	12.0	100	1000
PLC4S-S10-C	4.00	15.0	100	1000
PLC2H-S25-L	2.00	9.0	50	500
PLC3H-S25-L	3.00	12.0	50	500
PLC4H-S25-L	4.00	15.1	50	500
PLP1.5I-C	1.25	6.1	100	1000
PLP1S-C	1.00	5.3	100	1000
PLP1.5S-C	1.50	6.7	100	1000
PLP2S-C	1.75	7.9	100	1000
PLWP1M-C	.87	4.3	100	1000
PLWP1.5I-C	1.25	6.0	100	1000
PLWP1S-C	1.00	5.3	100	1000
PLWP1.5S-C	1.50	6.7	100	1000
PLWP2S-C	1.75	7.8	100	500
PLM1M-C	.75	3.9	100	1000
PLF1M-C	.75	4.3	100	1000
PLF1MA-C	.75	5.1	100	1000
PLM2M-C	2.00	8.0	100	1000
PLM2S-C	1.75	7.4	100	1000
PLM4S-C	4.00	14.6	100	1000
PL2M2S-L	1.75	7.4	50	500
PL3M2S-L	1.75	7.4	50	500

†Mfr. number shown for Standard Color, Natural Nylon. For other colors and materials contact distributor.



STS2—Black handle. Installs miniature, intermediate and standard ties.



STH2—Red handle. Installs standard, light heavy, and heavy ties.



GS2B—Installs miniature, intermediate and standard ties.

GS4H—Installs standard and heavy ties.

GS4H/B—Installs standard, light and heavy ties. Also installs SUPERFLEXTM (SLT) Ties.

GS4EH—Installs heavy and extra heavy ties.

Contact us for information on Panduit's fully automatic and semi-automatic cable tie installation tool system. Ideal for medium and high volume production line requirements.

ASK FOR FULL-LINE CATALOG

CABLE MOUNTS AND WIRING ACCESSORIES FOR USE WITHOUT CABLE TIES



Mfr. No.	Max. Bundle Dia. (In.)	Size W x L (In.)	Mounting	Fig.	Std. Pkg.
ARC.68-A-Q14	0.68	1.00 x 1.00	Adhesive back	A	25
ACC19-A-C	0.19	0.75 x 0.62	Adhesive back	B	100
ACC38-A-C	0.38	1.00 x 1.00	Adhesive back	B	100
ACC62-A-C	0.62	1.12 x 1.25	Adhesive back	B	100
LWC25-A-C	.25	1.00 x .88	Adhesive Back	C	100
LWC38-A-C	.38	1.00 x 1.00	Adhesive Back	C	100
LWC50-A-L	.50	1.00 x 1.26	Adhesive Back	C	50
LWC25-H25-C	.25	.58 x .86	Push - 1/4" hole	C	100
LWC38-H25-C	.38	.58 x .94	Push - 1/4" hole	C	100
LWC50-H25-L	.50	.76 x 1.25	Push - 1/4" hole	C	50
BEC38-A-L	0.375 x 1.00	1.25 x 1.50	Adhesive back	D	50
BEC62-A-L	.625 x 1.00	1.24 x 1.46	Adhesive Back	D	50
BEC75-A-L	0.750 x 1.00	1.50 x 1.50	Adhesive back	D	50
BECP38H25-L	0.375 x 1.00	0.75 x 1.50	Push-1/4" hole	E*	50
BECP75H25-L	0.750 x 1.00	0.75 x 1.50	Push-1/4" hole	E*	50
AMC25-AT-C10	0.28	1.00 x 0.81	Adhesive back	F	100
LC3-A-C8	0.20 sq.	0.75 x 0.75	Adhesive back	G	100
LC5-A-C8	0.36 sq.	1.00 x 1.00	Adhesive back	G	100
LC10-A-L8	0.93 sq.	1.50 x 1.00	Adhesive back	G	50
MACC25-A-C	0.25	0.53 x 0.79	Adhesive back	H	100
MACC62-A-C	0.62	0.75 x 1.18	Adhesive back	H	100
AJC12-A-C	0.12	1.00 x 0.86	Adhesive back	I	100
AJC19-A-C	0.19	1.25 x 0.89	Adhesive back	I	100
AJC25-A-C	0.25	1.50 x 0.92	Adhesive back	I	100
AJC31-A-C	0.31	1.75 x 1.23	Adhesive back	I	100
AJC38-A-C	0.38	2.00 x 1.28	Adhesive back	I	100
PMCC38H25-C	0.38	0.38 x 0.50	Push-1/4" hole	J*	100
TC3-5-C100	0.13	0.20 height	Nail	K	100
TC5-7-C100	0.21	0.31 height	Nail	K	100
TC7-10-C100	0.26	0.37 height	Nail	K	100
TC10-14-C100	0.36	0.52 height	Nail	K	100
TC5X8-C100	0.20 x 0.30	0.30 height	Nail	L	100
CCS12-S8-C	0.12	0.38 wide	#8 screw	M	100
CCS19-S8-C	0.19	0.38 wide	#8 screw	M	100
CCH25-S10-C	0.25	0.50 wide	#10 screw	M	100
CCH38-S10-C	0.38	0.50 wide	#10 screw	M	100
CCH50-S10-C	0.50	0.50 wide	#10 screw	M	100
CCH75-S10-C	0.75	0.50 wide	#10 screw	M	100
VWS4218-C	0.18 x 0.42	0.18 x 0.42	Push-3/16" hole	N*	100
VWS4238-C	0.40 x 0.42	0.40 x 0.42	Push-3/16" hole	N*	100
VWS4274-C	0.74 x 0.42	0.74 x 0.42	Push-3/16" hole	N*	100
SICH25-C	0.25		Push-1/4" hole	O*	100
SICH38-C	0.38		Push-1/4" hole	O*	100
SICH50-C	0.50		Push-1/4" hole	O*	100


*For panel thickness: Fig. E-0.09" max.; Fig. J-0.105" max.; Fig. N-0.03" to 0.08"; Fig. O-0.03" to 0.10".

FLAT CABLE MOUNTS

FCC5-A-C8	Any dia.	0.56 x 1.00	Adhesive back	P**	100
FCC-A-C8	Any dia.	1.09 x 1.00	Adhesive back	P**	100
LPFCM14-A-C14	1.44 wide	0.50 x 2.56	Adhesive back	Q**	100
LPFCM22-A-C14	2.19 wide	0.50 x 3.31	Adhesive back	Q**	100
LPFCM34-A-C14	3.44 wide	0.50 x 4.56	Adhesive back	Q**	100
FCH2-A-C14	2.00 wide	1.00 x 2.50	Adhesive back	E	100
FCM1-A-C14	1.00 wide	1.00 x 1.17	Adhesive back	R**	100
FCM1.2-A-C14	1.25 wide	1.00 x 1.36	Adhesive back	R**	100
FCM2-A-C14	2.00 wide	1.00 x 2.23	Adhesive back	R**	100
FCM3.25-A-L14	3.25 wide	1.00 x 3.41	Adhesive back	R**	50

**Stack heights: Fig. P and R-up to 0.17"; Fig. Q-up to 0.105".

CABLE TIE ACCESSORIES

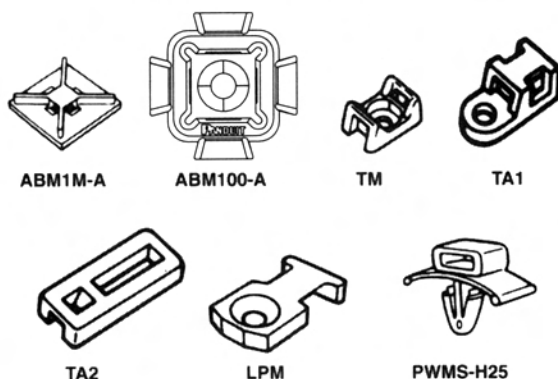

Adhesive backed and screw applied mounts.

Mfr. No.	Mtg.	Used With Cable Ties†	Std. Pkg.
ABM1M-A-C	Adh.	M	100
ABMM-A-C	Adh.	M, I	100
ABM2S-A-C	Adh.	M, I, S	100
ABM100-A-C	Adh.	M, I, S	100
TM1S6-C	#6	M	100
TM2S8-C	#8	M, I, S	100
TM3S10-C	#10	M, I, S, H	100
TA1S8-C	#8	M, I, S	100
TA2-C	#10	M, I, S	100
TP2-C	#10	M, I, S	100
TP4H-C	1/4"	M, I, S, H	100
LPMM-S2-C	#2	M	100
LPMM-S5-C	#5	M	100
LPMS-S8-C	#8	M, I, S	100
PWMS-H25-C	1/4" hole	M, I, S	100

†Tie cross-section; M = Miniature, I = Intermediate, S = Standard, H = Heavy (including LH, excluding .35" heavy) U. L. Recognized.


NYLON MARKER PLATES



Used with cable ties. Can be mounted in any direction. Marked with nylon marking pens. Also available in rolls of 1000.

Mfr. No.	Size (In.)	Used with Cable Ties	Std. Pkg.
MP150-C	1 1/2 x 3/4	Miniature,	100
MP175-C	1 3/4 x 3/4	Intermediate,	100
MP200-C	2 x 3/4	and Standard	100
MP250-C	2 1/2 x 3/4	Cross	100
MP350-C	3 1/2 x 3/4	Section	100
MP250W175-C	2 1/2 x 1 3/4		100

NYLON MARKING PENS



Provide fast drying, permanent marking on any nylon part.

Mfr. No.	Tip Style	Color
PFX-0	Fine	Black
PFX-2	Fine	Red
PX-0	Reg.	Black
PX-2	Reg.	Red
PX-10	Reg.	White

NYLON CIRCUIT BOARD POSTS & SUPPORTS



CBP series circuit board posts for board-to-board or board-to-chassis mounting. Accept up to 0.062" thick panel; have 0.156" dia. mounting hole. CBL series circuit board locking supports for board-to-chassis supporting. Types CBL18-C and CBL25-C for circuit boards; 0.062" thick panel with 0.156" dia. mounting holes. Type CBL50-C for chassis; 0.03" to 0.08" thick panel with 0.187" to 0.192" dia. mounting holes. All provide stability and are releasable/reusable. Sold in packages of 100.

Mfr. No.	Std. Height (In.)
CBP12-C	0.125
CBP25-C	0.250
CBP37-C	0.375
CBP50-C	0.500
CBP75-C	0.750
CBP100-C	1.000
CBL18-C	0.180
CBL25-C	0.250
CBL50-C	0.500

NYLON WIRE STANDOFFS



Ideal for retaining wires, cable, components or tubing away from panel or conductive chassis. Finger-grip flange can be locked/unlocked. Hand installed in pre-drilled panel hole. Fit 0.187" to 0.192" dia. hole on 0.03" to 0.08" thick panel. UL recognized. Sold in packages of 100.

Mfr. No.	D (In.)	H (In.)
WS25-25-C	0.25	0.25
WS25-50-C	0.25	0.50
WS25-75-C	0.25	0.75
WS35-25-C	0.35	0.25
WS35-50-C	0.35	0.50
WS35-75-C	0.35	0.75
WS50-25-C	0.50	0.25
WS50-50-C	0.50	0.50
WS50-75-C	0.50	0.75
WS75-25-C	0.75	0.25
WS75-50-C	0.75	0.50
WS75-75-C	0.75	0.75

TWISTER PUSH MOUNTS



TPM mounts accept bundles up to .62" Recommended hole size, 5/32 - 3/16", recommended panel thickness .025 - .105". Twist ends to lock and release. Sold in packages of 100.

Mfr. No.	Standard Height (In.)
TPM-16-C	.00
TPM5-16-C	.20
TPM10-16-C	.39
TPM15-16-C	.59
TPM20-16-C	.79
TPM25-16-C	.98
TPM30-16-C	1.18