


PAN-TERM® DISCONNECTS

MALE COUPLERS (NYLON INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DNF18-250FIM-C	22-18	.250 x .032	100
DNF14-250FIM-C	16-14	.250 x .032	100

FEMALE COUPLERS (NYLON INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DNF18-250FIB-C	22-18	.250 x .032	100
DNF14-250FIB-C	16-14	.250 x .032	100

DISCOGRIP™—INSULATED CRIMP MALE DISCONNECTS (PREMIUM NYLON FULLY INSULATED) (DOUBLE CRIMP APPLICATIONS)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DPF18-250FIM-C	22-18	.250 x .032	100
DPF14-250FIM-C	16-14	.250 x .032	100

DISCOGRIP™—INSULATED CRIMP MALE DISCONNECTS (PREMIUM NYLON FULLY INSULATED) (DOUBLE CRIMP APPLICATIONS)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DPF18-250FIMB-L	22-18	.250 x .032	50
DPF14-250FIMB-L	16-14	.250 x .032	50

DISCOGRIP™—INSULATED CRIMP FEMALE DISCONNECTS (PREMIUM NYLON FULLY INSULATED) (DOUBLE CRIMP APPLICATIONS)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DPF18-110FIB-C	22-18	.110 x .020	100
DPF18-111FIB-C	22-18	.110 x .020	100
DPF18-205FIB-C	22-18	.205/.187 x .020	100
DPF18-206FIB-C	22-18	.205/.187 x .020	100
DPF18-250FIB-C	22-18	.250 x .020	100
DPF14-205FIB-C	16-14	.205/.187 x .020	100
DPF14-206FIB-C	16-14	.205/.187 x .020	100
DPF14-250FIB-C	16-14	.250 x .020	100

FEMALE DISCONNECTS (NYLON FULLY PRE-INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DNF18-110FIB-C	22-18	.110 x .032	100
DNF18-111FIB-C	22-18	.110 x .020	100
DNF18-205FIB-C	22-18	.205/.187 x .032	100
DNF18-206FIB-C	22-18	.205/.187 x .020	100
DNF18-250FIB-C	22-18	.250 x .032	100
DNF14-205FIB-C	16-14	.205/.187 x .032	100
DNF14-206FIB-C	16-14	.205/.187 x .020	100
DNF14-250FIB-C	16-14	.250 x .032	100
DNF10-250FIL-L	12-10	.250 x .032	50

FEMALE DISCONNECTS—FUNNEL ENTRY (NYLON INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DNF18-110-C	22-18	.110 x .032	100
DNF18-111-C	22-18	.110 x .020	100
DNF18-187-C	22-18	.187 x .032	100
DNF18-188-C	22-18	.187 x .020	100
DNF18-205-C	22-18	.205/.187 x .032	100
DNF18-206-C	22-18	.205/.187 x .020	100
DNF18-250-C	22-18	.250 x .032	100
DNF14-187-C	16-14	.187 x .032	100
DNF14-188-C	16-14	.187 x .020	100
DNF14-205-C	16-14	.205/.187 x .032	100
DNF14-206-C	16-14	.205/.187 x .020	100
DNF14-250-C	16-14	.250 x .032	100

FEMALE DISCONNECTS—FUNNEL ENTRY (NYLON INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DNF14-110-C	16-14	.110 x .032	100
DNF14-111-C	16-14	.110 x .020	100

FEMALE DISCONNECTS—BUTTED SEAM (VINYL INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DV18-187B-C	22-18	.187 x .032	100
DV18-188B-C	22-18	.187 x .020	100
DV18-205B-C	22-18	.205 x .032	100
DV18-206B-C	22-18	.205 x .020	100
DV18-250B-C	22-18	.250 x .032	100
DV10-250-L	12-10	.250 x .032	50


FEMALE DISCONNECTS—BUTTED SEAM (VINYL INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DV14-187B-C	16-14	.187 x .032	100
DV14-188B-C	16-14	.187 x .020	100
DV14-205B-C	16-14	.205 x .032	100
DV14-206B-C	16-14	.205 x .020	100
DV14-250B-C	16-14	.250 x .032	100

PAN-TERM® TERMINALS AND INSTALLATION TOOLS


VINYL INSULATED (FUNNEL ENTRY)

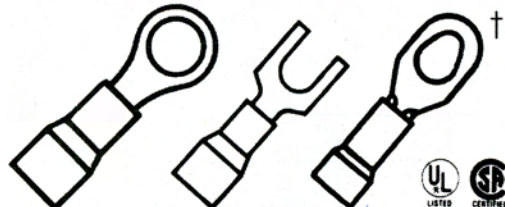

Mfr. No.	Wire Range	Stud Size	Std. Pkg.
PV22-2R-C*	26-22	#2	100
PV22-4R-C*	26-22	#4	100
PV22-6R-C*	26-22	#6	100
PV22-8R-C*	26-22	#8	100
PV22-10R-C	26-22	#10	100
PV18-4R-C	22-18†	#4	100
PV18-6R-C*	22-18†	#6	100
PV18-8R-C*	22-18†	#8	100
PV18-10R-C*	22-18†	#10	100
PV18-14R-C*	22-18†	1/4"	100
PV18-56R-C	22-18†	5/16"	100
PV18-38R-C	22-18†	3/8"	100
PV18-610R-C	22-18†	6, 8, 10†	100
PV14-4R-C	16-14†	#4	100
PV14-6R-C*	16-14†	#6	100
PV14-6RN-C*	16-14†	#6	100
PV14-8R-C*	16-14†	#8	100
PV14-10R-C*	16-14†	#10	100
PV14-14R-C*	16-14†	1/4"	100
PV14-56R-C	16-14†	5/16"	100
PV14-38R-L	16-14†	3/8"	50
PV14-610R-C	16-14†	6, 8, 10†	100
PV10-6R-L*	12-10†	#6	50
PV10-8R-L*	12-10†	#8	50
PV10-10R-L*	12-10†	#10	50
PV10-14R-L*	12-10†	1/4"	50
PV10-56R-L	12-10†	5/16"	50
PV10-38R-L	12-10†	3/8"	50

* Also available in fork tongues. To order, substitute F instead of R in No. (i.e. PV18-6F-C); same price applies. † Multiple stud tongue design ‡ UL and CSA Listed

NON-INSULATED (BRAZED SEAM)



Mfr. No.	Wire Range	Stud Size	Std. Pkg.
P22-2R-C*	26-22	#2	100
P22-4R-C*	26-22	#4	100
P22-6R-C*	26-22	#6	100
P22-8R-C*	26-22	#8	100
P22-10R-C	26-22	#10	100
P18-4R-C	22-18†	#4	100
P18-6R-C*	22-18†	#6	100
P18-8R-C*	22-18†	#8	100
P18-10R-C*	22-18†	#10	100
P18-14R-C*	22-18†	1/4"	100
P18-56R-C	22-18†	5/16"	100
P18-38R-C	22-18†	3/8"	100
P14-4R-C	16-14†	#4	100
P14-6R-C*	16-14†	#6	100
P14-8R-C*	16-14†	#8	100
P14-10R-C*	16-14†	#10	100
P14-14R-C*	16-14†	1/4"	100
P14-56R-C	16-14†	5/16"	100
P14-38R-C	16-14†	3/8"	100
P10-8R-L*	12-10†	#8	50
P10-10R-L*	12-10†	#10	50
P10-14R-L*	12-10†	1/4"	50
P10-56R-L	12-10†	5/16"	50
P10-38R-L	12-10†	3/8"	50

* Also available in fork tongues. To order, substitute F instead of R in No. (i.e. P18-6F-C); same price applies. † UL and CSA Listed

CONTACT US FOR BULK PACKAGING
AND OTHER TERMINAL CONFIGURATIONS
OF PANDUIT TERMINAL PRODUCTS

NYLON INSULATED GRIP SLEEVE



Mfr. No.	Wire Range	Stud Size	Std. Pkg.
PN22-2R-C*	26-22	#2	100
PN22-4R-C*	26-22	#4	100
PN22-6R-C*	26-22	#6	100
PN22-8R-C*	26-22	#8	100
PN22-10R-C	26-22	#10	100
PN18-4R-C	22-18†	#4	100
PN18-4RN-C	22-18†	#4	100
PN18-6R-C*	22-18†	#6	100
PN18-6RN-C	22-18†	#6	100
PN18-8R-C*	22-18†	#8	100
PN18-8RN-C	22-18†	#8	100
PN18-10R-C*	22-18†	#10	100
PN18-14R-C*	22-18†	1/4"	100
PN18-56R-C	22-18†	5/16"	100
PN18-38R-C	22-18†	3/8"	100
PN14-4R-C	16-14†	#4	100
PN14-6R-C*	16-14†	#6	100
PN14-6RN-C	16-14†	#6	100
PN14-8R-C*	16-14†	#8	100
PN14-10R-C*	16-14†	#10	100
PN14-14R-C*	16-14†	1/4"	100
PN14-56R-C	16-14†	5/16"	100
PN14-38R-L	16-14†	3/8"	50
PN10-8R-L*	12-10†	#8	50
PN10-10R-L*	12-10†	#10	50
PN10-14R-L	12-10†	1/4"	50
PN10-14F-L	12-10†	1/4"	50
PN10-56R-L	12-10†	5/16"	50
PN10-38R-L	12-10†	3/8"	50

* Also available in fork tongues. To order, substitute F instead of R in No. (i.e. PN18-6F-C); same price applies. † UL and CSA Listed.

HEAT SHRINK INSULATED TERMINALS

RING TONGUE



Mfr. No.	Wire Range	Stud Size	Std. Pkg.
PH18-6R-Q	22-18	#6	25
PH18-8R-Q	22-18	#8	25
PH18-10R-Q	22-18	#10	25
PH18-14R-Q	22-18	1/4"	25
PH14-6R-Q	16-14	#6	25
PH14-8R-Q	16-14	#8	25
PH14-10R-Q	16-14	#10	25
PH14-14R-Q	16-14	1/4"	25
PH14-56R-Q	16-14	5/16"	25
PH14-38R-Q	16-14	3/8"	25
PH10-8R-E	12-10	#8	20
PH10-10R-E	12-10	#10	20
PH10-14R-E	12-10	1/4"	20
PH10-38R-E	12-10	3/8"	20
PH10-12R-E	12-10	1/2"	20

FORK TONGUE



Mfr. No.	Wire Range	Stud Size	Std. Pkg.
PH18-6F-Q	22-18	#6	25
PH18-8F-Q	22-18	#8	25
PH18-10F-Q	22-18	#10	25
PH14-6F-Q	16-14	#6	25
PH14-8F-Q	16-14	#8	25
PH14-10F-Q	16-14	#10	25
PH10-8F-E	12-10	#8	20
PH10-10F-E	12-10	#10	20


DISCONNECTS



Mfr. No.	Wire Range	Stud Type	Std. Pkg.
DNH18-250FIM-Q	22-18	Male	25
DNH18-250FIB-Q	22-18	Female	25
DNH14-250FIM-Q	16-14	Male	25
DNH14-250FIB-Q	16-14	Female	25
DNH10-250FI-E	12-10	Female	20


PAN-TERM® DISCONNECTS, ADAPTERS AND WIRE JOINTS

RIGHT ANGLE FEMALE DISCONNECTS (NYLON FULLY INSULATED)




Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DNFR18-205FIB-C	22-18	.205/.187 x .032	100
DNFR18-206FIB-C	22-18	.205/.187 x .020	100
DNFR18-250FIB-C	22-18	.250 x .032	100
DNFR14-205FIB-C	16-14	.205/.187 x .032	100
DNFR14-206FIB-C	16-14	.205/.187 x .020	100
DNFR14-250FIB-C	16-14	.250 x .032	100

RIGHT ANGLE FEMALE DISCONNECTS—BUTTED SEAM (NYLON INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DNFR18-205B-C	22-18	.205/.187 x .032	100
DNFR18-206B-C	22-18	.205/.187 x .020	100
DNFR18-250B-C	22-18	.250 x .032	100
DNFR14-205B-C	16-14	.205/.187 x .032	100
DNFR14-206B-C	16-14	.205/.187 x .020	100
DNFR14-250B-C	16-14	.250 x .032	100

RIGHT ANGLE FEMALE DISCONNECTS—BUTTED SEAM (NON-INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DR18-205B-C	22-18	.205/.187 x .032	100
DR18-206B-C	22-18	.205/.187 x .020	100
DR18-250B-C	22-18	.250 x .032	100
DR14-205B-C	16-14	.205/.187 x .032	100
DR14-206B-C	16-14	.205/.187 x .020	100
DR14-250B-C	16-14	.250 x .032	100

DISCONNECT ADAPTER (NON-INSULATED)



Mfr. No.	Tab Size (In.)	Std. Pkg.
D-250A-C	.250 x .032	100

MALE DISCONNECTS—FUNNEL ENTRY (NYLON INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DNF18-250M-C	22-18	.250 x .032	100
DNF14-250M-C	16-14	.250 x .032	100

MALE DISCONNECTS—FUNNEL ENTRY (NYLON INSULATED)



Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DNF10-250M-L	12-10	.250 x .032	50

MALE ADAPTERS—FUNNEL ENTRY (VINYL INSULATED)




Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
DV18-145M-C	22-18	.145 x .032	100
DV14-145M-C	16-14	.145 x .032	100

Non-Insulated—Braided Seam (Fig. M)

Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
D18-145M-C	22-18	.145 x .032	100
D14-145M-C	16-14	.145 x .032	100


PAN-TERM® SPLICES

BUTT SPLICE (NYLON INSULATED)




Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
BSN22-C	26-22	.075	100
BSN18-C	22-18	.115	100
BSN14-C	16-14	.148	100
BSN10-L	12-10	.205	50

BUTT SPLICE (VINYL INSULATED)




Mfr. No.	Wire Range	Tab Size (In.)	Std. Pkg.
BSV18X-C	22-18	.176	100
BSV14X-C	16-14	.202	100
BSV10X-L	12-10	.253	50

BUTT SPLICE (NON-INSULATED)



Mfr. No.	Wire Range	Std. Pkg.
BS22-C	26-22	100
BS18-C	22-18	100
BS14-C	16-14	100
BS10-L	12-10	50

HEAT SHRINK INSULATED SPLICES



Mfr. No.	Wire Range	Std. Pkg.
BSH18-Q	22-18	25
BSH14-Q	16-14	25
BSH10-E	12-10	20

Terminal Crimping & Wire Stripping Tools

CT-100 Crimping Tool



- General Purpose
- Economical
- Rugged
- Versatile

CT-160 Crimping Tool



CT-200 Crimping Tool




CST101 Wire Strippers




CST115 Wire Strippers




CONTOUR CRIMP™ CONTROLLED-CYCLE TOOLS



CT-1550



CT-1551



CT-1570

Part Number	Description	Pkg. Qty.
CT-100	Crimps most PANDUIT #26-#10 AWG insulated and non-insulated terminals, disconnects and splices. Cuts #4, #6, #8 and #10 screw sizes. Cuts and strips wire. Excellent all-around application tool of heat treated, finished steel with comfortable cushioned plastic grip handles.	1
CT-160	Crimps most PANDUIT #26-#10 AWG insulated and non-insulated terminals, disconnects and splices. Cuts 3 U.S. and 3 Metric screw sizes. Cuts and strips wire. Has insulation closure pocket.	1
CT-200	Forged Steel Tool. Crimps most PANDUIT #26-#10 AWG non-insulated terminals, disconnects and splices. Cuts wire.	1
CST101 Wire Strippers	"V" notch wire stripper. Strips and cuts 10-20 AWG (.8 - 2.6 mm2)	1
CST115 Wire Strippers	Plier nose stripper. Strips and cuts 10-20 AWG (.8 - 2.6 mm2)	1

Part Number	Description	Pkg. Qty.
CT-1525	Crimps PANDUIT #26-#22 AWG insulated terminals and splices, #22-#10 AWG fully insulated disconnects, and insulated parallel splices. Crimps specific PANDUIT #22-#14 AWG barrel insulated disconnects.	1
CT-1550	Crimps most PANDUIT #22-#10 AWG nylon and vinyl insulated terminals and splices. Crimps specific PANDUIT #22-#10 AWG nylon and vinyl insulated disconnects. The CT-1550 has the red/blue pocket closest to the pivot which provides a reduced crimp effort advantage for those who make mostly red/blue terminations.	1
CT-1551	Crimps most PANDUIT #22-#10 AWG nylon and vinyl insulated terminals and splices. Crimps specific PANDUIT #22-#10 AWG nylon and vinyl insulated disconnects. The CT-1551 has the yellow pocket closest to the pivot which provides a reduced crimp effort advantage for those who make mostly yellow terminations.	1
CT-1570	Crimps most PANDUIT #22-#10 AWG and 0,5-6,0 mm non-insulated terminals and disconnects. Crimps specific PANDUIT #22-#10 AWG and 0,5-6,0 mm non-insulated splices.	1