


DOMESTIC WALL PLUG-IN POWER SOURCES INPUT 120 V, 60 Hz

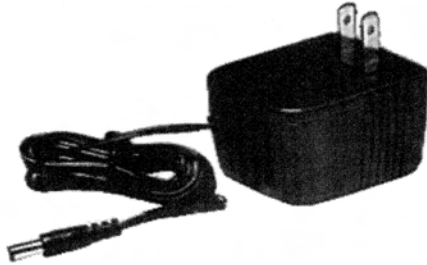

UL Listed

Mfg. No.	Rated Output		Size Code
	Volts	mA	

AC-DC UNREGULATED MODELS

STA-3530A	3.0 DC	400	1
STA-3530	3.0 DC	500	1
STA-3540	4.4 DC	400	1
STA-3560B	6.0 DC	100	1
STA-3560	6.0 DC	200	1
STA-3560A	6.0 DC	300	1
STA-4160	6.0 DC	600	2
STA-4160A	6.0 DC	800	2
STA-4860	6.0 DC	1000	3
STA-4860A	6.0 DC	1200	3
STA-5760	6.0 DC	2000	4
STA-3575	7.5 DC	100	1
STA-3575A	7.5 DC	300	1
STA-4175A	7.5 DC	500	2
STA-4875	7.5 DC	1000	3
STA-5775	7.5 DC	1500	4
STA-3590B	9.0 DC	100	1
STA-3590	9.0 DC	200	1
STA-3590A	9.0 DC	300	1
STA-4190A	9.0 DC	500	2
STA-4190F	9.0 DC	700	2
STA-4890	9.0 DC	1000	3
STA-4890A	9.0 DC	1200	3
STA-3512	12.0 DC	50	1
STA-3512C	12.0 DC	100	1
STA-3512B	12.0 DC	200	1
STA-4112B	12.0 DC	300	2
STA-4112	12.0 DC	400	2
STA-4112C	12.0 DC	500	2
STA-4812D	12.0 DC	600	3
STA-4812A	12.0 DC	1000	3
STA-5712	12.0 DC	1200	4
STA-4812	12.5 DC	800	3
STA-5713	13.5 DC	1300	4
STA-5713A	13.5 DC	1700	4
STA-4814	14.5 DC	800	3
STA-4815	15.0 DC	600	3
STA-5715	15.0 DC	1000	4
STA-3518	18.5 DC	80	1
STA-4120	20.0 DC	280	2
STA-3524	24.0 DC	50	1

AC-DC REGULATED MODELS

STA-4130*	3.0 DC	350	2
STA-4850	5.0 DC	600	9
STA-4190C*	9.0 DC	200	2
STA-4890B	9.0 DC	400	9
STA-4110A	10.0 DC	300	2
STA-300R	12.0 DC	200	2

AC-AC MODELS

STA-3545B	4.5 AC	300	1
STA-4190B	9.0 AC	300	2
STA-4190D	9.0 AC	500	2
STA-4110	10.0 AC	700	2
STA-3512E*	12.0 AC	100	1
STA-3512F*	12.0 AC	200	1
STA-4112A	12.0 AC	500	2
STA-4812B*	12.0 AC	850	3
STA-4116	16.0 AC	250	2
STA-4118*	18.0 AC	300	2
STA-4820*	20.0 AC	700	3
STA-4124	24.0 AC	300	3
STA-4824B	24.0 AC	450	3

AC-DC UNREGULATED DESK TOP MODELS

STA-6690	9.0 DC	3000	7
STA-6612	12.0 DC	2000	7
STA-6612A	12.0 DC	2500	7
STA-6612B	12.0 DC	3000	7
STA-5713AC	13.5 DC	1700	4
STA-6013A	13.5 DC	2100	5
STA-6613	13.5 DC	2400	7
STA-6615	15.0 DC	2000	7


Mfg. No.	Rated Output		Size Code
	Volts	mA	
STA-6618	18.0 DC	2000	7
STA-6624	24.0 DC	1500	7

AC-AC DESK TOP MODELS

STA-5760A*	6.0 AC	3300	4
STA-5790	9.0 AC	3400	4

*UL listed.

EUROPEAN WALL PLUG-IN POWER SOURCE INPUT 230 V, 50 Hz

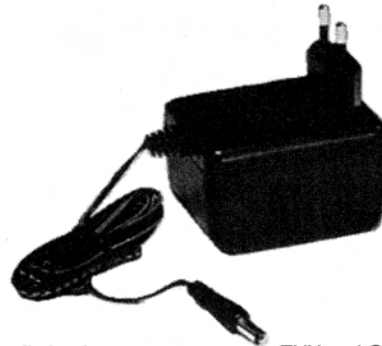

All European wall plug-in power sources are TUV and C.E certified.

Mfg. No.	Rated Output		Size Code
	Volts	mA	

AC-DC UNREGULATED MODELS

STAF-3924F	4.5 DC	350	6
STAF-1847F	4.8 DC	500	2
STAF-1848F	5.2 DC	1000	3
STAF-0381F	6.0 DC	500	2
STAF-0797F	6.0 DC	1000	3
STAF-2100F	6.2 DC	300	6
STAF-0834F	6.2 DC	350	2
STAF-2243F	7.5 DC	300	2
STAF-2223F	9.0 DC	200	6
STAF-3309F	9.0 DC	300	2
STAF-1058F	9.0 DC	500	2
STAF-0329F	9.0 DC	1000	3
STAF-3382F	12.0 DC	300	2
STAF-2343F	12.0 DC	500	3
STAF-1454F	12.0 DC	1000	4
STAF-1948F	12.0 DC	1200	4
STAF-0460F	12.6 DC	800	3
STAF-1059F	13.5 DC	1300	4
STAF-0354F	14.5 DC	800	3

AC-AC MODELS

STAF-1433F	2.9 AC	320	6
STAF-2099F	3.0 AC	120	6
STAF-0418F	4.5 AC	120	6
STAF-0437F	9.0 AC	130	6
STAF-2098F	24.0 AC	400	3

AC-DC UNREGULATED DESKTOP MODELS

STAF-2134F	13.5 DC	1700	5
STAF-3775F	13.5 DC	2100	8
STAF-3777F	13.5 DC	2400	8
STAF-3613F	14.0 DC	1400	5
STAF-1972F	15.0 DC	1000	4

DOMESTIC AND EUROPEAN

MODEL SIZE CHART

Size Code	L (In.)	W (In.)	H (In.)
1	2.2	1.7	1.5
2	2.5	2.0	1.6
3	2.8	2.2	1.9
4	3.3	2.5	2.2
5	3.7	2.8	2.2
6	2.2	1.7	1.4
7	4.7	3.1	2.6
8	4.7	3.2	2.6
9	3.5	2.4	1.9

OUTPUT TERMINATIONS

Compatible with Switchcraft PC-722A or 722A with 6 ft. output cord. Secondary plug size 2.1 x 5.5 mm. AC-DC models wired outside-positive; inside-negative.

17

POWER SUPPLIES & CONDITIONERS

STAR SERIES DESK TOP REGULATED POWER SOURCES



Reliable, regulated DC power supplies designed to keep operating heat away from components. Common applications for computers and peripherals, test equipment, modems, telephone answering machines, security systems, data communication products and cordless telephones. The Star Series of power supplies provides line filtering, short circuit and thermal protection. Single and Multiple outputs are available with 6' input and 6' output cords standard. 3 prong grounded input plug and rated for continuous duty. UL 1310 Listed, File No. E112433.

Specifications

Input Voltage: 120 VAC $\pm 10\%$ 60 Hz.


Combined Regulation: $\pm 5\%$.

Output Ripple: 50 mV max. (peak to peak).

Operating Temperature: -10°C to $+40^{\circ}\text{C}$.

Dielectric Test: 1500 VAC, rms.

Size: $4\frac{3}{4}$ " long $\times$ $3\frac{1}{8}$ " wide $\times$ $2\frac{1}{2}$ " high.

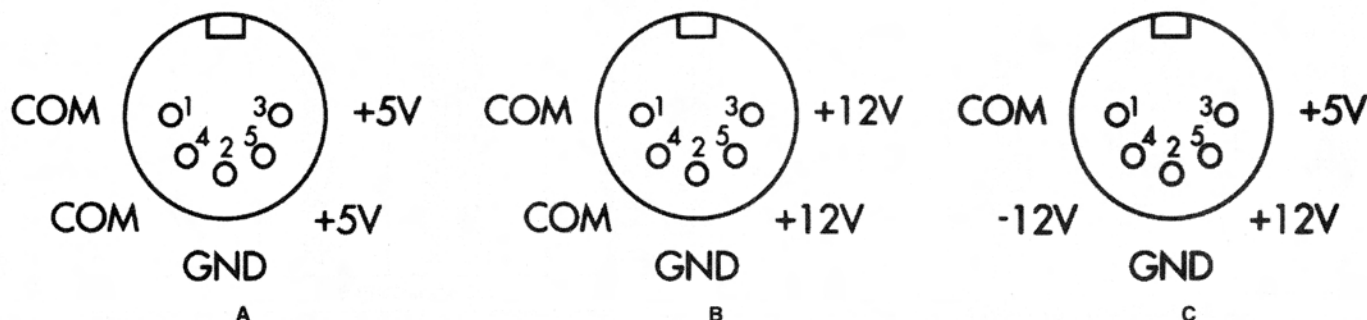

Mfg. No.	Outputs		
	1	2	3
STAR-9001*	+5 VDC, 1.0A		
STAR-9002*	+5 VDC, 1.5A		
STAR-9003†	+12 VDC, 1.0A		
STAR-9004†	+12 VDC, 1.2A		
STAR-9005‡	+5 VDC, 0.8A	+12 VDC, 0.2A	-12 VDC, 0.2A
STAR-9006‡	+5 VDC, 1.0A	+12 VDC, 0.2A	-12 VDC, 0.2A
STAR-9007‡	+5 VDC, 1.0A	+12 VDC, 0.3A	-12 VDC, 0.3A

*5 PIN DIN secondary connection, see figure A.

†5 PIN DIN secondary connection, see figure B.

‡5 PIN DIN secondary connection, see figure C.