


Model 330 & 360 OPERATE DELAY RELAYS



SPECIFICATIONS

MODEL	330	360
Supply Voltage	12, 24, 120 or 240 vac/dc	
Timing Range	1 - 10 seconds 1 - 60 seconds 1 - 180 seconds 1 - 300 seconds	0.1 - 102.3 seconds 1 - 1023 seconds 1 - 1023 minutes
Accuracy	± 5%	± 2%
Repeatability	± 2%	± 0.1%
Recycle Time	100 msec	20 msec
Contacts	DPDT	
Contact Rating	10A at 240vac resistive	
Transient Protection	2500 VRMS for 10 msec	
Operating Temperature	- 40° to +140° F	
Humidity Tolerance	0 - 97% w/o condensation	
Enclosure Material	ABS plastic	
Mounting	8-pin socket (order separately)	
Weight	5 oz.	
Agency Approval	UL Recognized and CSA Certified	UL Recognized and CSA Certified up to 120vac/dc

- Solid-State Design
- 10 Amp Relay Contacts
- 5-Year Factory Warranty

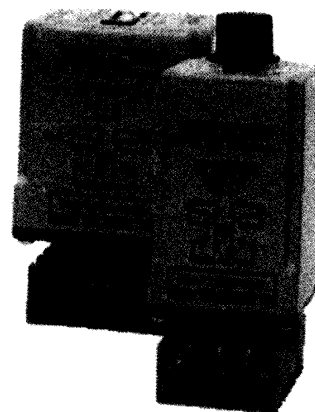

OPERATION

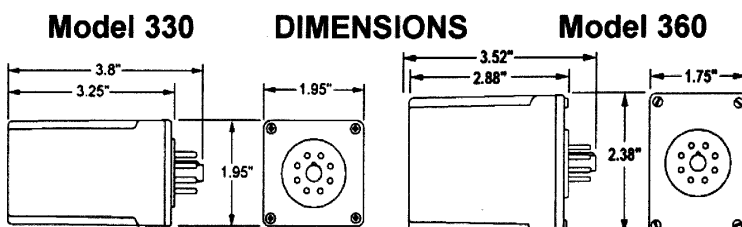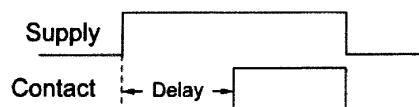


Models 331 & 361 RELEASE DELAY RELAYS

SPECIFICATIONS

MODEL	331	361
Supply Voltage	12, 24, 120 or 240 VAC/DC	
Timing Range	1 - 10 seconds 1 - 60 seconds 1 - 180 seconds 1 - 300 seconds	0.1 - 102.3 secs 1 - 1023 seconds 1 - 1023 minutes
Accuracy	± 5%	± 2%
Repeatability	± 2%	± 0.1%
Recycle Time	100 msec	20 msec
Contact Rating	DPDT 10A at 240VAC	
Transient Protection	2500 VRMS for 10 msec	
Operating Temp	- 40° to +140° F	
Humidity Tolerance	0 - 97% w/o condensation	
Enclosure Material	ABS plastic	
Mounting	11-pin socket (order separately)	
Weight	5 oz.	
Agency Approval	UL Recognized and CSA Certified up to 120VAC/DC	

- Solid-State Design
- Wide Variety of Voltage and Timing Ranges
- 5-Year Factory Warranty

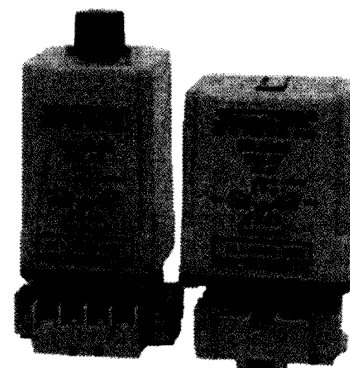

OPERATION

