



8600 SERIES MICROMINIATURE PUSHBUTTON SWITCHES



Rating—All Suffix—B Models: 0.4 VA max. at 20 V AC or DC max. **All 8632 Suffix Q Models:** 500 mA at 120 V AC or 28 V DC, 250 mA at 250 V AC (UL). **All 8633 Suffix Q Models:** 250 mA at 120 V AC or 28 V DC, 125 mA at 250 V AC. **Mounting Hole:** .172" (4,37) dia. () = momentary.

C&K Part No.	No. Poles	Switch Function Open-Closed	Fig.
8631ZQD2	SPST	Off-(On)	A
8631ZBD2	SPST	Off-(On)	A
8632ZQD2	SPST	Off-(On)	A
8633ZQE2	SPST	On-(Off)	A
8633ZBE2	SPST	On-(Off)	A
8631CQD2	SPST	Off-(On)	B
8631CBD2	SPST	Off-(On)	B
8632CQD2	SPST	Off-(On)	B
8632CBD2	SPST	Off-(On)	B

E020 SERIES SEALED SNAP-ACTING MOMENTARY PUSHBUTTON SWITCHES

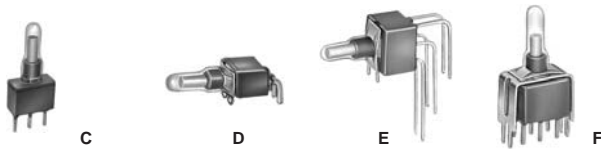

EX21 Models—Rating: 0.4 VA max. at 20 V AC or DC max. or 1 Amp at 20 V AC or 28 V DC. **EX25 Models—Rating:** 0.4 VA max. at 20 V AC or DC max. **Terminal Spacing:** .185" (4,70) typ.

C&K Part No.	No. Poles	Switch Function	Fig.
E121SD1CGE	SPDT	On-Mom	C
E125SD1CBE	SPDT	On-Mom	C
E221SD1CGE	DPDT	On-Mom	C
E225SD1CBE	DPDT	On-Mom	C
E121SD1AGE	SPDT	On-Mom	D
E125SD1ABE	SPDT	On-Mom	D
E121SD1AV2GE	SPDT	On-Mom	E
E125SD1AV2BE	SPDT	On-Mom	E
E221SD1AV2GE	DPDT	On-Mom	F
E121SD1V3GE	SPDT	On-Mom	F
E125SD1V3BE	SPDT	On-Mom	F
E225SD1V3BE	DPDT	On-Mom	F

KN SERIES ULTRA-MINIATURE TACTILE SWITCHES



Rating: 1.0VA max. @ 5 - V DC min. SPST normally open, momentary. **Body Height:** KN11 - 1.6mm; KN01 - 1.63mm. Supplied in tape & reel packaging.

C&K Part No.	Operating Force	Operating Life
KN11B1FJM	120g	100K cycles
KN11B1DJM	200g	200K cycles
KN11B1NJM	450g	100K cycles
KN01P1DSAQ	200g	100K cycles
KN01P3LSAQ	400g	100K cycles


8020 SERIES SNAP-ACTING MOMENTARY PUSHBUTTON SWITCHES



8 x 21 Models—Rating: 1 Amp at 120 V AC or 28 V DC or 0.4 VA max. at 20 V AC or DC max. **8 x 25 Models—Rating:** 0.4 VA max. at 20 V AC or DC max. Epoxy seal. Terminal spacing: .185" (4,70) typ. **Hardware:** Nut, locking ring and lockwasher.

C&K Part No.	No. Poles	Switch Function Open-Closed	Fig.
8121SHZGE	SPST	On-Mom.	J
8125SHZBE	SPST	On-Mom.	J
8221SHZGE	DPDT	On-Mom.	J
8225SHZBE	DPDT	On-Mom.	J
8321SHZGE	3PDT	On-Mom.	J
8325SHZBE	3PDT	On-Mom.	J
8421SHZGE	4PDT	On-Mom.	J
8425SHZBE	4PDT	On-Mom.	J
8121J81ZGE22	SPDT	On-Mom.	K
8125J81ZBE22	SPDT	On-Mom.	K
8221J81ZGE22	DPDT	On-Mom.	K
8225J81ZBE22	DPDT	On-Mom.	K
8125J82ZBE22	SPDT	On-Mom.	L
8121J85ZGE223	SPDT	On-Mom.	M
8121SD9AGE	SPST	On-Mom.	N
8221SD9AGE	DPDT	On-Mom.	N
8125SD8ABE	SPDT	On-Mom.	N
8125SD9ABE	SPDT	On-Mom.	N

8060 SERIES PC MOUNTED ALTERNATE ACTION OR SNAP-ACTING MOMENTARY PUSHBUTTON SWITCHES

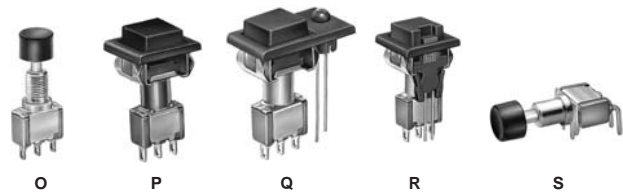

Rating: B = 0.4 VA max. at 20 V AC or DC max. Epoxy seal. G = 0.4 VA max. at 20 V AC or DC max. or 6 Amps at 120 V AC or 28 V DC; 3 Amps at 250 V AC (UL/CSA). Q = 6 Amps @ 120 V AC or 28 V DC; 3 Amps @ 250 V AC; Mom. = momentary. Terminal Spacing: 0.185" (4,70). * PC mount, right angle.

C&K Part No.	No. of Poles	Switch Function Open-Closed	Fig.
Alternate Action			
*8161SH9ABE2	SPDT	On-On	S
*8261SH9ABE2	DPDT	On-On	S
8161SHZGE	SPST	On-On	O
8261SHZGE	DPDT	On-On	O
8161J81ZGE22	SPDT	On-On	P
8161J82ZGE22	SPDT	On-On	Q
8261J81ZGE22	DPDT	On-On	P
8261J82ZGE22	DPDT	On-On	Q
8161J86ZGE223	SPST	On-On	R
8161SHZQE2	SPDT	On-On	O
8261J81ZQE22	DPDT	On-On	P
8261J82ZQE22	DPDT	On-On	Q
Snap-acting			
*8168SH9ABE2	SPDT	On-Mom.	S
8168SHZGE	SPST	On-Mom.	O
8168J81ZGE22	SPST	On-Mom.	P
8168J82ZGE22	SPDT	On-Mom.	Q
8168J86ZGE223	SPST	On-Mom.	R
8168SHZQE2	SPDT	On-Mom.	O
8168J81ZQE22	SPDT	On-Mom.	P
8168J86ZQE223	SPDT	On-Mom.	R