


A SERIES ROTARY SWITCHES



Housing dia.: 1.031" (26,19). **Rating:** Carry—5 Amps continuous. Switch—250 mA max. at 125 V AC or DC; 150 mA at 250 V AC or DC. **Hardware:** Nut, lockwasher, stop ring.

C&K Part No.	No. of Poles	No. Positions	Fig.
A11215RNZQ	SP	12	A
A20615RNZQ	DP	6	A
A30415RNZQ	3P	4	A
A40315RNZQ	4P	3	A
A11215RNCQ	SP	12	B
A20615RNCQ	DP	6	B
A30415RNCQ	3P	4	B
A40315RNCQ	4P	3	B

L SERIES MINIATURE SLIDE SWITCHES



Rating: 4 Amps at 125 V AC or 28 V DC, 2 Amps at 250 V AC, 0.5 Amp at 125 V DC (UL/CSA). **Housing Length:** .760" (19,30).

C&K Part No.	No. of Poles	Fig.
L102021ML04Q	SPDT	C
L202011MS02Q	DPDT	D
L212132MV02Q	DPDT-MOM	E

V SERIES POWER AND VOLTAGE-SELECT SLIDE SWITCHES

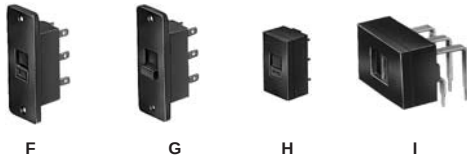


Fig. F-black, Fig. G, H & I-red. **Rating:** 10.1 Amps at 125 V AC, 5 Amps at 250 V AC (UL/CSA); 2.0 (0,5) Amps at 250 V AC. T85 (VDE). **Mounting Hole Spacing:** 1.338" (34,00).

C&K Part No.	No. Poles	Actuator Marking	Fig.
V80212SS05Q	DPDT	230/115	F
V80201SS05Q	DPDT	None	G
V80212MS02Q	DPDT	230/115	H
V80212MA08Q	DPDT	230/115	I

S SERIES SLIDE SWITCHES



Rating: 6 Amps at 125 V AC or 28 V DC. 6 Amps at 250 V AC, 1 Amp at 125 V DC (UL/CSA). **Mounting Hole Spacing:** 1.125" (28,58).

C&K Part No.	No. of Poles	Fig.
S102031SS03Q	SPDT	J
S102031MS02Q	SPDT	K
S202031SS03Q	DPDT	J
S202031MS02Q	DPDT	K

1000 SERIES SLIDE SWITCHES



Housing length: .500" (12,70). **Rating:** B models: 0.4 VA max. at 20 V AC or DC max. Q models: 6 Amps at 120 V AC or 28 V DC, 3 Amps at 250 V AC.

C&K Part No.	No. of Poles	Switch Function	Fig.
1101M1S3ZQE2	SPDT	On-None-On	L
1101M2S3ABE2	SPDT	On-None-On	M
1101M2S3AV2BE2	SPDT	On-None-On	N
1101M2S3CBE2	SPDT	On-None-On	O
1101M2S3CQE2	SPDT	On-None-On	O
1103M2S3CBE2	SPDT	On-Off-On	O
1103M2S3CQE2	SPDT	On-Off-On	O

A SERIES SNAP-ACTING SWITCHES



Rating: 15 Amps at 125 & 250 V AC; 3/4 HP at 125 V AC, 1 1/2 HP at 250 V AC; SPDT. Contacts are fine silver with .250" (6,35) quick-connect terminals. Mounting holes will accept pins or screws of .139" (3,53) dia. max. on 1.000" (25,40) centers. Contact separation is .020" (0,51).

C&K Part No.	Actuators	Operate Force (ounces)	Release Force (ounces)	Fig.
ASKHC2P04AC	Pushbutton	20 max.	3 min.	P
ASKHC2L04AC	Integral leaf	12 max.	1 min.	Q

LC SERIES SUBMINIATURE SNAP-ACTING SWITCHES



SPDT function. **Rating:** 1 Amp at 125 V AC or 30 V DC. UL recognized, CSA certified, VDE approved. **Contacts:** gold over copper alloy, with solder lug terminals. Mounting holes .068" (2,25) dia. on .375" (9,53) centers.

C&K Part No.	Actuators	Operate Force (grams)	Pretravel	Fig.
LCGGX1P00EC	Pin plunger	142	.03" (0,76)	R
LCGGX1T10EC	Standard lever	48	.14" (3,56)	S

TM SERIES MINIATURE SNAP-ACTING SWITCHES



Rating: 10 Amps at 125 & 250 V AC; 1/2 HP at 125 & 250 V AC; 1/2 Amp at 125 V DC; 1/4 Amp at 250 V DC. **Mechanical Life:** 1,000,000 cycles typ. **Operating Temperature:** -67°F to +302°F (-55°C to 150°C). **Housing:** Thermoplastic or general purpose phenolic (UL 94V-0). **Actuator:** Thermoplastic (UL 94V-0). **Movable and Stationary Contacts:** fine silver. **Terminals:** Brass CDA alloy C26000.

C&K Part No.	Actuators	Operate Force (grams)	Pretravel	Fig.
TMCGD6SP0040C	Pin plunger	75	.056" (1,42)	T
TMCGD6ST1440C	Simulated roller	75	.140" (3,56)	U
TMCGD6SA1040C	Lever roller	75	.070" (1,78)	V