

LTA-Series




The LTA-Series Mini Tippet Snap-in rocker switches are illuminated, single pole and double-insulated. These AC rated switches are also suitable for low voltage DC applications. A variety of actuators, colors and terminations can be specified with ratings up to 20 amps.





Rocker Switches




- Specifications**
- Certifications*: UL, CSA
 - Dielectric Strength: 1,000V (minimum)
 - Insulation Resistance: 100 Megohms (minimum)
 - Base Material: Nylon
 - Actuator Material: Nylon or Polycarbonate
 - Bezel Material: Nylon

* Due to ongoing technological advances, consult factory for certification specifics.

Dimensional Specifications: in. [mm]

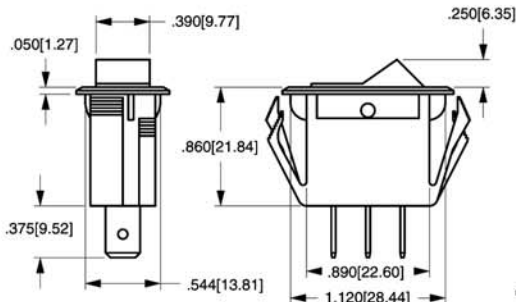

 .069[1.75] DIA .250[6.35]	 .156[3.96] DIA .375[9.52] .250[6.35]	 .055[1.40] DIA .250[6.35] .187[4.74]	 6.000[152.40] .500[12.70]
.250 TAB (Q.C.)	SOLDER LUG	.187 TAB (Q.C.)	INTEGRATED WIRE LEAD (no exposed conductors)
TERMINAL TYPE			



SERIES	RATING	TERMINATION	ACTUATOR COLOR	LENS COLOR ^{2,3}
LTA	20	1	-	T
OFF-NONE-ON SINGLE POLE	10 5A 250VAC 10A 125VAC 1/2HP 125-250VAC	0 SOLDER LUG 1 .250 TAB (QC) 3 .187 TAB (QC) 5 WIRE LEAD	ROCKER A AMBER C CLEAR G GREEN ³ R RED	A AMBER C CLEAR G GREEN LU BLUE R RED
	11 5A 250VAC 10A 125VAC 5A (TUNGSTEN) 125VAC L	ACTUATOR STYLE	PADDLE¹ B BLACK W WHITE	LAMP VOLTAGE
	20 10A 250VAC 15A 125VAC 3/4HP 125-250VAC	P PADDLE PS PADDLE - SHORT T LIGHTED ROCKER	BASE COLOR¹ B BLACK W WHITE	6V 6 VOLT/ INCANDESCENT
	21 10A 250VAC 15A 125VAC			12V 12 VOLT/ INCANDESCENT
	22 10A 250VAC 15A 125VAC 20A 125-250VAC H 3/4HP 125-250VAC			18V 18 VOLT/ INCANDESCENT
				24V 24 VOLT/ INCANDESCENT
				28V 28 VOLT/ INCANDESCENT
				125N 125 VOLT/ NEON
				250N 250 VOLT/ NEON

NOTES:
Shading indicates standard configurations. Stainless steel bezels are available. Add suffix "BEZEL" to the end of the catalog number. (ex.) LTA201-TR-B/12V/BEZEL
Imprinting is available. Please specify when ordering.
Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.
1 Custom colors are available. Consult factory.
2 Neon lamps (125 volt or 250 volt) not recommended with green or blue colored indicators.
3 Specify lens color only if actuator style is P or PS.

