
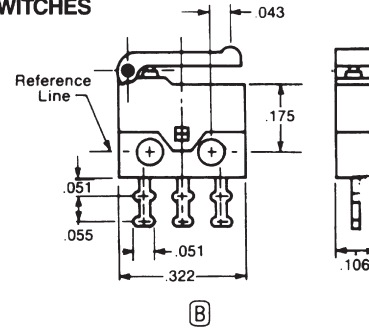


DH SERIES ULTRA SUBMINIATURE SNAP-ACTION SWITCHES



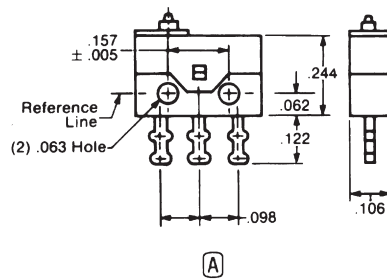


Ultra miniature for dramatic space savings. Just .322" wide x .244" high x .106" deep. Lightweight: 0.3 grams. Designed for low energy applications. Choice of button or lever actuator. Insertion molded terminals; printed circuit mountable. Wave solderable. Automatic assembly insures consistent quality.

Mfr. No.	Fig.	Circuitry	Operating Force (Max. Gms.)	Actuator
DH1C-B1AA	A	SPDT	90	Button
DH1C-B2AA	A	SPDT	90	Button
DH1C-B3AA	A	SPDT	90	Button
DH1C-B1PA	B	SPDT	50	Lever

Mfr. No.	Fig.	Circuitry	Operating Force (Max. Gms.)	Actuator
DH1C-B2PA	B	SPDT	50	Lever
DH1C-B3PA	B	SPDT	50	Lever
DH2C-B1AA	A	SPDT	90	Button
DH2C-B2AA	A	SPDT	90	Button
DH2C-B3AA	A	SPDT	90	Button
DH2C-B1PA	B	SPDT	50	Lever
DH2C-B2PA	B	SPDT	50	Lever
DH2C-B3PA	B	SPDT	50	Lever

DG SERIES SUB-MINIATURE SNAP-ACTION SWITCHES

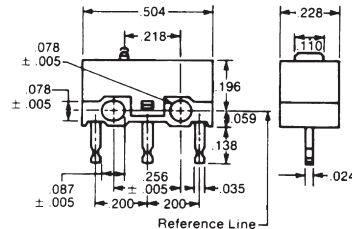


Compact size: .504" long x .255" high x .228" wide. Gold or silver contacts. Insertion molded terminals; printed circuit mountable. Wave solderable. Automatic assembly insures consistent quality. DG1 rated 3 amps at 125 VAC; 2 amps at 30 VDC. DG2 rated 50 mA at 30 VDC.

Mfr. No.	Fig.	Circuitry	Operating Force (Max. Gms.)	Actuator
DG1C-B1AA	A	SPDT	140	Button
DG1C-B1LA	B	SPDT	45	.169" lever
DG1C-B1RA	C	SPDT	45	.075" roller
DG1C-B2AA	A	SPDT	140	Button
DG1C-B2LA	B	SPDT	45	.169" lever
DG1C-B2RA	C	SPDT	45	.075" roller

Mfr. No.	Fig.	Circuitry	Operating Force (Max. Gms.)	Actuator
DG1C-B3AA	A	SPDT	140	Button
DG1C-B3LA	B	SPDT	45	.169" lever
DG1C-B3RA	C	SPDT	45	.075" roller
DG2C-B1AA	A	SPDT	140	Button
DG2C-B1LA	B	SPDT	45	.169" lever
DG2C-B1RA	C	SPDT	45	.075" roller
DG2C-B2AA	A	SPDT	140	Button
DG2C-B2LA	B	SPDT	45	.169" lever
DG2C-B2RA	C	SPDT	45	.075" roller
DG2C-B3AA	A	SPDT	140	Button
DG2C-B3LA	B	SPDT	45	.169" lever
DG2C-B3RA	C	SPDT	45	.075" roller

DN SERIES MINIATURE PRECISION SWITCHES (CONNECTOR ADAPTABLE)

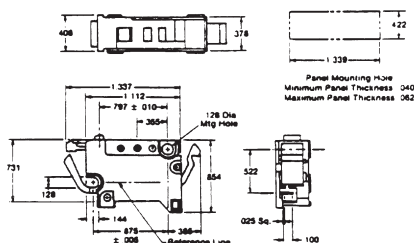

Switches are available with button actuator or with hinged lever or roller actuator, each in high or standard ratio. Terminals are .025" square pins. All switches feature SPST-NO circuitry.

Mfr. No.	Operating Force (Max. Gms.)	Actuator
DN3A-GCAA	75	Button
DN3A-GCLD	35	1.4" lever, standard ratio
DN3A-GCMD	20	1.58" lever, high ratio
DN3A-GCRC	35	1.34" roller, standard ratio
DN3A-GCTC	25	1.516" roller, high ratio
DN6A-GCAA	75	Button
DN6A-GCLD	35	1.4" lever, standard ratio
DN6A-GCMD	20	1.58" lever, high ratio
DN6A-GCRC	35	1.34" roller, standard ratio
DN6A-GCTC	25	1.16" roller, high ratio

S903002 Switches
Relay Special