



VS2-VS3




SPDT



P.C. MOUNTING


OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00



VS2-VS3




DPDT



P.C. MOUNTING


OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00



VS5




DPDT

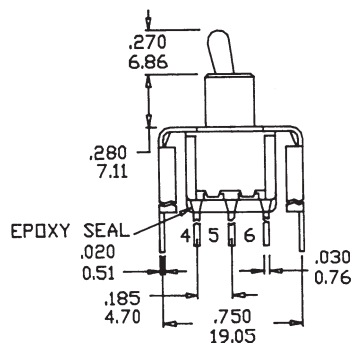

P.C. MOUNTING

OPTION CODE	DIM. 'A'
VS5	.630 16.00



CONTACT MATERIAL OPTIONS

Q

FIXED TERMINAL: Silver plated over copper alloy
MOVING CONTACT: Silver plated over copper alloy
RATING: 5 Amps with resistive load @ 120VAC or 28VDC
 2 Amps with resistive load @ 250VAC

R

FIXED TERMINAL: Copper alloy with gold plate over nickel plate
MOVING CONTACT: Copper alloy with gold plate over nickel plate
RATING: 0.4 Volt-Amps (VA) max. @ 20V max. (AC or DC)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.