


DESIGNER-LINE LIGHTED AND NON-LIGHTED TOGGLE SWITCHES

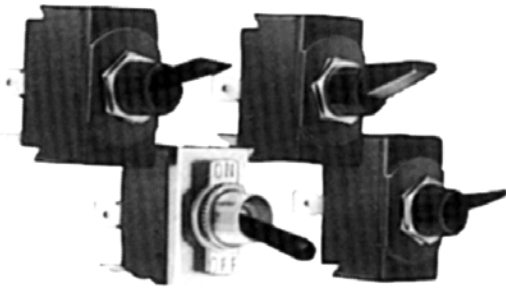

Choice of lighted or non-lighted bats, in choice of colors. Reliable, long-life mechanism. Polycarbonate coverplate standard; die-cast zinc available on special order. 25,000-hour, 14-volt incandescent lamps standard (lighted version); other incandescent and neon lamps available on special order. A variety of single-pole and double-pole, multi-circuit arrangements to choose from. **Terminals:** Spade and solder listed; screw terminals available. **Contact Rating:** 15 A at 277 VAC, 1/4 hp at 125-277 VAC. **Temperature Rating:** 150° C at 85% R.H. **Size:** 1 1/2" W x 1 1/2" H x 5/16" D. UL recognized under the Component Program; CSA approved. Black anodized dress nut available; order No. 0150-9101.

Circuit Arrangement			Poles	Nfr. No.	
A	B	C		Spade Terminals	Solder Terminals
SINGLE-POLE — NO BAT					
On		Off	SPST	0150-1009	0150-1017
On	Off	On	SPDT	0150-1010	0150-1018
On		On	SPDT	0150-1011	0150-1019
(On)	Off	(On)	SPDT	0150-1012	0159-1020
(On)		Off	SPST	0150-1013	0150-1021
DOUBLE-POLE — NO BAT					
On		Off	DPST	0151-1009	0151-1017
On	Off	On	DPDT	0151-1010	0151-1018
On		On	DPDT	0151-1011	0151-1019
(On)	Off	(On)	DPDT	0151-1012	0151-1020
On		(On)	DPDT	0151-1014	0151-1022
On	Off	(On)	DPDT	0151-1015	0151-1023


() = Momentary contact.

ILLUMINATED DESIGNER-LINE TOGGLE SWITCHES

(Available with Standard Plastic Coverplate Only)

Bat Tip Color	SPST Only Circuit Arrangement	Nfr. No.	
		Spade Terminals	Solder Terminals
Red	On-Off	0151-7000	0151-7008
Green	On-Off	0151-7002	0151-7010
Clear	On-Off	0151-7003	0151-7011

DESIGNER-LINE TOGGLE SWITCHES WITH BAT



To order an assembled switch with bat, substitute appropriate code number for the 6th digit in the part number.

Bat Tip Style	Bat Color*	Code No.	Bat Type
0151-X1XX	Red	1	A
0151-X2XX	Black	2	A
0151-X3XX	White	3	A
0151-X4XX	Red	4	B
0151-X5XX	Black	5	B
0151-X6XX	White	6	B
0151-X7XX	Red	7	C
0151-X8XX	Black	8	C
0151-X9XX	White	9	C

*Bat tip can also be furnished in practically any color on special order.

0815 SERIES MINIATURE SNAP-IN ROCKER SWITCHES LIGHTED OR NON-LIGHTED



Choice of illuminated or non-illuminated, two-surface, smooth, colored rocker. Illuminated rockers available in clear, amber, red, blue or green. Non-lighted rockers available in white, black or red; other colors available. Plastic snap-in bezels, available in black or white; other colors available on special order. **Contact Rating:** 12 amps at 125 VAC, 1/2 hp at 125-250 VAC; also available with 15 amp rating, 1/4" Q.C. terminals standard; 16-ga. wire leads available, 115 VAC neon lamps standard; 6, 14, or 28 VAC or VDC lamps or 250 VAC neon lamps available. UL recognized. CSA approved. **Size:** 1.331" H x .890" W x .490" D. Lighted version available with SPST circuitry only.

Nfr. No.	Circuit Arrangement			Poles	Lights
	A	B	C		
0815-1213	On		Off	SPST	None
0815-1243	On		On	SPDT	None
0815-1253	On	Off	On	SPDT	None
0815-5213	On		Off	SPST	1


METAL-CASED, SNAP-ACTION SWITCHES



Metal-cased, snap-action switches for control and indicating circuits. Rated 20 amps at 125-250 VAC; 1 hp at 125 VAC; 10 amps at 125 VAC lamp load; 2 hp at 250 VAC; 1/2 amp at 125 VDC; 1/4 amp at 250 VDC. Switch mounting is designated right-hand or left-hand by number according to the location of the actuator on the mounted switch. To specify left hand mounting, change the 8th digit of the part number from "0" to "2"; prices are the same.

Nfr. No.	Description
1503-0100	Sealed plunger
1503-0300	Sealed roller plunger
1503-0500	Wobble stick
1503-0600	Adjustable hand knob
1503-0700	Adjustable roller lever
1503-0800	Spring roller lever

WORLD'S SMALLEST SNAP-ACTION SWITCH

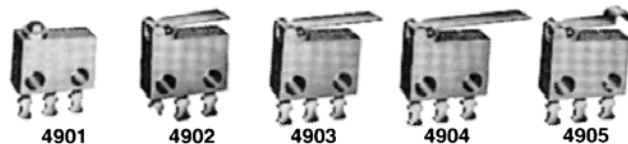

Fine silver contacts. Double turret terminals molded into case. **Rated:** 1 amp at 125-250 VAC; 1 amp resistive, 30 VDC; 1 amp inductive, 30 VDC. **Size:** Case, .300" W x .100" D x .250" H.

Nfr. No.	Actuator Type	Operating Force
SPDT Switches		
4901-2100	Pin plunger	4oz.
4902-2100	Short lever	36gm
4903-2100	Medium lever	31gm
4904-2100	Long lever	20gm
4905-2100	Formed lever	36gm
4906-2100	Long formed lever	22gm

2 SWITCHES & KNOBS