Momentary / Maintained / Signal Lamps

Rectangular straight bezel style, 18x24





	Faston Connection	Solder Connection
Momentary switches	501015	501115
Maintained switches	511015	511115
Signal lamps	551015	551115

Lens flat 15x21		
	Opaque	Transparent
white	560011	561011
yellow	560111	561111
green	560211	561211
blue	560311	561311
red	560411	561411
black	560511	
orange	560611	561611

Square straight bezel style, 18x18





	Faston Connection	Solder Connection
Momentary switches	503015	503115
Maintained switches	513015	513115
Signal lamps	553015	553115

Lens flat 15x15		
	Opaque	Transparent
white	562011	563011
yellow	562111	563111
green	562211	563211
blue	562311	563311
red	562411	563411
black	562511	
orange	562611	563611

Round bezel style, Ø18





	Faston Connection	Solder Connection
Momentary switches	505015	505115
Maintained switches	515015	515115
Signal lamps	555015	555115

Lens flat Ø15		
	Opaque	Transparent
white	564011	565011
yellow	564111	565111
green	564211	565211
blue	564311	565311
red	564411	565411
black	564511	
orange	564611	565611

ORDER CONTACT BLOCK SEPARATELY

COMMON INFORMATION

The switch is dust proof and oil tight and is submersible up to 1.2 meters. Exceeds NEMA 6.

When using incandescent lamps ambient temperature = max. 55°C.

CONTACT BLOCKS TO BE SPECIFIED SEPARATELY. Lamp holder T $1\frac{3}{4}$ MG

PANEL CUT-OUTS FOR UP TO 2 SINGLE CONTACT BLOCKS (18X18 AND Ø18 STYLE ONLY).



PANEL CUT-OUTS FOR UP TO 1 SINGLE + 1 DOUBLE CONTACT BLOCK


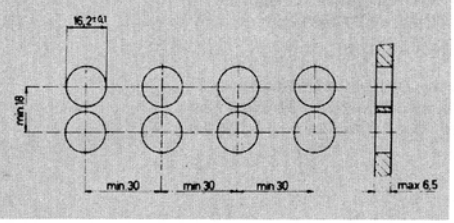
PANEL CUT-OUTS FOR UP TO 2 DOUBLE CONTACT BLOCKS