




Series RSB3

4

T E R M I N A L B L O C K S

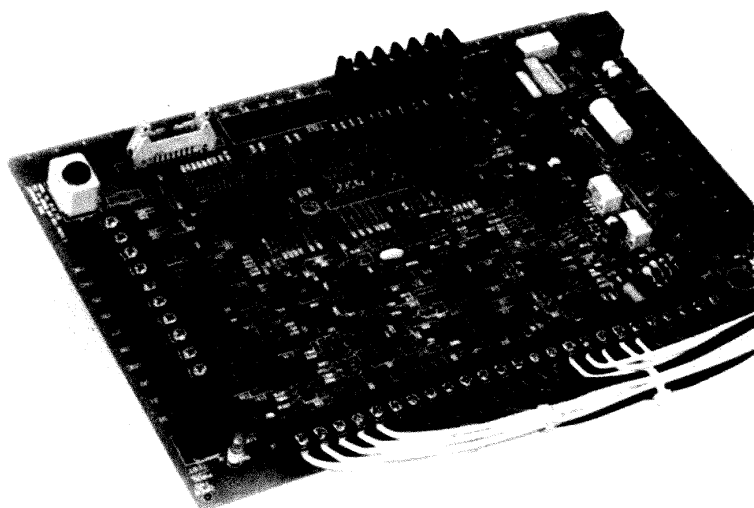

- Optional plug-in socket
- .325 in. circuit spacing
- Maximum tri-barrier circuit isolation
- Fast wiring – backed-out, wire-ready screws
- Interrupted thread prevents screws from falling out
- 300V rating
- Phil-slot screws accept both Phillips and straight screwdrivers
- Five bottom terminal styles
- Stand-offs allow flux and solvents to drain during soldering
- Flame retardant Polypropylene insulator
- #14 max AWG wire range
- Strip lengths from 2 to 36 circuits

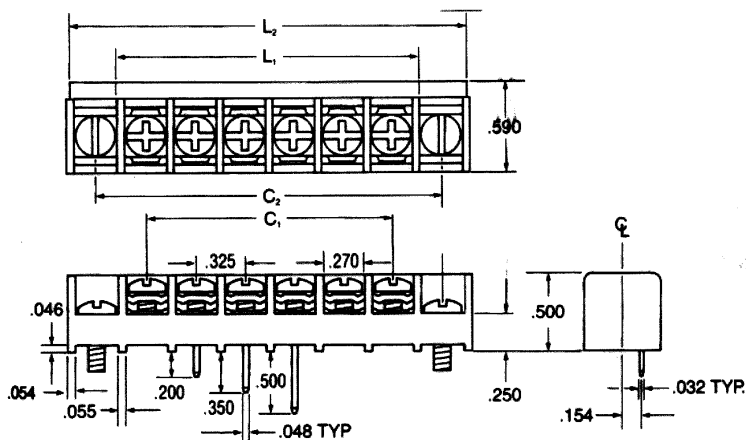

DIMENSIONS (All dimensions in inches)

Computing Barrier Block Lengths

Direct Mounting: Use C_1 and L_1 for Mounting Option "P."

End Position Mounting: Use C_2 and L_2 for Mounting Option "M."

CKTS. (not positions)	C_1 in.	L_1^* in.	C_2 in.	L_2^* in.
02	.325	.704	.975	1.354
03	.650	1.029	1.300	1.679
04	.975	1.354	1.625	2.004
05	1.300	1.679	1.950	2.329
06	1.625	2.004	2.275	2.654
07	1.950	2.329	2.600	2.979
08	2.275	2.654	2.925	3.304
09	2.600	2.979	3.250	3.629
10	2.925	3.304	3.575	3.954
11	3.250	3.629	3.900	4.279
12	3.575	3.954	4.225	4.604
13	3.900	4.279	4.550	4.929
14	4.225	4.604	4.875	5.254
15	4.550	4.929	5.200	5.579
16	4.875	5.254	5.525	5.904
17	5.200	5.579	5.850	6.229
18	5.525	5.904	6.175	6.554
19	5.850	6.229	6.500	6.879

CKTS. (not positions)	C_1 in.	L_1^* in.	C_2 in.	L_2^* in.
20	6.175	6.554	6.825	7.204
21	6.500	6.879	7.150	7.529
22	6.825	7.204	7.475	7.854
23	7.150	7.529	7.800	8.179
24	7.475	7.854	8.125	8.504
25	7.800	8.179	8.450	8.829
26	8.125	8.504	8.775	9.154
27	8.450	8.829	9.100	9.479
28	8.775	9.154	9.425	9.804
29	9.100	9.479	9.750	10.129
30	9.425	9.804	10.075	10.454
31	9.750	10.129	10.400	10.779
32	10.075	10.454	10.725	11.104
33	10.400	10.779	11.050	11.429
34	10.725	11.104	11.375	11.754
35	11.050	11.429		
36	11.375	11.754		

* L_2 and L_1 are based on molded-to-length strips.